[INCH-POUND]
A-A-55485/6A
June 1, 1995
SUPERSEDING
A-A-55485/6
September 30, 1993

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, FOR RELAYS AND DISCRETE COMPONENTS

The General Services Administration has authorized the use of this commercial item description (CID) by all federal agencies as a replacement for MIL-M-38527/6D.

1. SCOPE

1.1 General. This CID describes commercial mounting pads used with small electronic components.

1.2 Intended use. The mounting pads described herein are used to facilitate the attachment of relays and discrete components to circuit boards, to provide component spacing, and to facilitate board cleaning.

2. CLASSIFICATION

2.1 Classification. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown (see 6.1). The PIN shall be A-55485/06- (plus a dash number from figure 1 and a material letter as shown in 3.1). Complete PIN example: A-55485/06-001D. NOTE: Cylindric shaped standoffs use a unique PIN format as described on figure 1.

3. SALIENT CHARACTERISTICS

3.1 Material. Material shall be diallyl phthalate (D), nylon (N), or polyterephthalate thermoplastic (C).

3.2 Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance provisions shall be as specified in A-A-55485.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in A-A-55485.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 Ordering data. Ordering data shall be as specified in A-A-55485.

6.3 Supersession data. Supersession data is shown in table I.

6.4 Suggested sources of supply. Suggested sources of supply are shown in table II. Additional sources will be added as they become available. The vendors listed have submitted certificates of compliance to DESC-ELDM and meet the market acceptability requirements of this CID.


6.5 CAGE code. The CAGE code for this CID is 58536.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-5255, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5999

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:48Z
Check the source to verify that this is the current version before use.

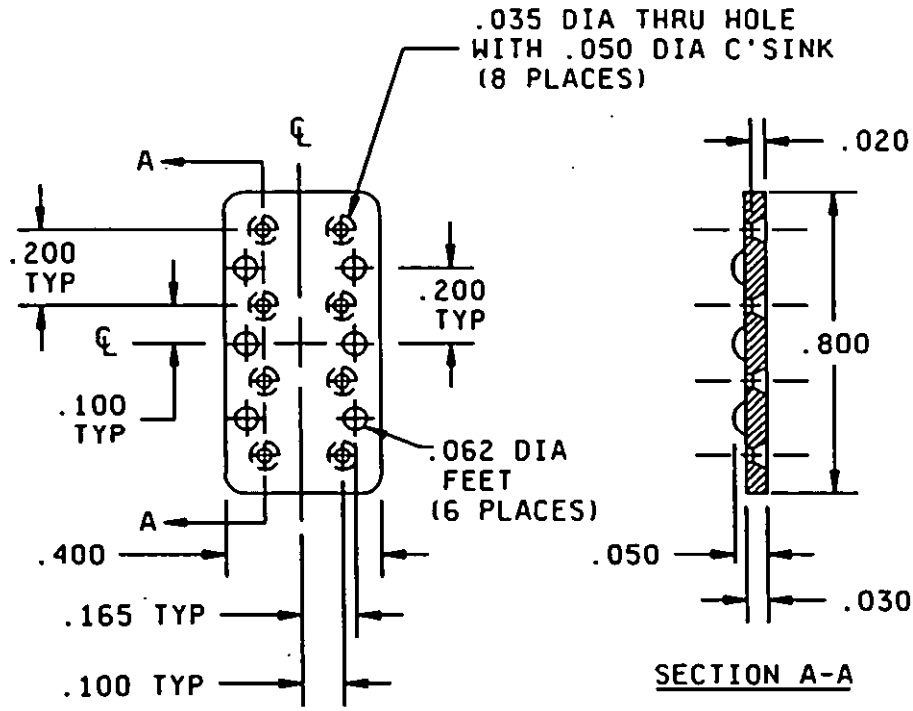


A-55485/06-001

Inches	mm
.005	0.13
.020	0.51
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.100	2.54
.165	4.19
.200	5.08
.400	10.16
.800	20.32

Figure 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

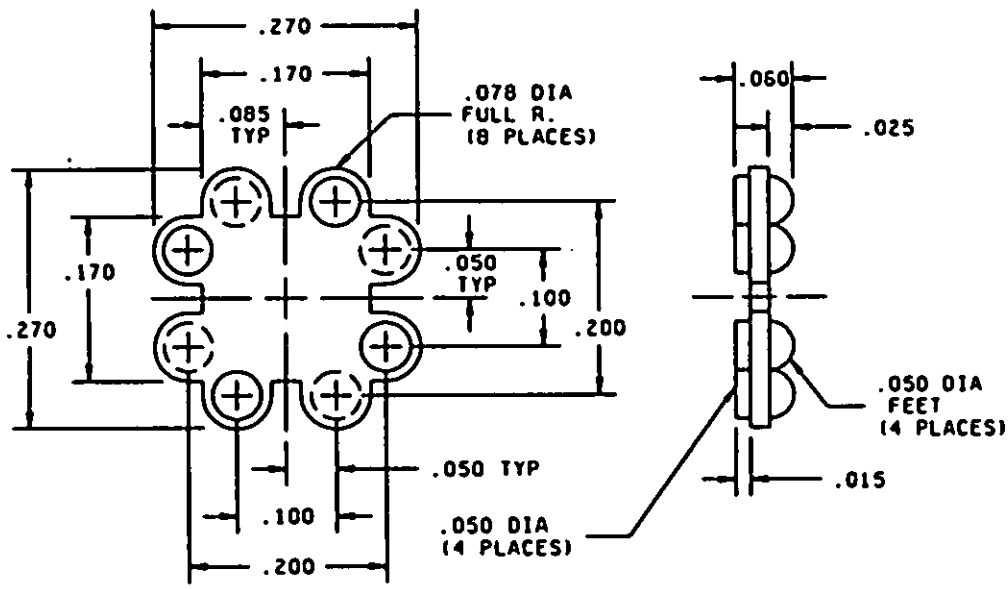


Inches	mm
.015	0.38
.025	0.64
.050	1.27
.060	1.52
.078	1.98
.085	2.16
.100	2.54
.170	4.32
.200	5.08
.270	6.86

A-55485/06-002

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

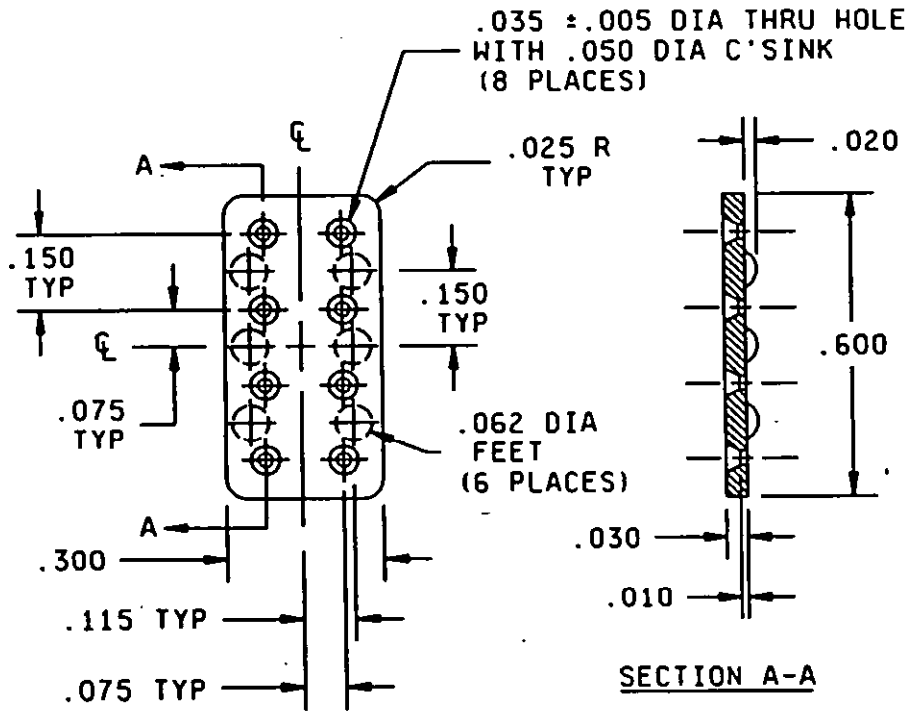


A-55485/06-003

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.90
.115	2.92
.150	3.81
.300	7.62
.600	15.24

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

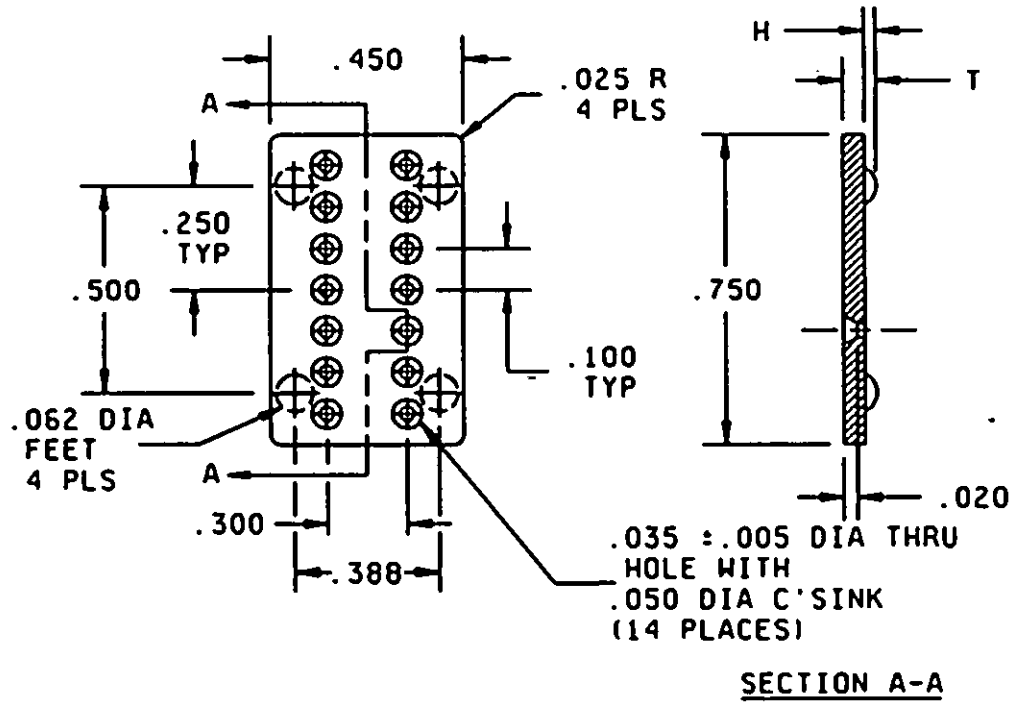


PIN A-55485/06-	H	T
004	no feet	.030 (0.76)
005	.020 Min (0.51)	.065 Max (1.65)
006	.050 (1.27)	.080 (2.03)

Inches	mm
.020	0.51
.025	0.64
.035	0.89
.040	1.27
.062	1.57
.100	2.54
.250	6.35
.300	7.62
.388	9.86
.450	11.43
.750	19.05

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

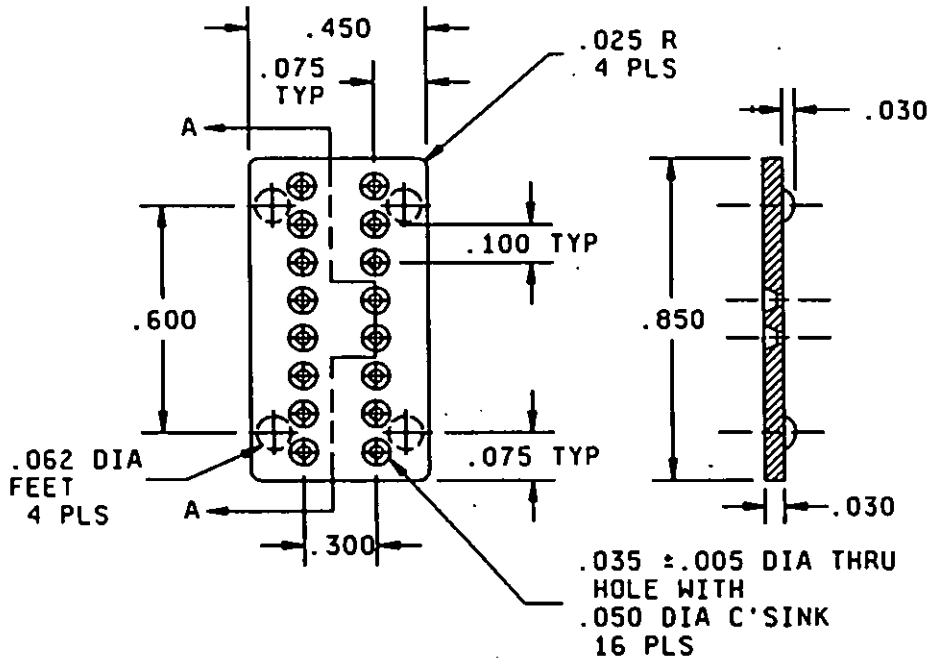


A-55485/06-007

Inches	mm
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.91
.100	2.54
.300	7.62
.450	11.43
.600	15.24
.850	21.59

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

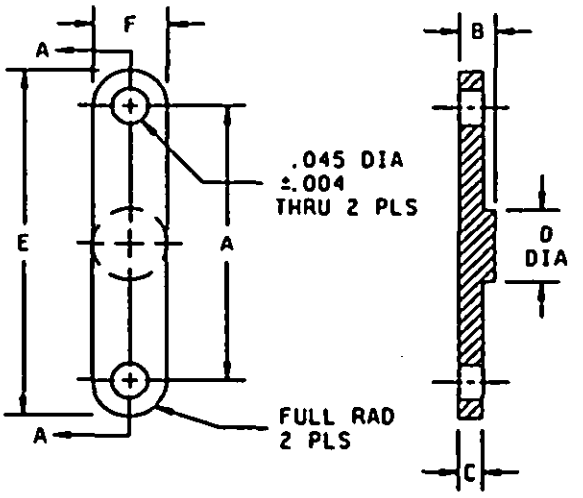


SECTION A-A

PIN A-55485/06-	A	B	C	D	E	F
008	.100 (2,54)	.045 (1,14)	.022 (,56)	.050/.070 (1,27)(1,78)	.180 (4,57)	.090 (2,29)
009	.150 (3,81)	.045 (1,14)	.022 (,56)	.090/.125 (2,29)(3,18)	.270 (6,86)	.125 (3,18)
010	.200 (5,08)	.045 (1,14)	.022 (,56)	.090 (2,29)	.290 (7,37)	.090 (2,89)
017	.250 (6,36)	.045 (1,14)	.026 (,82)	.090 (2,29)	.340 (8,89)	.090 (2,29)
018	.300 (7,62)	.045 (1,14)	.026 (,82)	.140 (3,81)	.390 (9,91)	.090 (2,29)
019	.350 (8,90)	.045 (1,14)	.030 (,76)	.140 (3,81)	.440 (11,18)	.090 (2,29)
020	.400 (10,16)	.045 (1,14)	.030 (,76)	.190 (4,82)	.490 (12,45)	.090 (2,29)
021	.500 (12,7)	.045 (1,14)	.030 (,76)	.190 (4,82)	.590 (14,99)	.090 (2,29)


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:48Z
Check the source to verify that this is the current version before use.

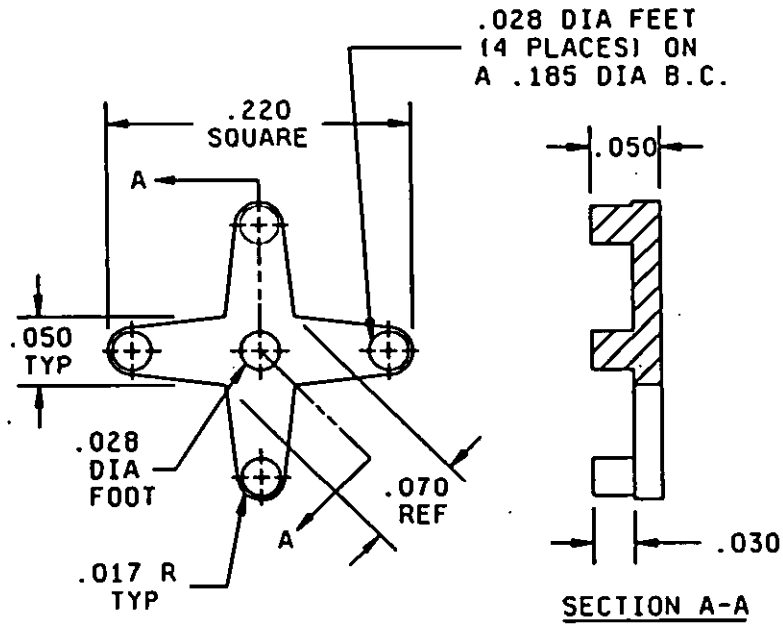

Inches	mm
.017	0.43
.028	0.71
.030	0.76
.050	1.27
.070	1.78
.185	4.70
.220	5.59

A-55485/06-011

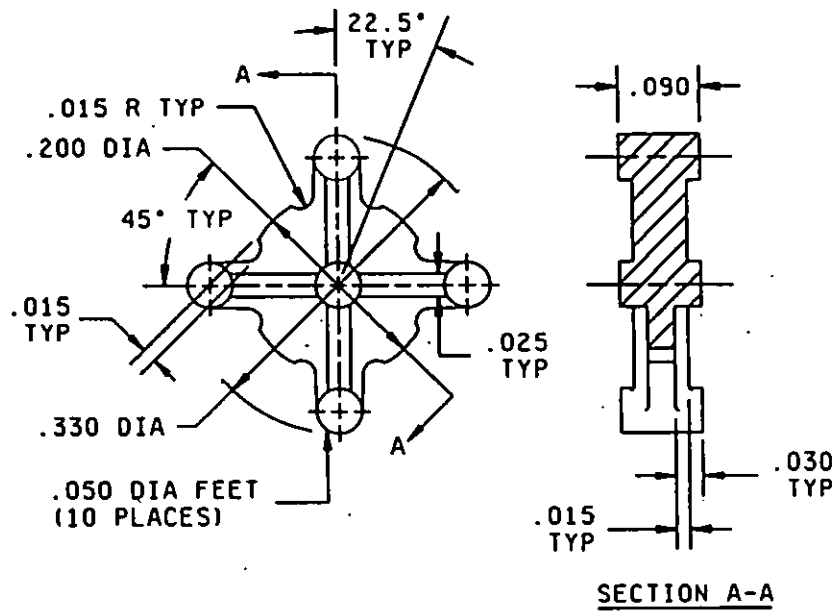


Inches	mm
.015	0.38
.025	0.64
.030	0.76
.050	1.27
.090	2.29
.200	5.08
.330	8.38

A-55485/06-012


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

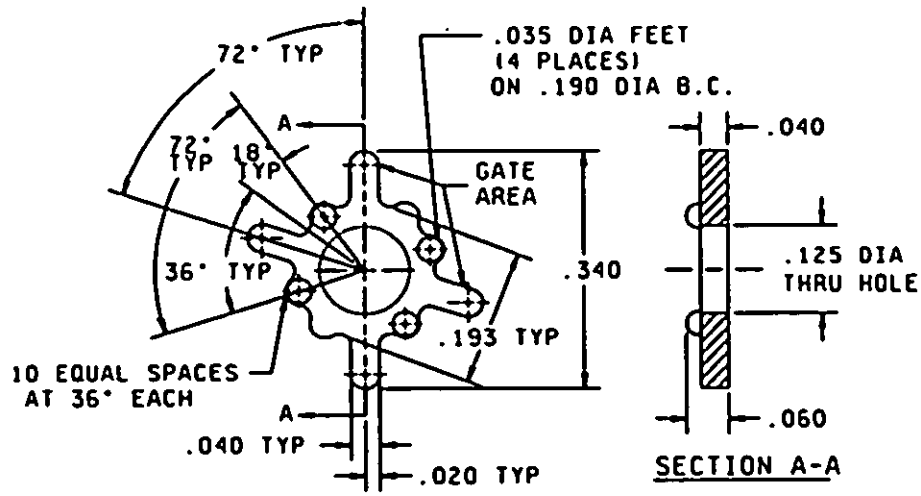

Inches	cm
.020	0.51
.035	0.89
.040	1.02
.060	1.52
.125	3.18
.190	4.83
.193	4.90
.340	8.64

A-55485/06-013

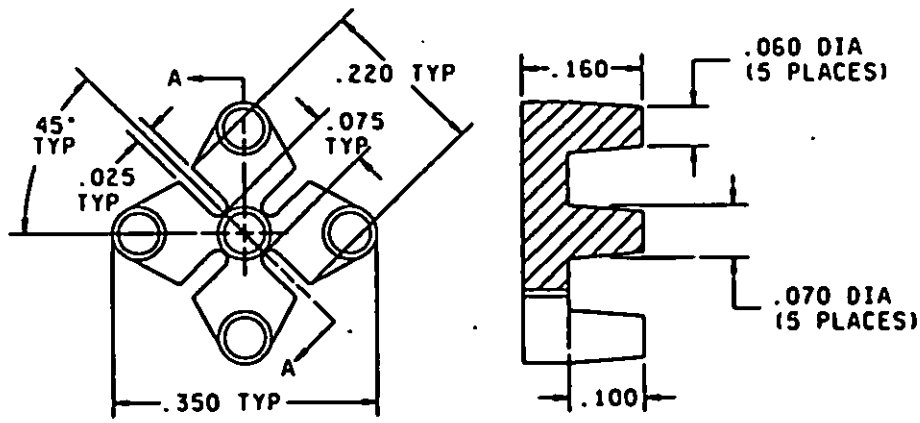


Inches	cm
.025	0.64
.060	1.52
.070	1.78
.075	1.91
.100	2.54
.160	4.06
.220	5.59
.350	8.89

A-55485/06-014


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

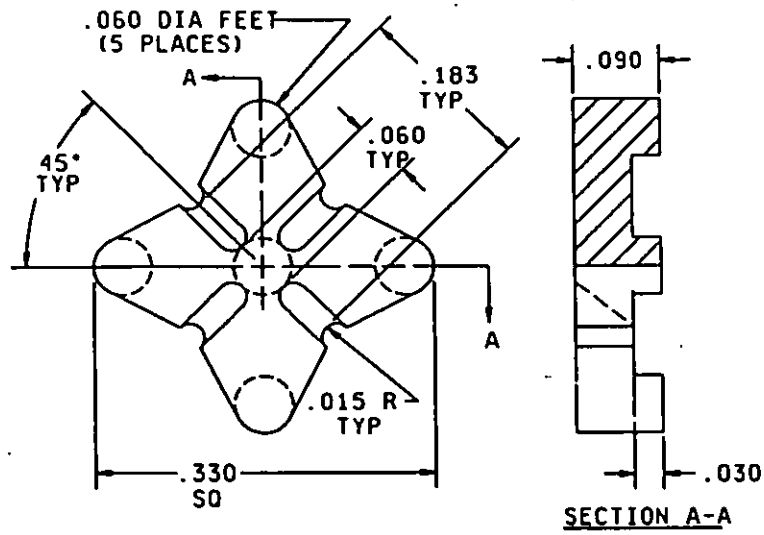

Inches	mm
.015	0.38
.030	0.76
.060	1.52
.090	2.29
.183	4.65
.330	8.38

A-55485/06-015

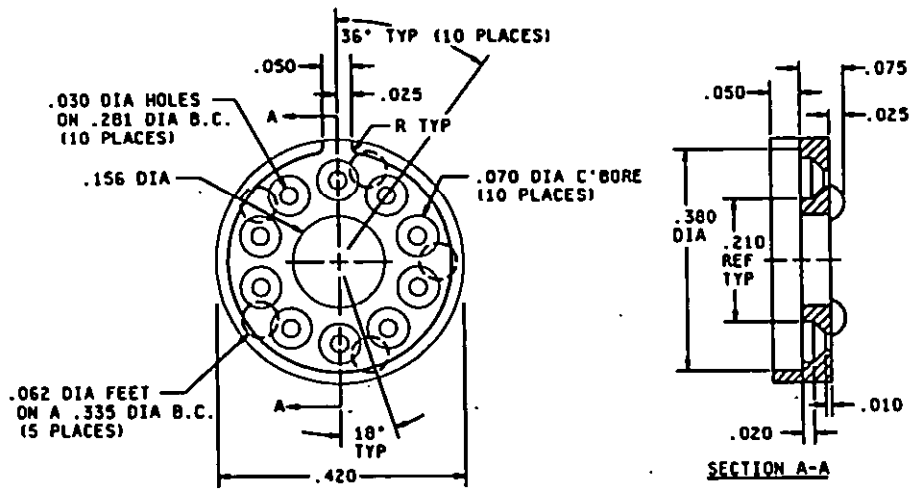


Inches	mm
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.050	1.27
.062	1.57
.070	1.77
.156	3.96
.210	5.33
.281	7.14

A-55485/06-016

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

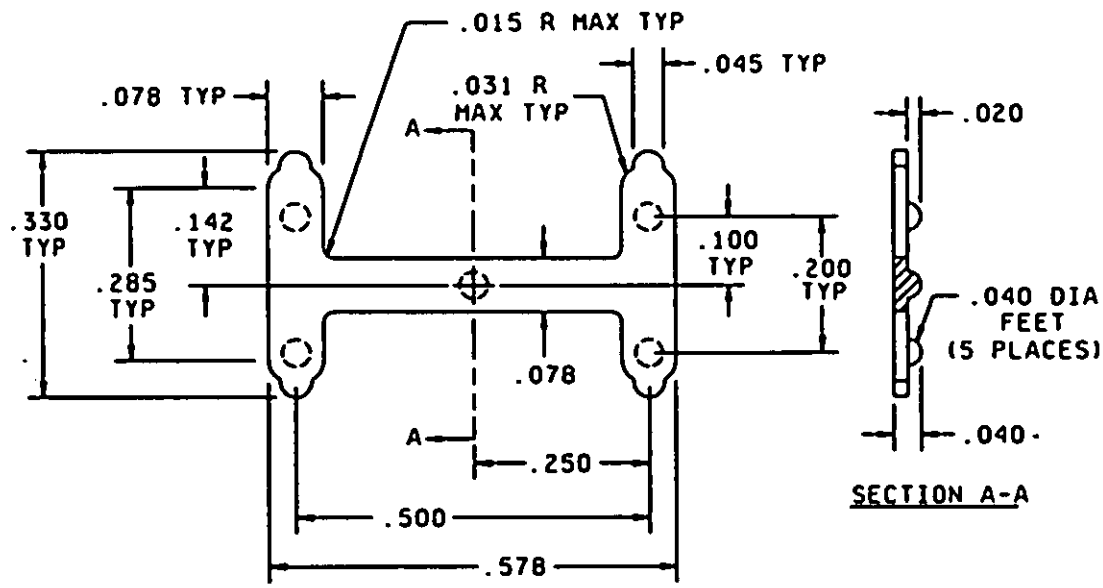


A-55485/06-022

Inches	mm
.015	0.38
.020	0.51
.031	0.71
.040	1.02
.045	1.14
.078	1.98
.100	2.54
.142	3.61
.200	5.08
.250	6.35
.285	7.24
.330	8.38
.500	12.70
.578	14.60

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:48Z
Check the source to verify that this is the current version before use.

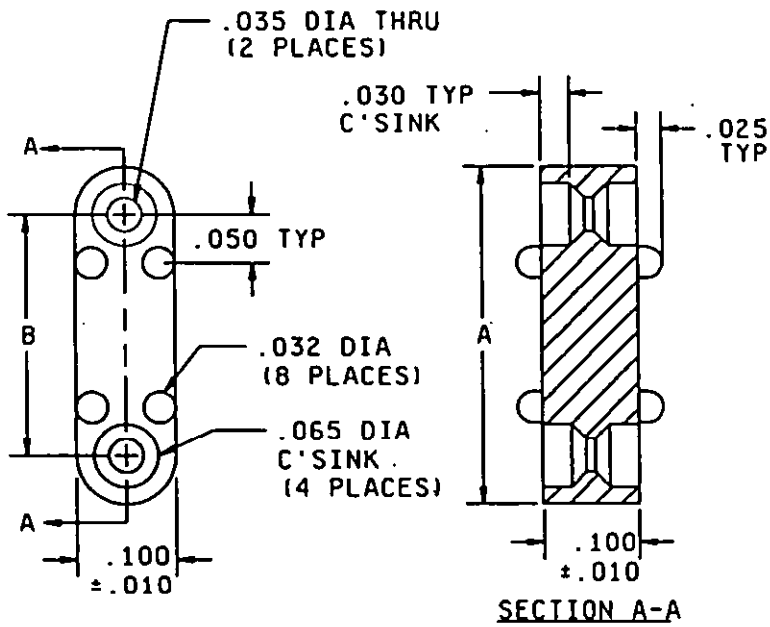


Inches	mm
.025	0.64
.030	0.76
.032	0.81
.035	0.89
.050	1.27
.065	1.65
.100	2.54

PIN A-55485/06-	A	B	PIN A-55485/06	A	B
023	.300 (7.62)	.200 (5.08)	026	.450 (11.43)	.350 (8.89)
024	.350 (8.89)	.250 (6.35)	027	.500 (12.70)	.400 (10.16)
025	.400 (10.16)	.300 (7.62)	028	.600 (15.24)	.500 (12.70)


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:48Z
Check the source to verify that this is the currentversion before use.

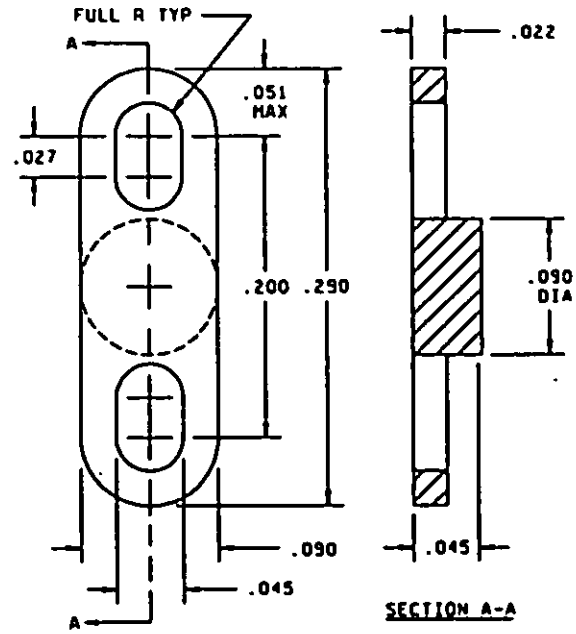

Inches	mm
.022	0.56
.027	0.69
.045	1.14
.051	1.30
.090	2.29
.200	5.08
.290	7.37

A-55485/06-043

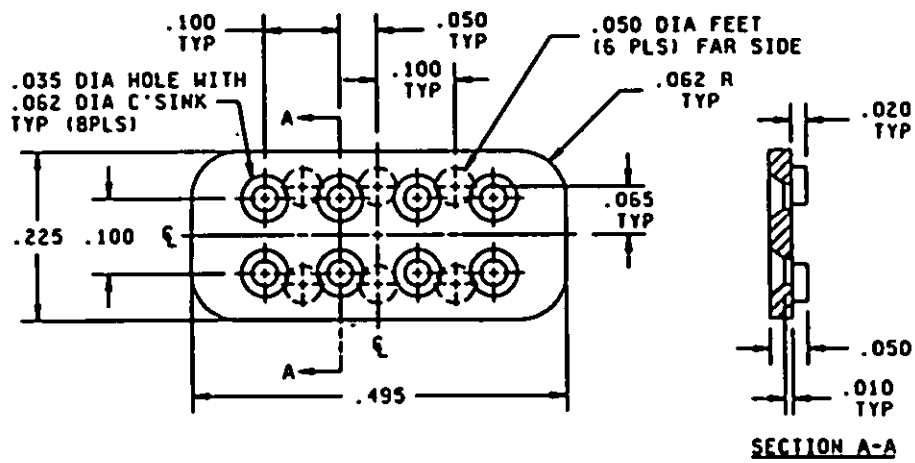


Inches	mm
.010	0.25
.020	0.51
.035	0.89
.050	1.27
.062	1.57
.065	1.65
.100	2.54
.495	12.57

A-55485/06-044


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

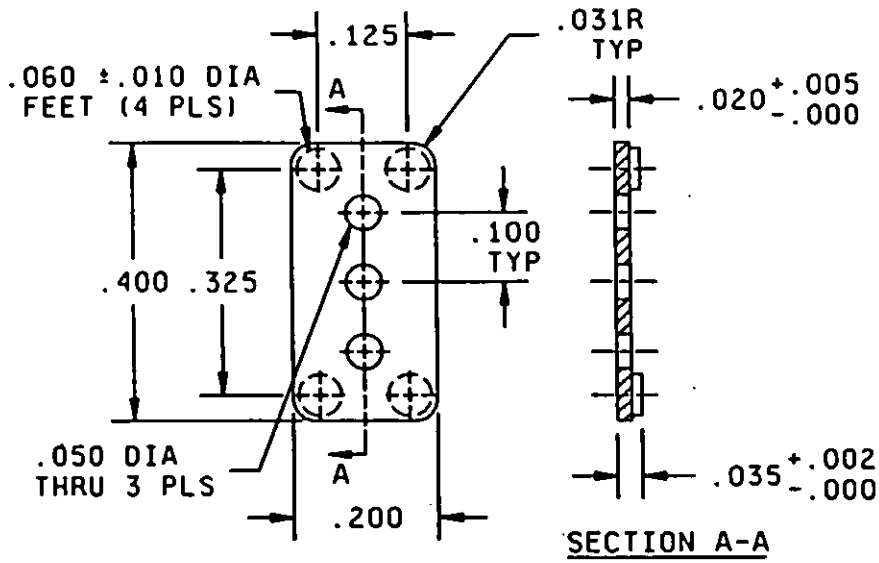

Inches	mm
.002	0.05
.005	0.13
.020	0.51
.031	0.79
.035	0.89
.050	1.27
.060	1.52
.100	2.54
.125	3.18
.200	5.08
.325	8.26
.400	10.16

A-55485/06-045

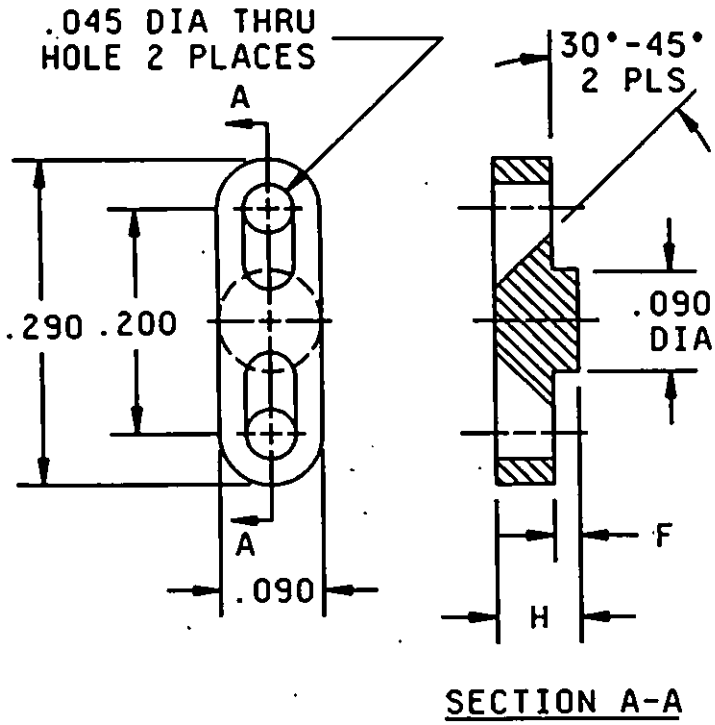


Inches	mm
.022	0.56
.035	0.89
.045	1.14
.050	1.27
.072	1.83
.085	2.16
.090	2.29
.200	5.08
.290	7.37

PIN A-55485/06-	H	F
046	.072	.022
047	.050	.000
048	.085	.035

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

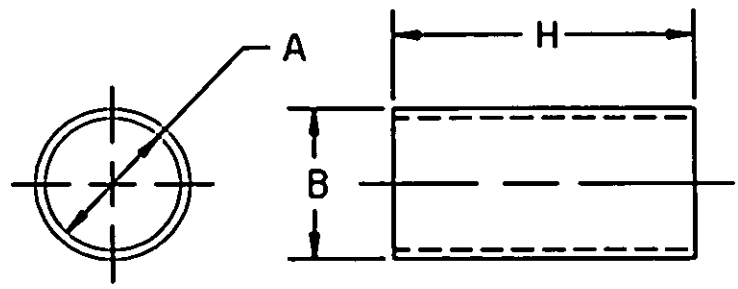

1/ PIN A55485/06	"A" dimension ±.005 (0,13 mm)	"B" dimension ±.005 (0,13 mm)	1/ 2/ "H" dimension	1/ PIN A55485/06	"A" dimension ±.005 (0,13 mm)	"B" dimension ±.005 (0,13 mm)	1/ 2/ "H" dimension
A	.028 (0.71)	.085 (2.16)	.030 - 1.250 (0.76)-(31.75)	H	.063 (1.60)	.187 (4.75)	.030 - 1.250 (0.76)-(31.75)
B	.032 (0.81)	.085 (2.16)	.030 - 1.250 (0.76)-(31.75)	J	.091 (2.31)	.187 (4.75)	.030 - 1.250 (0.76)-(31.75)
C	.032 (0.81)	.125 (3.18)	.030 - 1.250 (0.76)-(31.75)	K	.120 (3.05)	.187 (4.75)	.030 - 1.250 (0.76)-(31.75)
D	.047 (1.19)	.125 (3.18)	.030 - 1.250 (0.76)-(31.75)	L	.091 (2.31)	.250 (6.35)	.030 - 1.250 (0.76)-(31.75)
E	.085 (2.16)	.148 (3.76)	.030 - 1.250 (0.76)-(31.75)	M	.115 (2.92)	.250 (6.35)	.030 - 1.250 (0.76)-(31.75)
F	.047 (1.19)	.156 (3.96)	.030 - 1.250 (0.76)-(31.75)	N	.147 (3.73)	.250 (6.35)	.030 - 1.250 (0.76)-(31.75)
G	.105 (2.67)	.167 (4.24)	.030 - 1.250 (0.76)-(31.75)	P	.171 (4.34)	.250 (6.35)	.030 - 1.250 (0.76)-(31.75)

1/ Cylindric standoffs have a unique PIN format which must be used when ordering. A letter (A through P in the first column above) is keyed to the desired "A" and "B" dimensions and is used as the basic dash number. The desired "H" dimension (from .030 to 1.250 in .005 inch increments) is then called out using a four-digit number (no decimals). For example, a desired "H" dimension of .030 inch would be shown in the PIN as 0030. A desired "H" dimension of 1.005 inch would be shown in the PIN as 1005. An "H" dimension of 1.250 inch would be shown in the PIN as 1250. The final digit of the PIN shall be a letter (D, N, or C) to denote the desired material. Complete PIN examples: A55485/06800850; A55485/06F0935N; A55485/06P1225C.

2/ The following tolerances apply to dimension H:
.030 (0.76 mm) to .500 (12.70 mm): ±.005 (0.13 mm).
.505 (12.83 mm) to .750 (19.05 mm): ±.008 (0.20 mm).
.755 (19.18 mm) to 1.250 (31.75 mm): ±.015 (0.38 mm).

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pads shall be ±.015 (0.38 mm), unless otherwise specified.
4. Tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles, unless otherwise specified.
5. A .010 (0.25 mm) radius is permissible on corners and edges and a 1° draft is permitted on sides.

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Supersession data. 1/

Superseded PIN in accordance with MIL-M-38527/6D: M38527/06-	Replacement CID PIN in accordance with A-A-55485/6, dated September 30, 1993: A-55485/06-	2/ PIN changes in accordance with A-A-55485/6A dated June 1, 1995:
001	001	
002	002	
003	003	
004	004	
005	005	
006	006	
007	007	
008	008	
009	009	
010	010	
011	011	
012	012	
013	013	
014	014	
015	015	
016	016	
017	017	
018	018	
019	019	
020	020	
021	021	
022	022	
023	023	
024	024	
025	025	
026	026	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Supersession data - Continued. 1/

Superseded PIN in accordance with MIL-M-38527/6D: M38527/06-	Replacement CID PIN in accordance with A-A-55485/6, dated September 30, 1993: A-55485/06-	2/ PIN changes in accordance with A-A-55485/6A dated June 1, 1995:
027	027	
028	028	
029	029	A55485/06A
030	030	A55485/06B
031	031	A55485/06C
032	032	A55485/06D
033	033	A55485/06E
034	034	A55485/06F
035	035	A55485/06G
036	036	A55485/06H
037	037	A55485/06J
038	038	A55485/06K
039	039	A55485/06L
040	040	A55485/06M
041	041	A55485/06N
042	042	A55485/06P
043	043	
044	044	
045	045	
046	046	
047	047	
048	048	

1/ All PIN's shall include a suffix letter (D, N, or C) to denote the material. The suffix letters in MIL-M-38527 and A-A-55485 are identical.
2/ New PIN's for superseded dash numbers -029 through -042 shall include a 4-digit "H" dimension callout (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:48Z
Check the source to verify that this is the currentversion before use.

TABLE II. Suggested sources of supply. 1/

2/ CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 3/						
	CAGE code 0ZK84	CAGE code 13103	CAGE code 21071	4/ CAGE code 24227	4/ CAGE code 32559	5/ CAGE code 53174	4/ CAGE code 54355
001D	10105D	7717-175D	10364-2			AP-128/D	965-982D
001N	10105N	7717-175N	10364-1			AP-128/N	965-982N
001C			10364-3			AP-128/GP	965-982C
002D	10511D		10802-2			AP-402/D	965-592D
002N	10511N		10802-1			AP-402/N	965-592N
002C			10802-3			AP-402/GP	965-592C
003D	10537D		10760-2			AP-481/D	965-579D
003N	10537N	7717-129N	10760-1			AP-481/N	965-579N
003C			10760-3			AP-481/GP	965-579C
004D	10557D		10862-2			DIP-14-82/D	965-619D
004N	10557N		10862-1	4130	814-030	DIP-14-82/N	965-619N
004C			10862-3			DIP-14-82/GP	965-619C
005D	10558D					DIP-14-84/D	965-664D
005N	10558N	7717-156N		4160	814-060	DIP-14-84/N	965-664N
005C							
006D	10559D		10866-2			DIP-14-80/D	965-665D
006N	10559N		10866-1	4180	814-080	DIP-14-80/N	965-665N
006C			10866-3			DIP-14-80/GP	965-665C
007D	10560D						
007N	10560N			4360	816-060	DIP-16-85/N	965-663N
007C							
008D	10561D		10852-2			CX-010/D	965-609D
008N	10561N		10852-1	8100	300-100	CX-010/N	965-609N
008C			10852-3			CX-010/GP	965-609C
009D	10562D		10832-2			CX-015/D	965-669D
009N	10562N		10832-1	8150	301-150	CX-015/N	965-669N
009C			10832-3			CX-015/GP	965-669C
010D	10563D		10854-2			CX-020/D	965-671D
010N	10563N		10854-1	8200	302-200	CX-020/GP	965-671N
010C			10854-3			CX-020/GP	965-671C
011D	10259D		10686-2			AP-504/D	965-673D
011N							
011C			10686-3				965-673C
012D	10134D		10324-2			AP-227/D	965-598D
012N	10134N		10324-1			AP-227/N	965-598N
012C			10324-3			AP-227/GP	965-598C

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply - Continued. 1/

2/ CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 3/						
	CAGE code 0ZK84	CAGE code 13103	CAGE code 21071	4/ CAGE code 24227	4/ CAGE code 32559	5/ CAGE code 53174	4/ CAGE code 54355
013D	10010D						
013N	10010N						
013C							
014D	10265D						
014N	10265N						
014C							
015D	10269D		10546-2			AP-436/D	965-677D
015N	10269N		10546-1			AP-436/N	965-677N
015C			10546-3			AP-436/GP	965-677C
016D	10235D						
016N	10235N						
016C							
017D	10581D						
017N	10581N			8250	303-250	CX-2014/N	965-825N
017C							
018D	10582D		10562-2			CX-2015/D	965-830D
018N	10582N		10562-1	8300	304-300	CX-2015/N	965-830N
018C			10562-3			CX-2015/GP	965-830C
019D	10583D						
019N	10583N			8350	305-350	CX-2016/N	965-835N
019C							
020D	10584D		10565-2			CX-2017/D	965-840D
020N	10584N		10565-1	8400	306-400	CX-2017/N	965-840N
020C			10565-3			CX-2017/GP	965-840C
021D	10585D		10566-2			CX-2018/D	965-850D
021N	10585N		10566-1	8500	307-500	CX-2018/N	965-850N
021C			10566-3			CX-2018/GP	965-850C
022D			10602-2			AP-505/D	965-754D
022N			10602-1				965-754N
022C			10602-3				965-754C
023D							
023N		7731		8201	311-200	CX-8201/N	965-686N
023C							
024D							
024N		7732		8202	312-250	CX-8202/N	965-688N
024C							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply - Continued. 1/

2/ CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 3/						
	CAGE code 0ZK84	CAGE code 13103	CAGE code 21071	4/ CAGE code 24227	4/ CAGE code 32559	5/ CAGE code 53174	4/ CAGE code 54355
025D							
025N		7733		8203	313-300	CX-8203/N	965-689N
025C							
026D							
026N		7734		8204	314-350	CX-8204/N	965-756N
026C							
027D							
027N		7735		8205	315-400	CX-8205/N	965-757N
027C							
028D							
028N		7736		8206	316-500	CX-8206/N	965-691N
028C							
A55485/06AXXXXD							
A55485/06AXXXXN				5XXX-F	901-XXX	BX-8001-XXX/N	965-765-XXXN
A55485/06AXXXXC							
A55485/06BXXXXD							
A55485/06BXXXXN					938-XXX	BX-8002-XXX/N	965-781-XXXN
A55485/06BXXXXC							
A55485/06CXXXXD							
A55485/06CXXXXN				5XXX-E	902-XXX	BX-8003-XXX/N	965-758-XXXN
A55485/06CXXXXC							
A55485/06DXXXXD							
A55485/06DXXXXN					939-XXX	BX-8004-XXX/N	965-764-XXXN
A55485/06DXXXXC							
A55485/06EXXXXD							
A55485/06EXXXXN				5XXX-A	906-XXX	BX-8005-XXX/N	965-807-XXXN
A55485/06EXXXXC							
A55485/06FXXXXD							
A55485/06FXXXXN				5XXX-G	903-XXX	BX-8006-XXX/N	965-784-XXXN
A55485/06FXXXXC							
A55485/06GXXXXD			10682-2				965-766-XXXD
A55485/06GXXXXN			10682-1	5XXX-B	907-XXX	BX-8007-XXX/N	965-766-XXXN
A55485/06GXXXXC			10682-3				965-766-XXXC
A55485/06HXXXXD							
A55485/06HXXXXN				5XXX-H	904-XXX	BX-8008-XXX/N	965-759-XXXN
A55485/06HXXXXC							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply. 1/

2/ CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 3/						
	CAGE code 0ZK84	CAGE code 13103	CAGE code 21071	4/ CAGE code 24227	4/ CAGE code 32559	5/ CAGE code 53174	4/ CAGE code 54355
A55485/06JXXXD							
A55485/06JXXXN				5XXX-M	913-XXX	BX-8009-XXX/N	965-760-XXXN
A55485/06JXXXC							
A55485/06KXXXD							
A55485/06KXXXN				5XXX-C	908-XXX	BX-8010-XXX/N	965-801-XXXN
A55485/06KXXXC							
A55485/06LXXXD							
A55485/06LXXXN				5XXX-J	910-XXX	BX-8011-XXX/N	965-787-XXXN
A55485/06LXXXC							
A55485/06MXXXD							
A55485/06MXXXN				5XXX-K	911-XXX	BX-8012-XXX/N	965-791-XXXN
A55485/06MXXXC							
A55485/06NXXXD			10640-2				965-770-XXXD
A55485/06NXXXN			10640-1	5XXX-D	905-XXX	BX-8013-XXX/N	965-770-XXXN
A55485/06NXXXC			10640-3				965-770-XXXC
A55485/06PXXXD							
A55485/06PXXXN				5XXX-L	912-XXX	BX-8014-XXX/N	965-797-XXXN
A55485/06PXXXC							
043D							
043N						CX-09-020/N	
043C						CX-09-020/GP	
044D	10275D						
044N							
044C							
045D	10381D						
045N							
045C							
046D							
046N					330-072	AP-498/N	965-847-XXXN
046C							
047D			10828-2				965-845D
047N			10828-1		330-050	AP-444/N	965-845N
047C			10828-3				965-845C
048D			10406-2				965-848D
048N			10406-1		330-085		965-848N
048C			10406-3				965-848C

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-ELDN; however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.
2/ XXXX in the PIN represents the "H" dimension in figure 1 (cylindric-shaped standoffs only).
3/ Vendor commercial PIN's are given for reference only. Do not use these numbers for ordering purposes.
4/ CAGES 24227, 32559, and 54355: XXX in the PIN represents the "H" dimension.
5/ CAGE 53174: XXX in the PIN represents the "H" dimension. Nylon is standard material; other materials may be available and will be quoted on request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Vendor CAGE number	Vendor name and address
0ZK84	Micro-Dimensional Products, Incorporated 548 North Trooper Road Norristown, PA 19403-4536 (215) 630-4658
13103	Thermalloy, Incorporated 2021 West Valley View Lane Dallas, TX 75381-0839 (214) 243-4321
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
24227	Teknational Industries, Incorporated 480 Clinton Avenue South Rochester, NY 14620-1103 (716) 232-1291
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5999-0323)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.