
MILITARY SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY, (SERIES BNC, (CABLED), SOCKET CONTACT, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-39012.

MARKING IMPLEMENTATION DATE FOR CATEGORY B, SEE TABLE IV

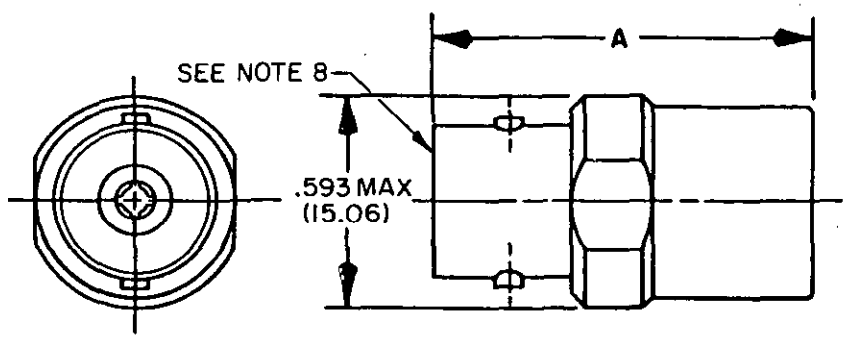

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For dimensions A, see table I and III.
4. Dimensions .593 is the largest overall diameter of the connector.
5. Wrench flats are to accommodate standard wrench opening in accordance with H-28, appendix 10.
6. All undimensioned pictorial representations are for reference purposes only.
7. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
8. Series BNC, socket contact interface in accordance with MIL-STD-348, 301.2.

FIGURE 1. General configuration.


AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions.

Dash no. 1/	Applicable cable 2/ M17/	Dimensions	Inches (millimeters) maximum
CATEGORY A - FIELD SERVICEABLE (NO SPECIAL TOOLS REQUIRED)			
0101 3/	28-RG058 84-RG223 4/ 128-RG400 60-RG142 5/	A	1.250 (31.75)
0102 3/	29-RG59 4/ 6/ 30-RG062 6/ 90-RG71 6/ 97-RG210 6/		
0103 3/	54-RG122 4/		
0111 3/	111-RG303 4/ 5/		
0118 3/	110-RG302 4/ 5/ 6/		
0220 3/	113-RG316 5/ 4/ 119-RG174		
0225 3/	74-RG213 4/		
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) 7/ SEE FOOTNOTE NEXT TO APPLICABLE CABLE FOR CRIMP DIE			
0013 3/	28-RG058 4/ 8/ 111-RG303 8/	A	1.500 (38.10)
0014 3/	84-RG223 4/ 8/ 60-RG142 8/		
0015 3/	29-RG59 4/ 6/ 9/ 30-RG062 6/ 9/ 97-RG210 6/ 9/		
0016 3/	54-RG122 4/ 10/		
0017 3/	90-RG71 4/ 6/ 9/		
0020 3/	110-RG302 4/ 5/ 6/ 9/		
0222 3/	113-RG316 4/ 11/ 119-RG174 11/		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

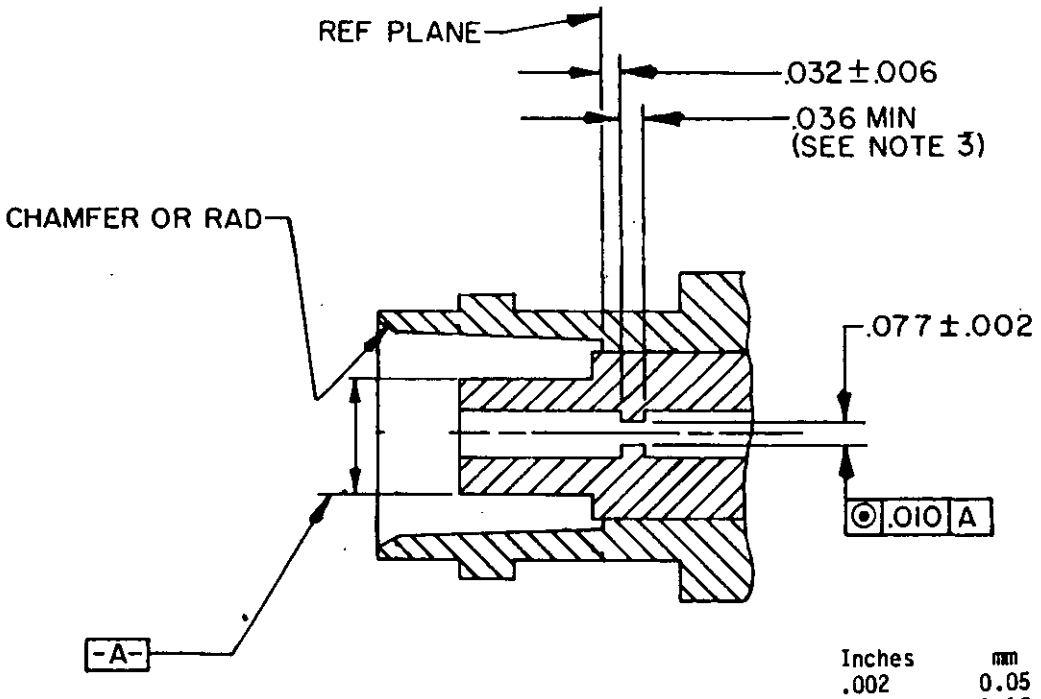

Inches	mm
.002	0.05
.006	0.15
.010	0.25
.032	0.81
.036	0.91
.077	1.96

CATEGORY D

NOTES:
1. Metric equivalents are given for general information only.
2. Concave depression .100 (2.54 mm) x .005 (0.13 mm) deep between studs permissible.
3. Chamfer is optional.
4. Dimensions are in inches.

FIGURE 2. Mating dimensions for socket terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions - Continued.

Dash no. 1/	Applicable cable 2/ M17/	Dimensions	Inches (millimeters) maximum
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS 7/ 12/ 13/			
0501 3/	54-RG122 4/	A	1.234 (31.34)
0502 3/	095-RG180 4/ 6/		
0503 3/	60-RG142 4/ 128-RG400		
0504 3/	28-RG058 4/		

1/ For cross-reference of dash number to superseded part number or type designation, see table IV.

2/ The latest version of each cable shall be applicable.

3/ These connectors have captivated center contacts.

4/ Cable to be used when performing tests requiring cable except as in 5/ and 6/.

5/ Cable to be used for the +200°C temperature cycling tests.

6/ These are not 50-ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.

7/ These connectors are assembled, using the applicable crimp tool, to the specified cables stripped as shown on figure 4.

8/ M22520/5-19 closure B — M22520/5-05 closure A; M22520/5-11 closure A; M22520/5-57 closure A

9/ M22520/5-19 closure A — M22520/5-07 closure A; M22520/5-13 closure A; M22520/5-59 closure A


10/ M22520/5-41 closure B — M22520/5-05 closure B; M22520/5-09 closure A

11/ M22520/5-35 closure B — M22520/5-03 closure A

12/ Complete connector assembly shall consist of a body, center contact, ferrule, and assembly instructions.

13/ Not to be used in Army equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

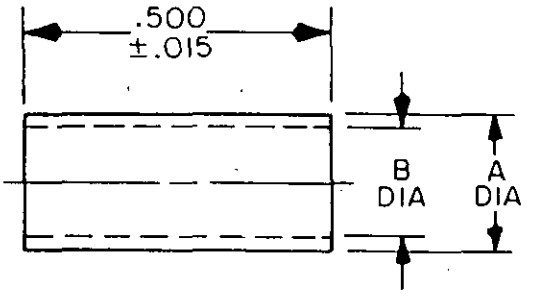


CRIMP FERRULE

Dash no.	Ferrule no. 2/	A ±.001	B ±.001	Basic crimp tool 1/ M22520/5	Crimp die or positioner M22520/5
0501 0502	17-50	0.212	0.175	-01	05, 41 Closure B or 9 Closure A
0503	17-51	0.250	0.220		5, 11, 57 Closure A or 19 Closure B
0504	17-52	0.245	0.206		

1/ Class 2 tool may be used by OEM (see MIL-C-22520).
2/ Contact numbers and ferrule numbers are for identification only.

FIGURE 3. Contact and ferrule dimensions for category D only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

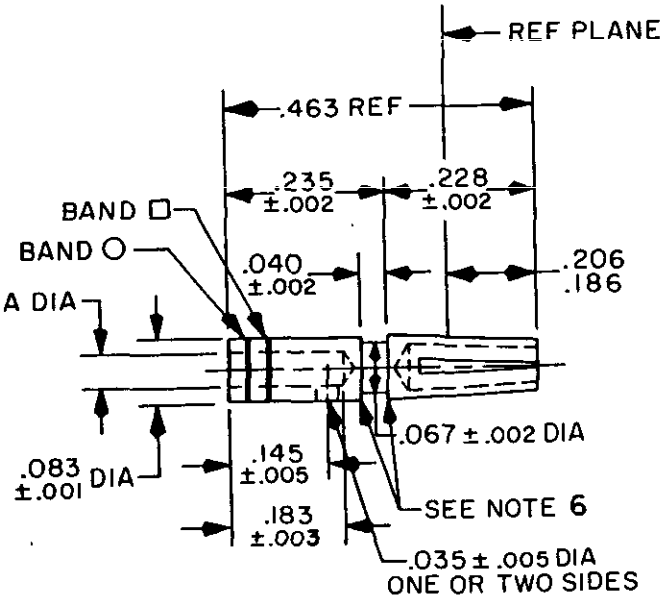

Dash no.	Contact no. 2/	A +.001 -.002	Basic crimp tool 1/	Crimp die or positioner	Crimp tensile min	Color band □	Color band ○
0501	17-12	0.033	M22520/1-01	M22520/1-12	10 lbs	Orange	
0502	17-11	0.017			6 lbs	Blue	Green
0503 0504	17-10	0.043	M22520/1-01	M22520/1-12	20 lbs	Red	


1/ Class 2 tool may be used by OEM (see MIL-C-22520).
2/ Contact numbers and ferrule numbers are for indentification only.

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.005	0.13
.015	0.38
.017	0.43
.033	0.84
.035	0.89
.040	1.02
.043	1.09
.067	1.70
.083	2.11
.145	3.68
.175	4.45
.183	4.65
.186	4.72
.206	5.23
.212	5.38
.220	5.59
.228	5.79
.235	5.97
.245	6.22
.250	6.35
.463	11.76
.500	12.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Contact material shall be phosphor bronze or copper beryllium.
4. Crimp tensile test shall be in accordance with MIL-C-39029.
5. Copyright notice: All information disclosed in these specification sheets which is or may be copyrighted is reproduced herein with the express permission of the copyright owner.
6. .003 maximum break.

FIGURE 3. Contact and ferrule dimensions for category D only - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

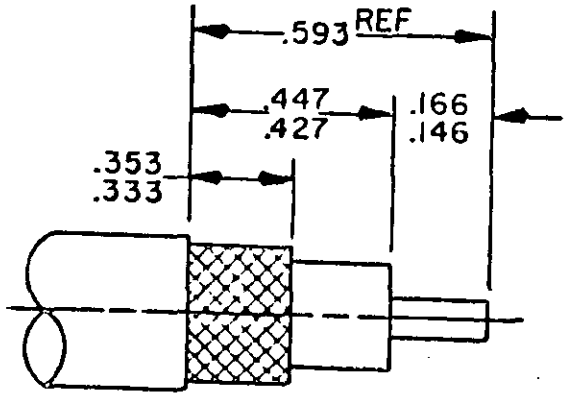

Inches	mm
.146	3.71
.166	4.22
.333	8.46
.353	8.97
.427	10.85
.447	11.35
.593	15.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Cable stripping dimensions for field replaceable connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: 50 ohms.

Frequency range: 0 to 4,000 MHz.

Voltage rating:

500 volts rms, maximum working voltage at sea level.

125 volts rms, maximum at 70,000 feet.

Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and MIL-STD-348.

Force to engage and disengage:

Longitudinal force - 3 pounds maximum.

Torque - 2-1/2 inch-pounds, maximum.

Coupling proof torque: Not applicable.

Inspection conditions: Coupling torque not applicable.

Mating characteristics:

See MIL-STD-348 and figure 2 for dimensions.

Center contact (socket):

Oversize test pin - .057 diameter minimum (nonclosed entry contacts only).

Insertion depth - .125 minimum.

Number of insertions - 1.

Insertion force test - Steel test pin diameter .054 minimum.

Test pin finish - 16 microinches.

Insertion force - 2 pounds maximum.

Withdrawal force test: Steel test pin diameter .052 maximum.

Withdrawal force - 2 ounces minimum.

Test pin finish - 16 microinches.

Hermetic seal: Not applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: Method 302 of MIL-STD-202, test condition B. 5,000 megohms minimum.

Center contact retention: 6 pounds minimum axial force. Applicable to captivated-center-contact connectors only.

Corrosion (salt spray): Method 101 of MIL-STD-202, test condition B.

Voltage standing wave ratio (VSWR): From 500 to 4,000 MHz, or approximately 80 percent of upper cutoff frequency of the cable, whichever is lower; 1.30 maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

Swept frequency VSWR test setup:

Item 6 - VSWR shall be less than 1.015 + .005 F (F in GHz).

Item 16 - VSWR shall be less than 1.015 + .005 F (F in GHz).

Second step of VSWR checkout procedure - VSWR shall be less than 1.045 + .019 F (F in GHz).

Group B inspection - VSWR shall be less than 1.1 + .01 F (F in GHz).

Qualification and group C inspection - VSWR shall not exceed 1.15.

Connector durability: 500 cycles minimum at 12 cycles/minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms maximum:

	Initial	After environment
Center contact	1.5	2.0
Outer contact	.2	Not applicable
Braid to body	.1	Not applicable

Dielectric withstanding voltage: Method 301 of MIL-STD-202. 1,500 volts rms minimum at sea level.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B. No discontinuity permitted.

Shock: Method 213 of MIL-STD-202, test condition G. No discontinuity permitted.

Thermal shock : Method 107 of MIL-STD-202, test condition B, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cables (see table I and III).

Moisture resistance: Method 106 of MIL-STD-202. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level:

Voltage - 375 volts rms, minimum.

Altitude - 70,000 feet.

RF high potential withstanding voltage:

Voltage and frequency: 1,000 volts rms at a frequency from 5 to 7.5 MHz.

Leakage current: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

Cable retention force:

Noncrimp assemblies: 40 pounds minimum.

Crimp assemblies:

10 pounds minimum for cables .155-.189 OD.

20 pounds minimum for cables .190-.229 OD.

30 pounds minimum for cables .230-.249 OD.

40 pounds minimum for cables .250 OD and larger.

Coupling mechanism retention force: Not applicable.

RF leakage: -55 dB minimum, tested at a frequency between 2 and 3 GHz.

Insertion loss: .2 dB maximum tested at 3 GHz.

Part number: M39012/17- (dash number from table I or "B" number from table III).

TABLE II. Group Qualification.

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
	M39012/	M39012/
I	17-0101	17-0101
	17-0103	17-0102
	17-0111	17-0103
	17-0118	17-0111
	18-0102	17-0118
	18-0103	18-0101
	18-0111	18-0102
	18-0118	18-0103
	19-0101	18-0111
	19-0110	18-0118
	19-0111	19-0101
	19-0118	19-0102
		19-0110
		19-0111
		19-0118
II	17-0102	17-0102
	18-0101	18-0101
	19-0102	19-0102
III	17B0004	17B0004
	17B0005	17B0005
	17B0006	17B0006
	17B0007	17B0007
	17B0009	17B0008
	17B0019	17B0009
	18B0004	17B0012
	18B0005	17B0019
	18B0006	18B0004
	18B0007	18B0005
	18B0009	18B0006
	18B0019	18B0007
	19B0003	18B0008
	19B0004	18B0009
	19B0005	18B0012
	19B0006	18B0019

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

TABLE II. Group Qualification - Continued.

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
III	M39012/ 19B0008 19B0019	M39012/ 19B0003 19B0004 19B0005 19B0006 19B0007 19B0008 19B0012 19B0019
IV	17B0008 17B0012 18B0008 18B0012 19B0007 19B0012	17B0008 17B0012 18B0008 18B0012 19B0007 19B0012
V	17-0013 17-0014 17-0016 17-0020 18-0013 18-0014 18-0016 18-0020 19-0013 19-0014 19-0016 19-0020	17-0013 17-0014 17-0015 17-0016 17-0017 17-0020 18-0013 18-0014 18-0015 18-0016 18-0017 18-0020 19-0013 19-0014 19-0015 19-0016 19-0017 19-0020
VI	17-0015 17-0017 18-0015 18-0017 19-0015 19-0017	17-0015 17-0017 18-0015 18-0017 19-0015 19-0017
VII	17-0501 17-0503 17-0504	17-0501 17-0502 17-0503 17-0504
VIII	17-0502	17-0502

NOTE: If a connector manufacturer produces a connector which meets all the requirements for two or more connector part numbers (within the same series), the manufacturer may receive qualification approval for two or more connector part numbers qualifying the one connector. It is not necessary that such connectors be in the same group. Each connector, however, must be marked with its own appropriate part number. For group qualification, the connectors must be of similar design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

TABLE III. CATEGORY B - NONFIELD REPLACEABLE (SPECIAL TOOLS MAY BE REQUIRED). 1/

NOT FOR AIR FORCE OR NAVY USE. FOR OEM USE ONLY.

Part no. 2/3/ M39012/17B	Applicable cable 4/ M17/	Dimensions	Inches (millimeters) maximum
0004	28-RG058 5/	A	1.500 (38.10)
0005	84-RG223 5/		
0006	111-RG303 5/		
0007	60-RG142 5/ 6/		
0008	29-RG59 5/ 6/ 30-RG062 6/ 97-RG210 6/		
0009	54-RG122 5/		
0012	90-RG71 5/ 6/		
0019	110-RG302 5/6/7/		
0221	113-RG316 5/7/ 119-RG174		

1/ For maintenance replacements for category B, see table V.

2/ For cross-reference of part number to superseded part number or type designation, see table IV.

3/ Inactive for new design.

4/ The latest version of each cable shall be applicable.

5/ Cable to be used when performing tests requiring cable except as in 6/ and 7/.

6/ These are not 50-ohm cables, therefore, when attached to the specified connectors, VSWR, RF leakage and insertion loss are not applicable.

7/ Cable to be used for the +200°C thermal shock tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

TABLE IV. Cross-reference of part numbers. 1/

Preferred part number M39012/17	Substitute for part number or type designation 2/ 3/
-0101	UG-89/U, M39012/17-0001
-0102	UG-261/U, M39012/17-0002
-0103	UG-1056/U, M39012/17-0003
B0004	M23329/3-08, M38012/17-0004
B0005	M23329/3-09, M39012/17-0005
B0006	M23329/3-10, M39012/17-0006
B0007	M23329/3-11, M39012/17-0007
B0008	M23329/3-12, M39012/17-0008
B0009	M23329/3-13, M39012/17-0009
-0111	M39012/17-0001
B0012	M39012/17-0012
-0013	
-0014	
-0015	
-0016	
-0017	
-0118	
B0019	M39012/17-0019
-0020	
-0501	
-0502	
-0503	
-0504	
B0221	M39012/17-0221

1/ The new "B" part numbers will be required marking 6 months after the date of this specification. The connectors that are in stock or distribution that were previously qualified and marked with the old part number shall also be considered acceptable for Government use until connector stock is purged.

2/ The superseded part number or the type designation is for cross-reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M39012/17-XXXX shall be used in all cases for marking and identifying the connector.

3/ The basic type designation includes all letter versions of the specificed number, e.g. UG-18/U includes UG-18 A/U, UG-18B/U, etc.

TABLE V. Maintenance replacements for category B.

Category B no. 1/	Category C dash no.	Category A dash no.	Category D dash no.
B0004	0013	0101	0504
B0005	0014	0101	---
B0006	0013	0111	---
B0007	0014	0101	0503
B0008	0015	0102	---
B0009	0016	0103	0501
B0012	0017	0102	---
B0019	0020	0118	---
B0221	0222	0220	---

1/ Category B connectors are for original installation only. They will not be stocked or acquired by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - EA, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3599-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:44Z
Check the source to verify that this is the current version before use.