INCH-POUND

MIL-PRF-39012/25F
w/AMENDMENT 2
30 November 2022
SUPERSEDING
MIL-PRF-39012/25F
w/AMENDMENT 1
28 August 2017

DETAIL SPECIFICATION SHEET

COVER, PLUG AND RECEPTACLE, CONNECTORS, COAXIAL, RADIO FREQUENCY (HARDWARE FOR RADIO FREQUENCY COAXIAL CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39012.


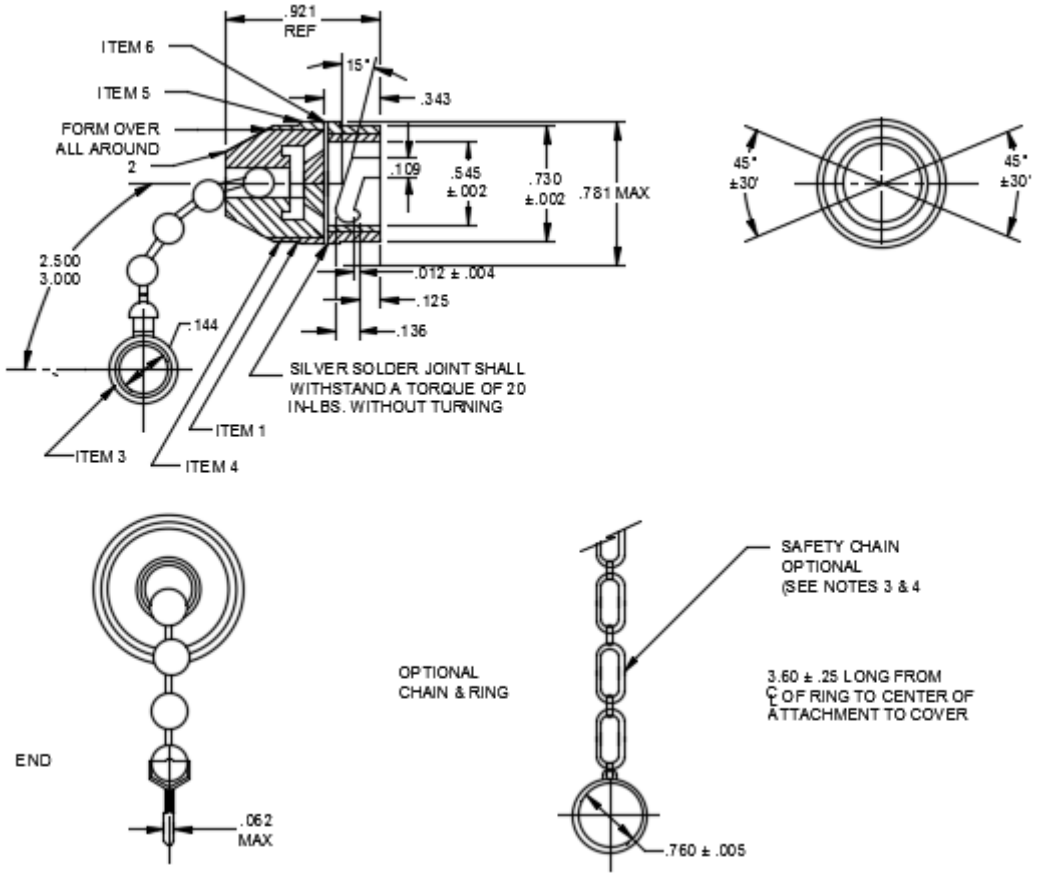


FIGURE 1. M39012/25-X001 cover for series C female connectors with bead chain.
M39012/25-X002 cover for series C female connectors with safety chain.
M39012/25-X101 cover for series C female connectors with wire rope.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

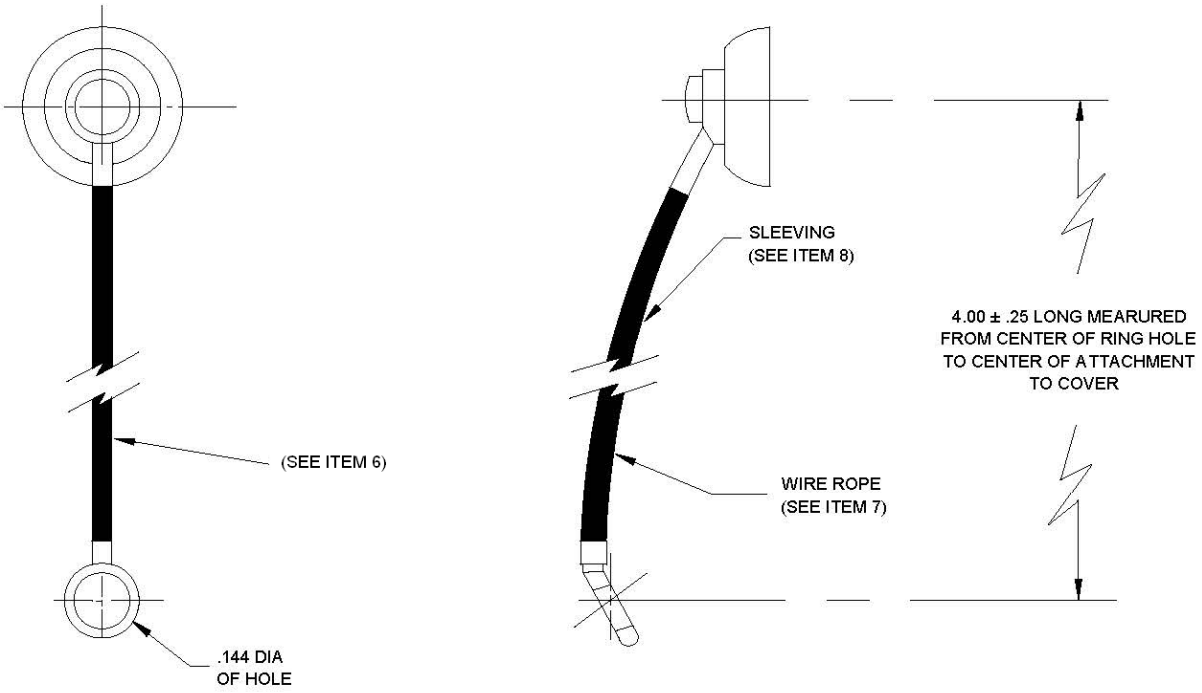

Item	Material	Description
1	Silicon rubber	Gasket
2	Brass	Disc
3	Steel	Chain assembly
4	Silicone rubber	V-groove gasket
5	Brass	Coupling sleeve
6	Brass	Bayonet sleeve
7	SST	Wire rope
8	Teflon or nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
3. Safety chain: (Optional) passivated corrosion resistant steel in accordance with MIL-PRF-39012.
4. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
5. Bayonets of connector shall lock in bottom slot and shall maintain the connector interface free of dust and moisture.
6. The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.

FIGURE 1. M39012/25-X001 cover for series C female connectors with bead chain.
M39012/25-X002 cover for series C female connectors with safety chain.
M39012/25-X101 cover for series C female connectors with wire rope - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

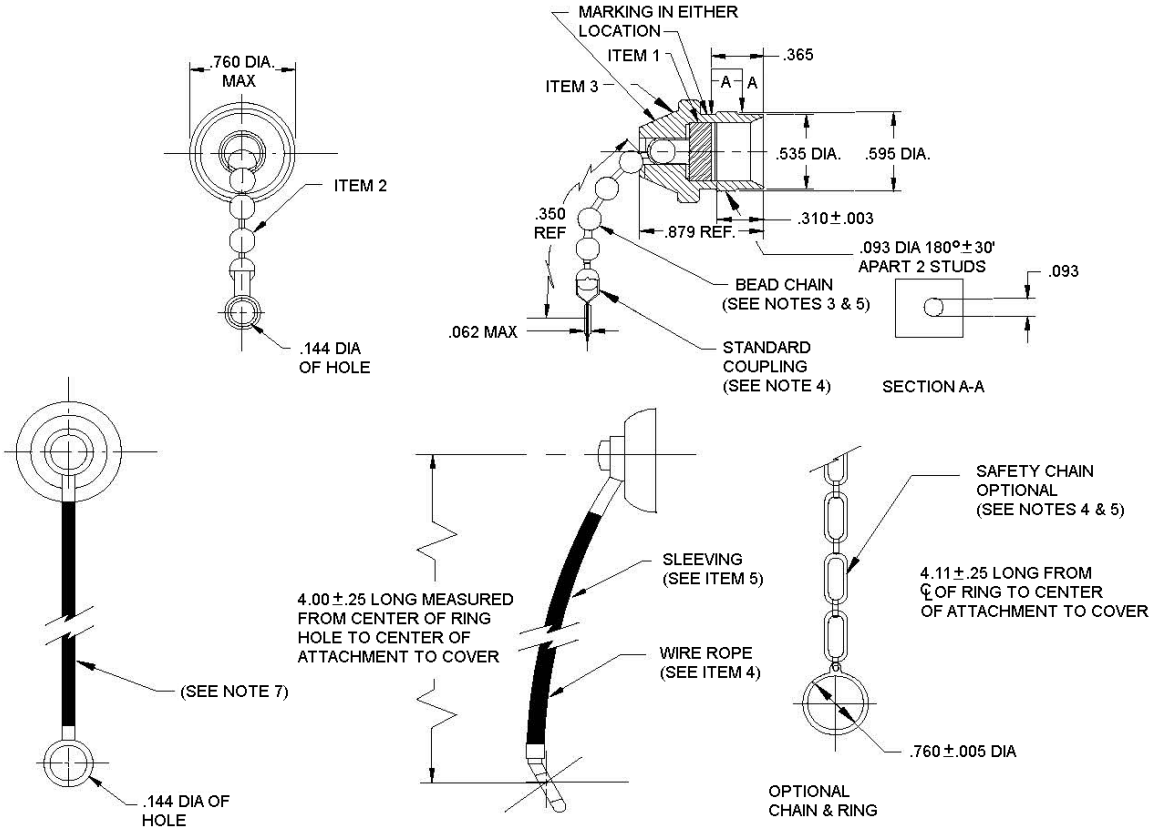


FIGURE 2. M39012/25-X003 cover for series C male connectors with bead chain.
M39012/25-X004 cover for series C male connectors with safety chain.
M39012/25-X103 cover for series C male connectors with wire rope.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Silicone rubber	Gasket
2	Steel	Chain assembly
3	Brass	Body
4	SST	Wire rope
5	Teflon or nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
3. Standard coupling brass, bead chain monel metal or stainless steel, and sleeve.
4. Safety chain: (Optional) passivated corrosion resistant steel in accordance with MIL-PRF-39012.
5. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
6. Bayonets of connector shall lock in bottom slot and shall maintain the connector interface free of dust and moisture.
7. The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.

FIGURE 2. M39012/25-X003 cover for series C male connectors with bead chain.
M39012/25-X004 cover for series C male connectors with safety chain.
M39012/25-X103 cover for series C male connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

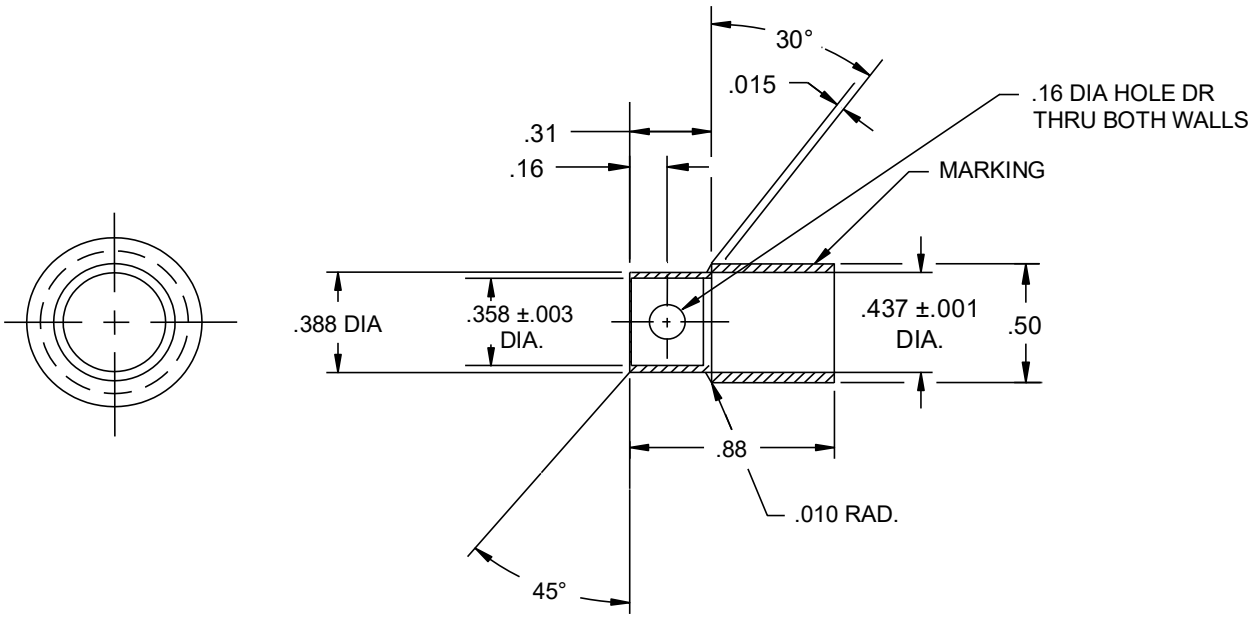

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals, ±.005 inch (0.13 mm) for three place decimals, and ± 30’ on angles.
3. The material shall be brass. Silver plate shall be in accordance with MIL-PRF-39012, .0001 inch (0.003 mm) thick minimum.

FIGURE 3. M39012/25-0005 shield (Silver plated connectors only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

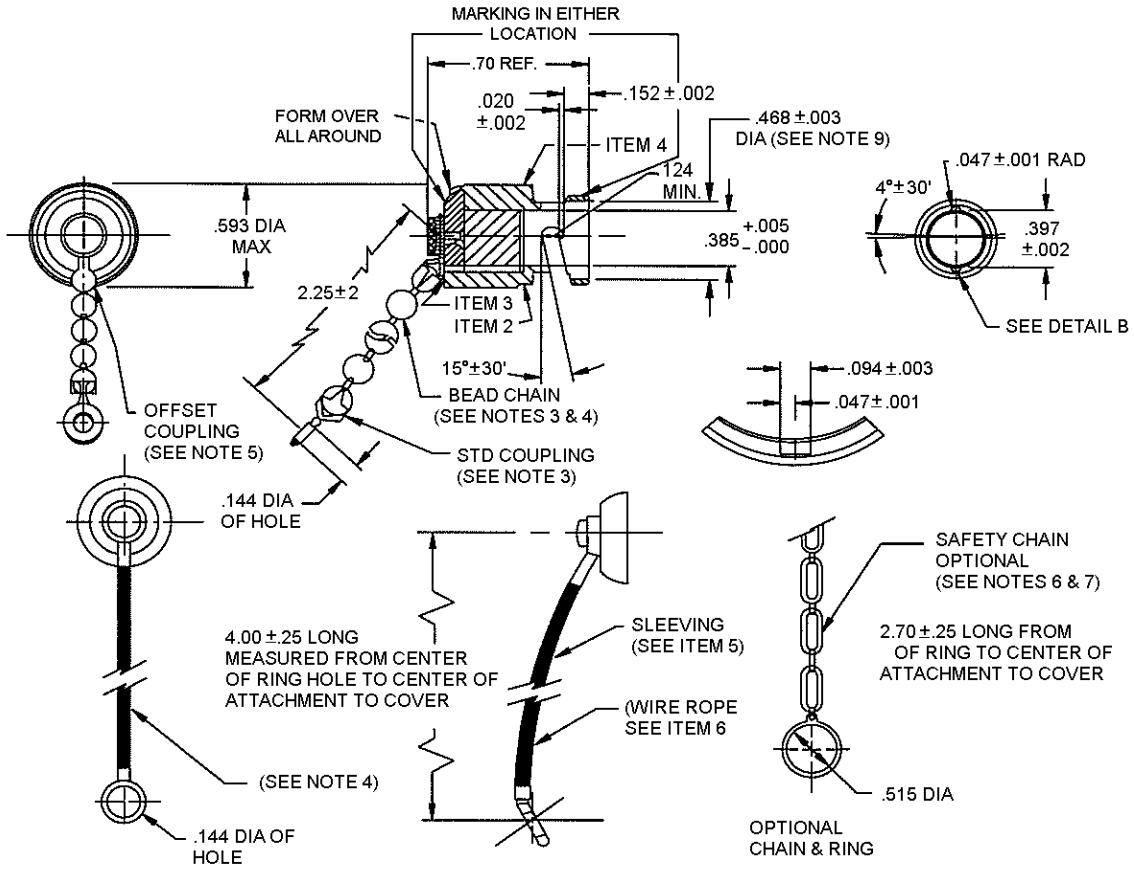


FIGURE 4. M39012/25-X006 cover for series BNC female connectors with bead chain.
M39012/25-X007 cover for series BNC female connectors with safety chain.
M39012/25-X106 cover for series BNC female connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Brass	Rivet
2	Silicone rubber	Pad
3	Brass	Disc, body
4	Brass	Sleeve
5	SST	Wire rope
6	Teflon, nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling, brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Bayonets of connector shall lock in bottom slot and shall maintain the connector interface free of dust and moisture.
9. For alternate construction only.

FIGURE 4. M39012/25-X006 cover for series BNC female connectors with bead chain.
M39012/25-X007 cover for series BNC female connectors with safety chain.
M39012/25-X106 cover for series BNC female connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

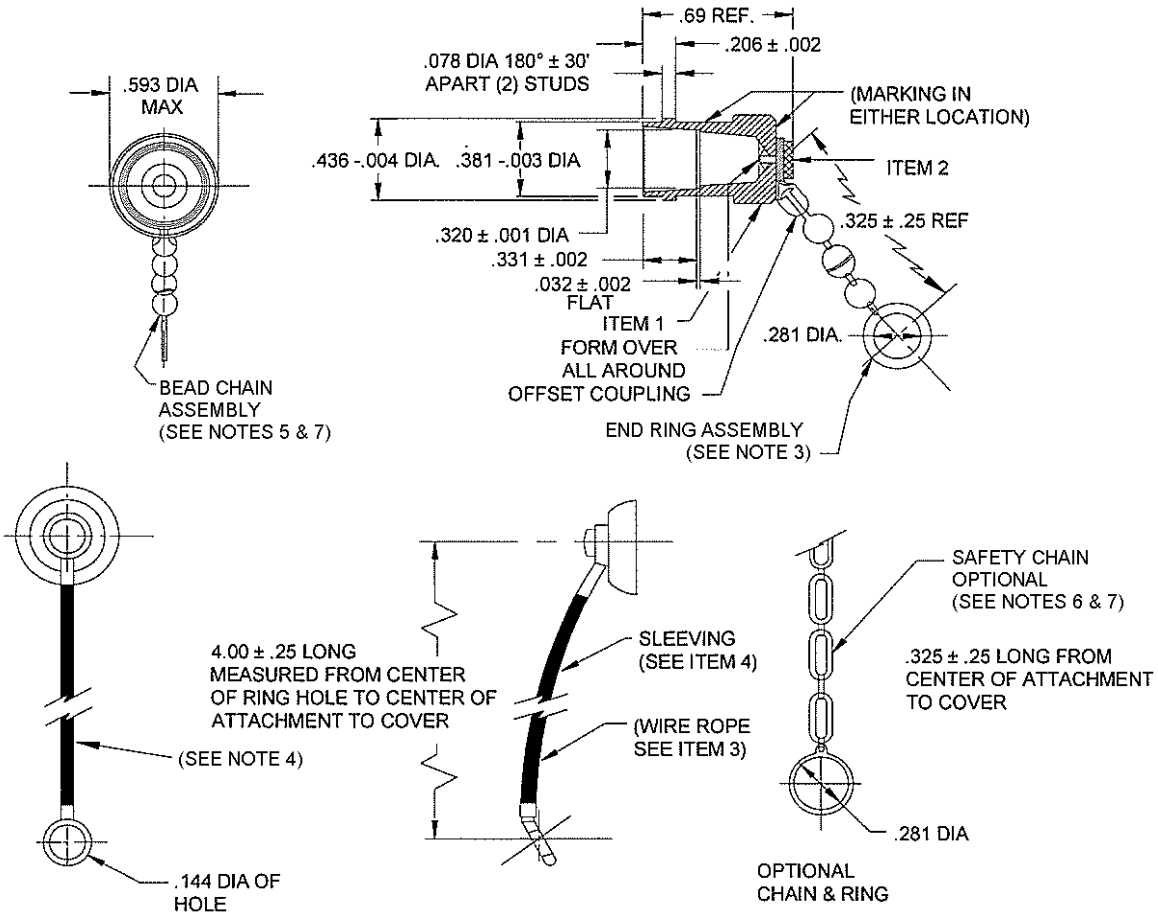


FIGURE 5. M39012/25-X008 cover for series BNC male connectors with bead chain.
M39012/25-X009 cover for series BNC male connectors with safety chain.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Brass	Body
2	Brass	Rivet
3	SST	Wire rope
4	Teflon, nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .02 inch (0.5 mm) for two place decimals and ± .005 Inch (0.13 mm) for three place decimals.
3. End ring assembly brass, bead chain monel metal or stainless steel, and offset coupling, brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Bayonets of connector shall lock in bottom slot and shall maintain the connector interface free of dust and moisture.

FIGURE 5. M39012/25-X008 cover for series BNC male connectors with bead chain.
M39012/25-X009 cover for series BNC male connectors with safety chain – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

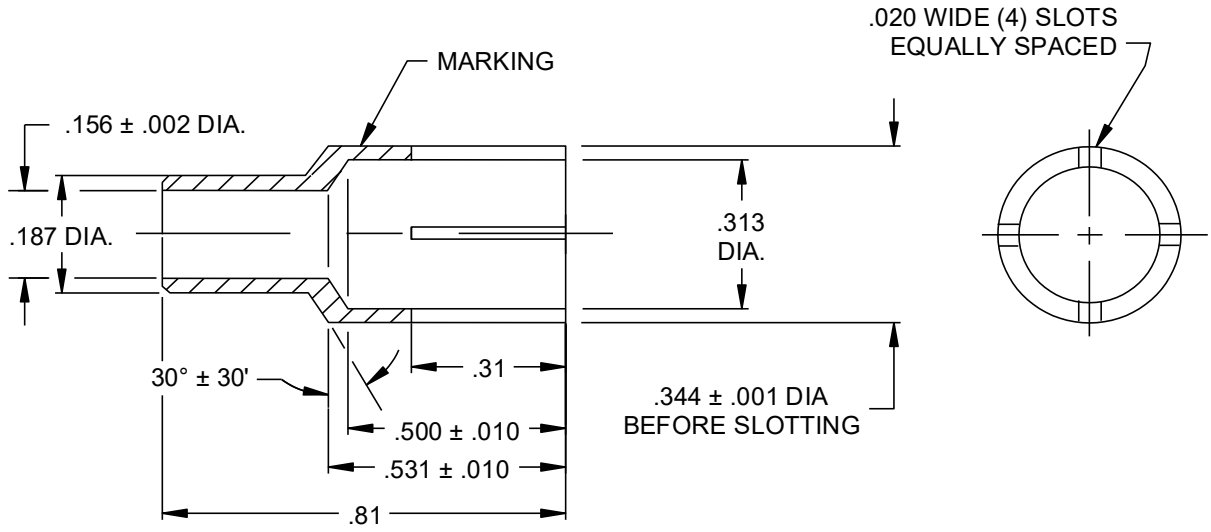

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .02 inch (0.5 mm) for two place decimals, ± .005 inch (0.13 mm) for three place decimals and ± 30’ on angles.
3. The material shall be brass. Silver plating shall be in accordance with MIL-PRF-39012, .0001 inch (0.003 mm) thick, minimum.

FIGURE 6. M39012/25-0010 shield for series BNC receptacles (Silver plated connectors only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

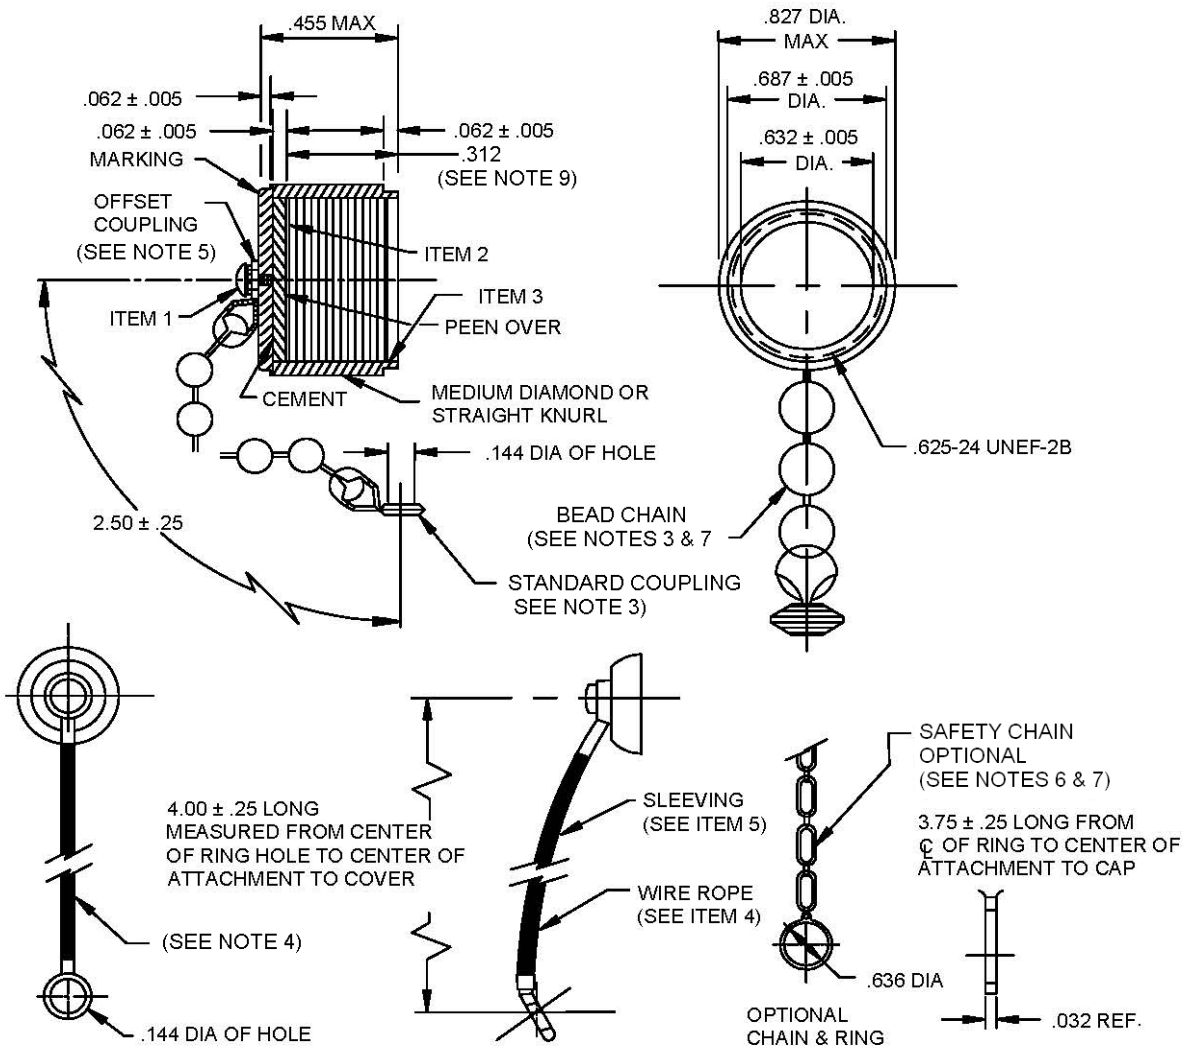


FIGURE 7. M39012/25-X011 cap and chain for series N female connectors with bead chain. M39012/25-X012 cap and chain for series N female connectors with safety chain. M39012/25-X111 cap and chain for series N female connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Brass	Rivet
2	Silicone rubber	Gasket
3	Brass	Cap
4	SST	Wire rope
5	Clear Teflon, nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .005 inch (0.13 mm).
3. Standard coupling brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.
9. This dimension is to the end of cap threads.

FIGURE 7. M39012/25-X011 cap and chain for series N female connectors with bead chain.
M39012/25-X012 cap and chain for series N female connectors with safety chain.
M39012/25-X111 cap and chain for series N female connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.


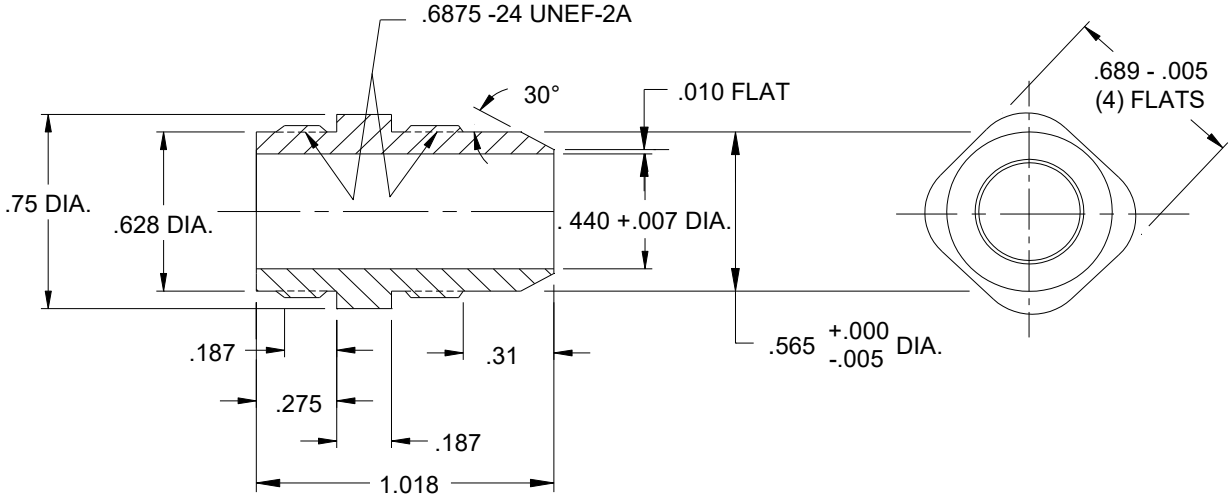


FIGURE 8. M39012/25-0013 armor clamp for M17/74-RG215 and M17/6-RG12 cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

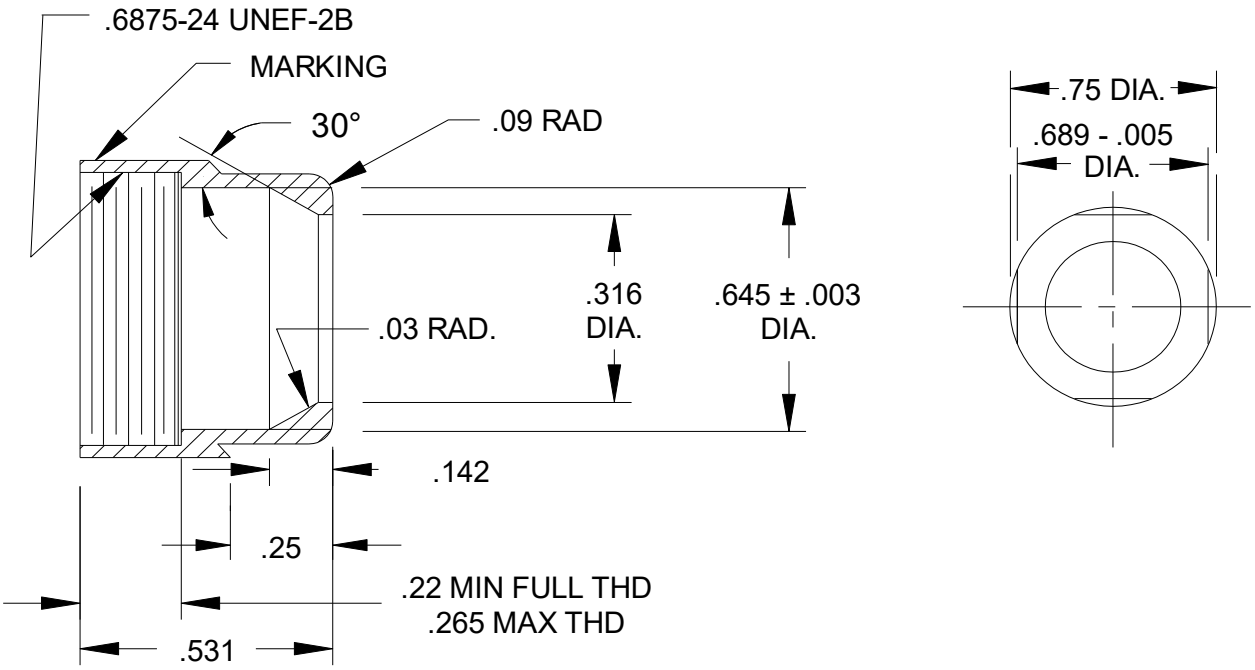

Silver plated connectors only

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .02 inch (0.5 mm) for two place decimals, ± .005 inch (0.13 mm) for three place decimals and ± 30’ on angles.
3. The material shall be brass. Silver plating shall be in accordance with MIL-PRF-39012, .0001 inch (0.003 mm) thick, minimum.

FIGURE 8. M39012/25-0013 armor clamp for M17/74-RG215 and M17/6-RG12 cable – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.


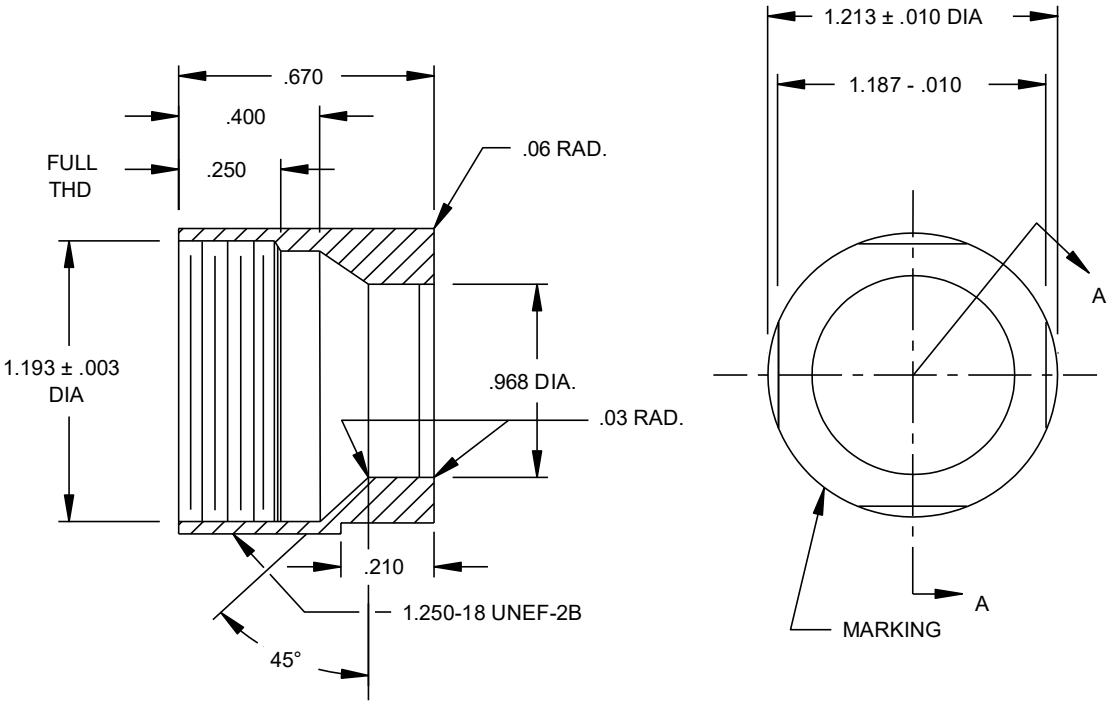


FIGURE 9. M39012/25-0014 armor clamp for M17/79-RG219 cable for silver plated connectors only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

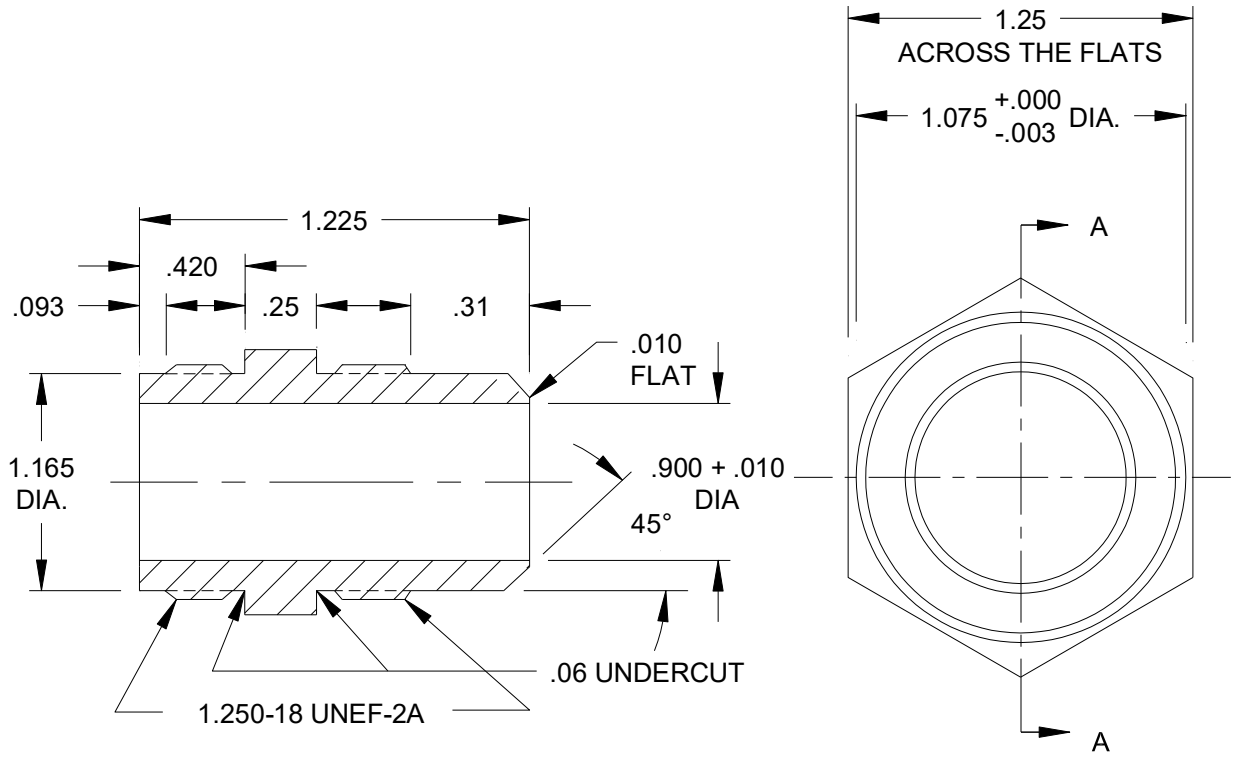


NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .02 inch (0.5 mm) for two place decimals, ± .005 inch (0.13 mm) for three place decimals and ± 30’ on angles.
3. The material shall be brass. Silver plating shall be in accordance with MIL-PRF-39012, .0001 inch (0.003 mm) thick, minimum.

FIGURE 9. M39012/25-0014 armor clamp for M17/79-RG219 cable for silver plated connectors only – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

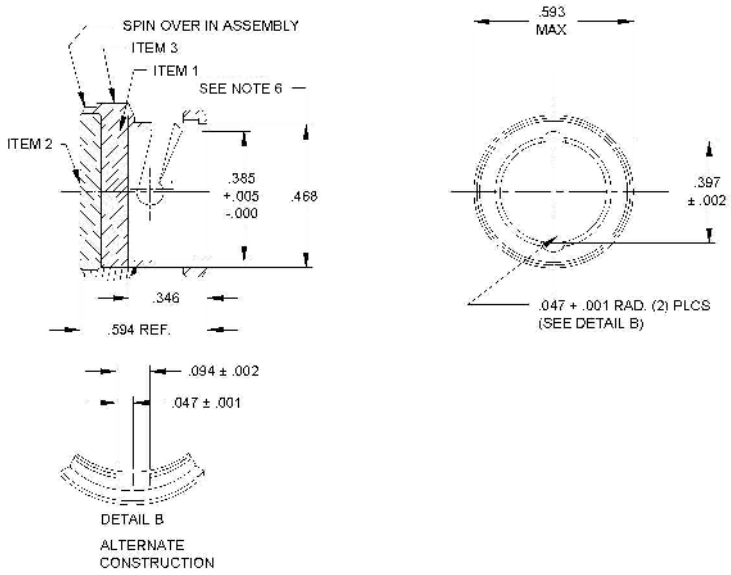

Item	Material	Description
1	Silicone rubber	Gasket
2	Brass	Disc
3	Brass	Sleeve

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .02 inch (0.5 mm) for two place decimals, ± .005 inch (0.13 mm) for three place decimals and ± 30’ on angles.
3. Bayonets of connector shall lock in bottom slot and shall maintain the connector interface free from dust and moisture.
4. Marking shall be on any visible surface.
5. All undimensioned configurations are for reference only.
6. Alternate construction only.

FIGURE 10. M39012/25-X015 cap for series BNC female connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.


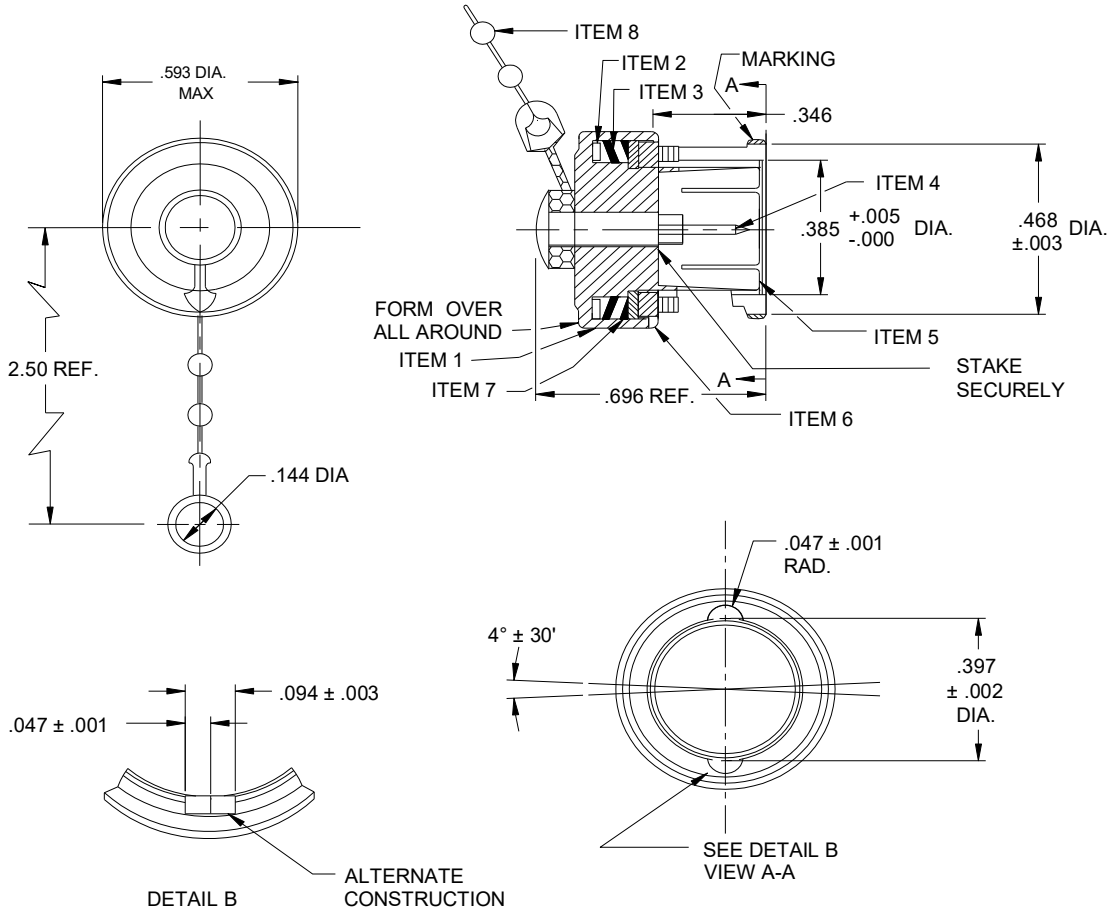


FIGURE 11. M39012/25-X016 shorting plug for series BNC female connectors with bead chain. M39012/25-X017 shorting plug for series BNC female connectors with safety chain. M39012/25-X116 shorting plug for series BNC female connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

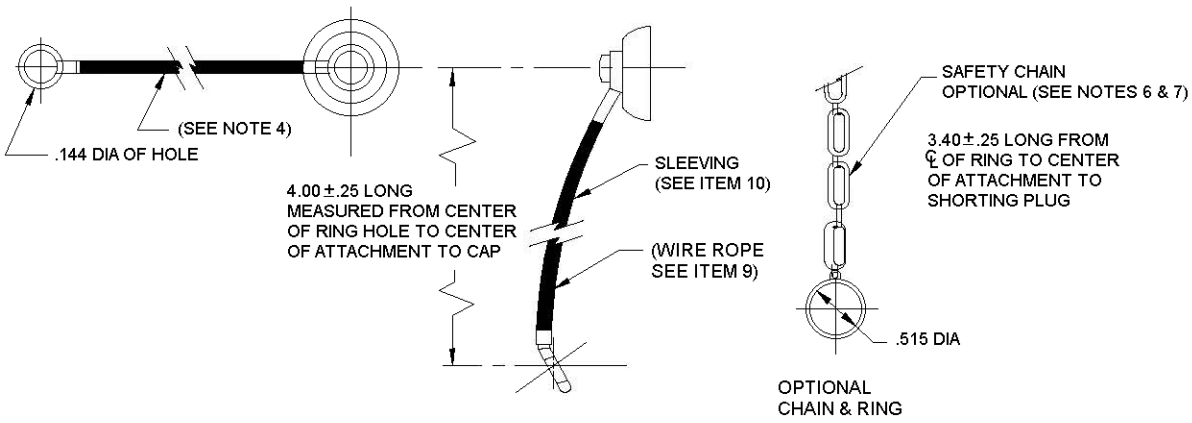

Item	Material	Description
1	Brass	Sleeve
2	Copper beryllium	Washer
3	Brass	Spring
4	Brass	Contact pin
5	Silicone rubber	Body
6	Brass	Gasket
7	Notes 5 and 8	Washer
8	SST	Beaded chain
9	Teflon or nylon or equivalent	Wire rope
10		Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.

FIGURE 11. M39012/25-X016 shorting plug for series BNC female connectors with bead chain.
M39012/25-X017 shorting plug for series BNC female connectors with safety chain.
M39012/25-X116 shorting plug for series BNC female connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

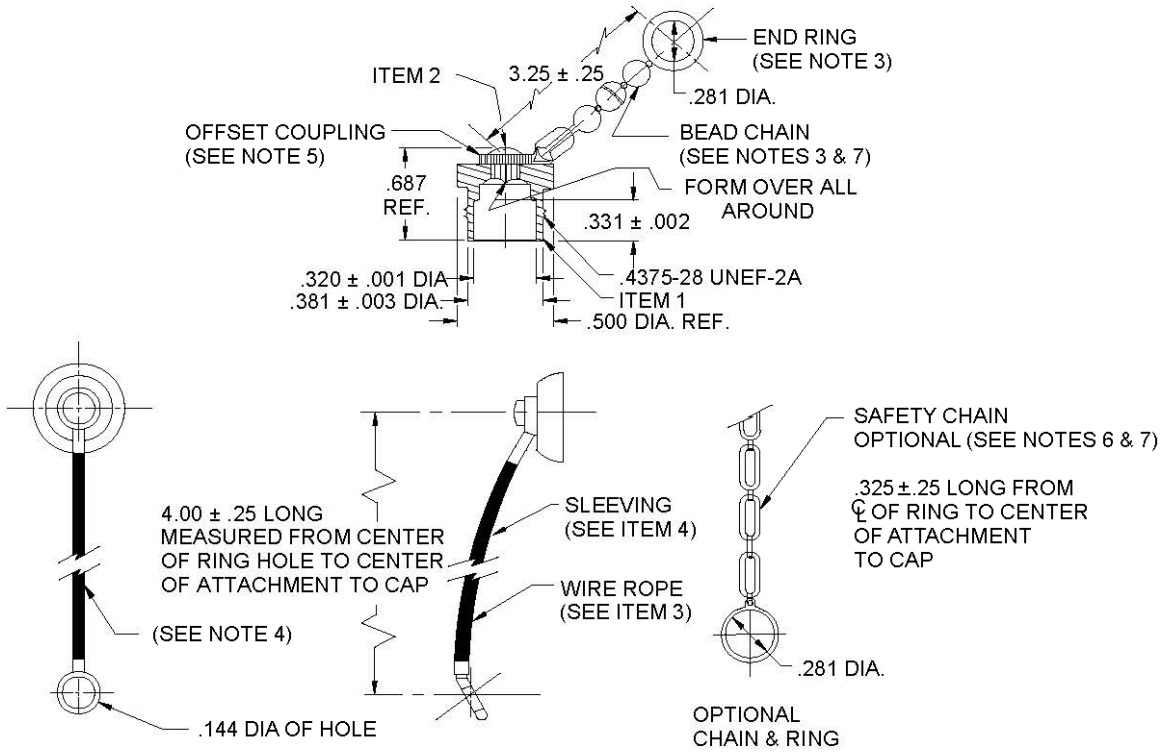


FIGURE 12. M39012/25-X018 cap and chain for series TNC male connectors with bead chain.
M39012/25-X019 cap and chain for series TNC male connectors with safety chain.
M39012/25-X118 cap and chain for series TNC male connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Brass	Body
2	Brass	Rivet
3	SST	Wire rope
4	Teflon or nylon	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling, brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.

FIGURE 12. M39012/25-X018 cap and chain for series TNC male connectors with bead chain. M39012/25-X019 cap and chain for series TNC male connectors with safety chain. M39012/25-X118 cap and chain for series TNC male connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

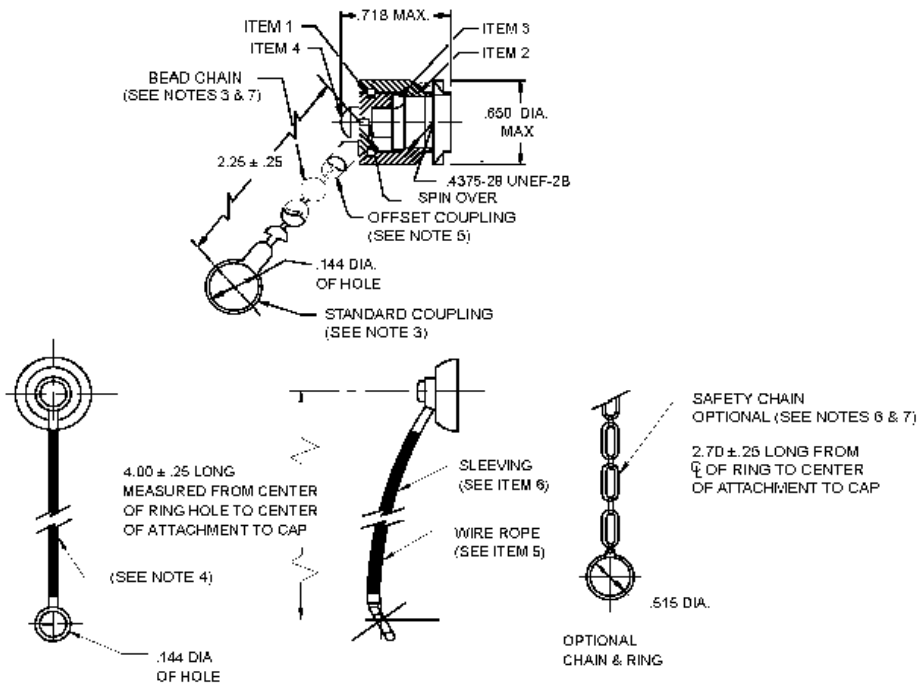


FIGURE 13. M39012/25-X020 cap and chain for series TNC female connectors with bead chain. M39012/25-X021 cap and chain for series TNC female connectors with safety chain. M39012/25-X120 cap and chain for series TNC female connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Brass	Body
2	Brass	Coupling nut
3	Silicone rubber	Gasket
4	Brass	Rivet
5	SST	Wire rope
6	Teflon or nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling, brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.
9. All undimensioned configurations are for reference only.

FIGURE 13. M39012/25-X020 cap and chain for series TNC female connectors with bead chain. M39012/25-X021 cap and chain for series TNC female connectors with safety chain. M39012/25-X120 cap and chain for series TNC female connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

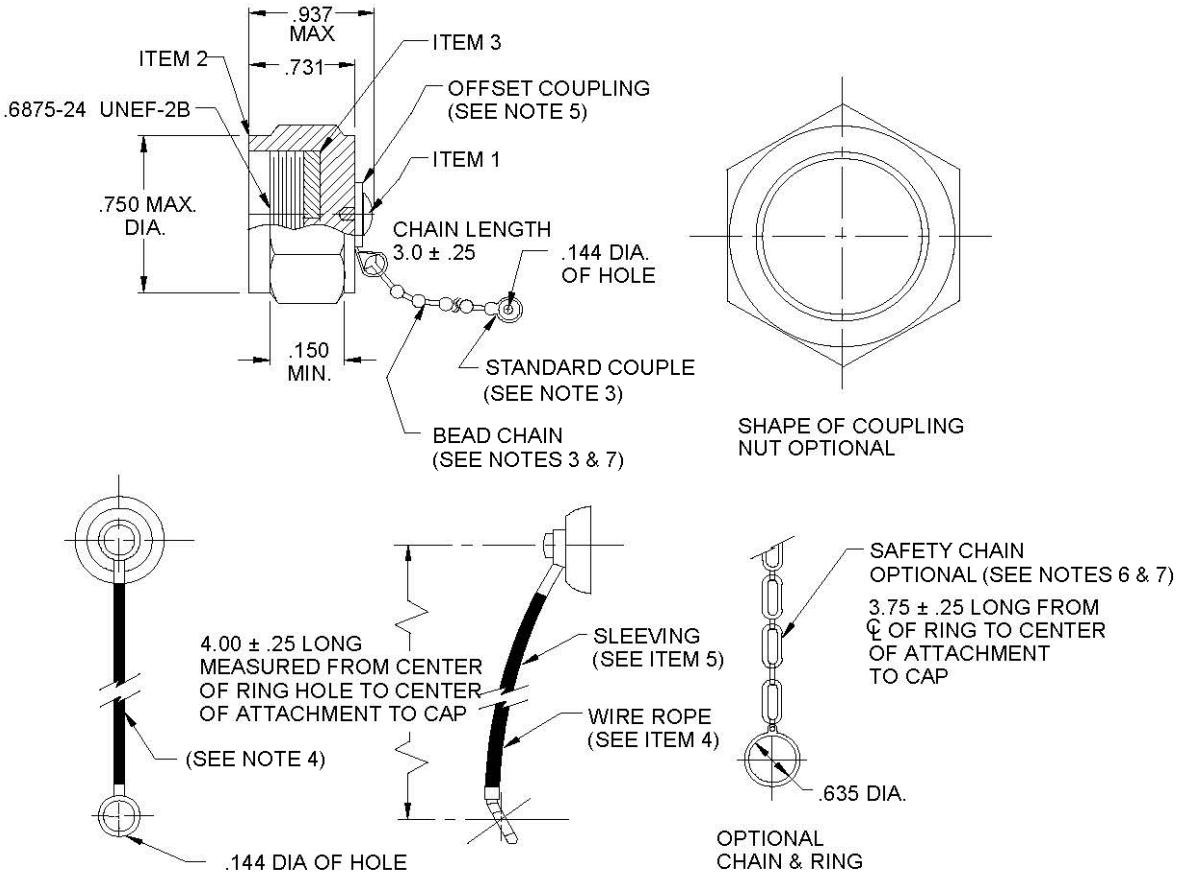


FIGURE 14. M39012/25-X022 cap and chain for series SC female connectors with bead chain.
M39012/25-X023 cap and chain for series SC female connectors with safety chain.
M39012/25-X122 cap and chain for series SC female connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Brass	Rivet
2	Brass	Cap
3	Silicone rubber	Gasket
4	SST	Wire rope
5	Teflon or nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling, brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.

FIGURE 14. M39012/25-X022 cap and chain for series SC female connectors with bead chain. M39012/25-X023 cap and chain for series SC female connectors with safety chain. M39012/25-X122 cap and chain for series SC female connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

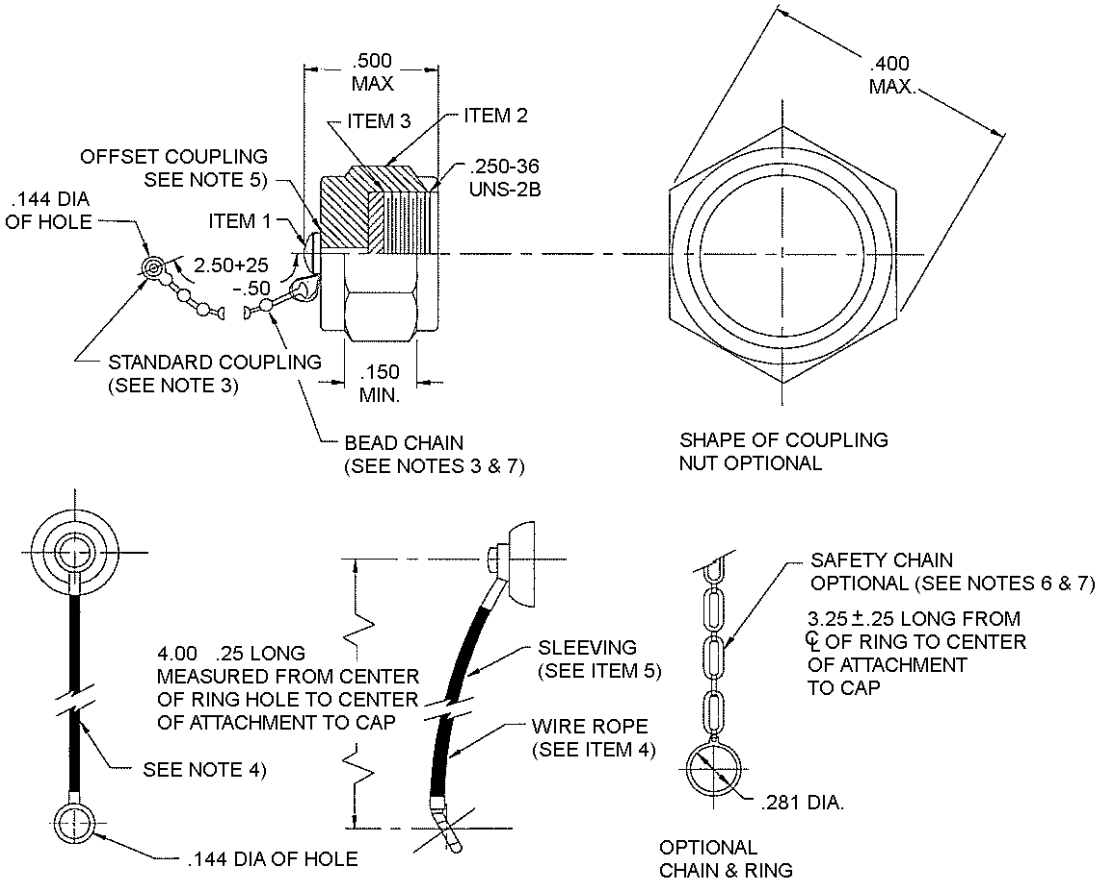


FIGURE 15. M39012/25-3024 cap and chain for series SMA female connectors with bead chain.
M39012/25-3025 cap and chain for series SMA female connectors with safety chain.
M39012/25-3124 cap and chain for series SMA female connectors with wire rope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Stainless steel	Rivet
2	Stainless steel	Cap
3	Silicone rubber	Gasket
4	SST	Wire rope
5	Teflon, nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling, brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.
9. Thread dimensions shall be in accordance with MIL-STD-348 for the SMA interface with pin contact, except the minimum dimension from the face of the cap to the beginning of the thread may be zero inches.
10. The hex flat dimensions shall be in accordance with MIL-STD-348 for the SMA interface with pin contact.

FIGURE 15. M39012/25-3024 cap and chain for series SMA female connectors with bead chain. M39012/25-3025 cap and chain for series SMA female connectors with safety chain. M39012/25-3124 cap and chain for series SMA female connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

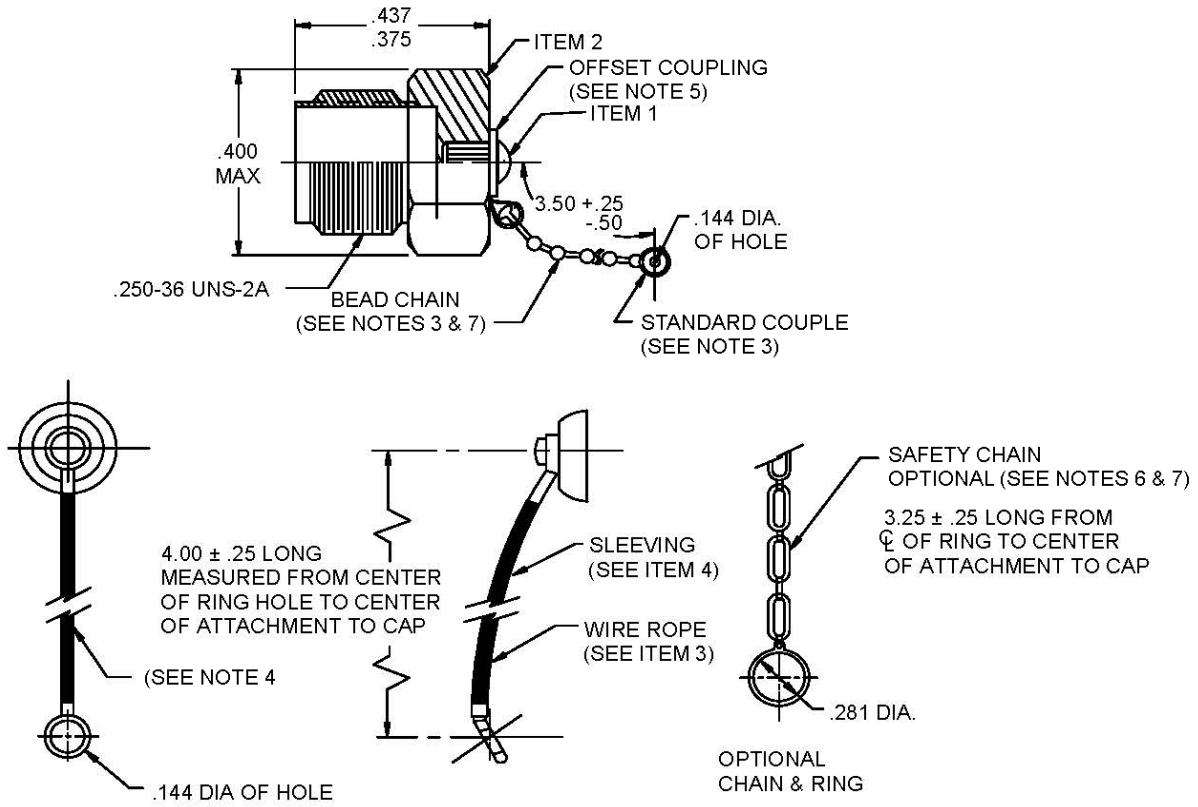


FIGURE 16. M39012/25-3026 or -4026 cap and chain for series SMA male connectors with bead chain. M39012/25-3027 or -4027 cap and chain for series SMA male connectors with safety chain. M39012/25-3126 or -4126 cap and chain for series SMA male connectors with wire rope.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

Item	Material	Description
1	Stainless steel	Rivet
2	Stainless steel	Body
3	SST	Wire rope
4	Teflon, nylon or equivalent	Covering

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals.
3. Standard coupling brass, bead chain monel metal or stainless steel, and offset coupling brass.
4. The bead chain to be finished with nickel plate, in-lieu-of silver, conforming to MIL-PRF-39012. (Exception: Parts which are fabricated with monel metal or stainless steel are not required to be plated, provided such parts will pass the corrosion test as specified in MIL-PRF-39012.). The wire rope shall be specified in MIL-DTL-83420, type 2, composition B.
5. The offset coupling must rotate freely after riveting.
6. Safety chain: (Optional) passivated corrosion resistant steel, in accordance with MIL-PRF-39012.
7. The chain shall withstand a tensile force as specified. The force shall be applied at a rate of approximately 100 pounds per minute. The applied force shall be 30 pounds for bead chain and 75 pounds for safety chain. The force shall be attached to the hole in the standard coupling.
8. Caps shall maintain connector interface free from dust and moisture.

FIGURE 16. M39012/25-3026 or -4026 cap and chain for series SMA male connectors with bead chain. M39012/25-3027 or -4027 cap and chain for series SMA male connectors with safety chain. M39012/25-3126 or -4126 cap and chain for series SMA male connectors with wire rope – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

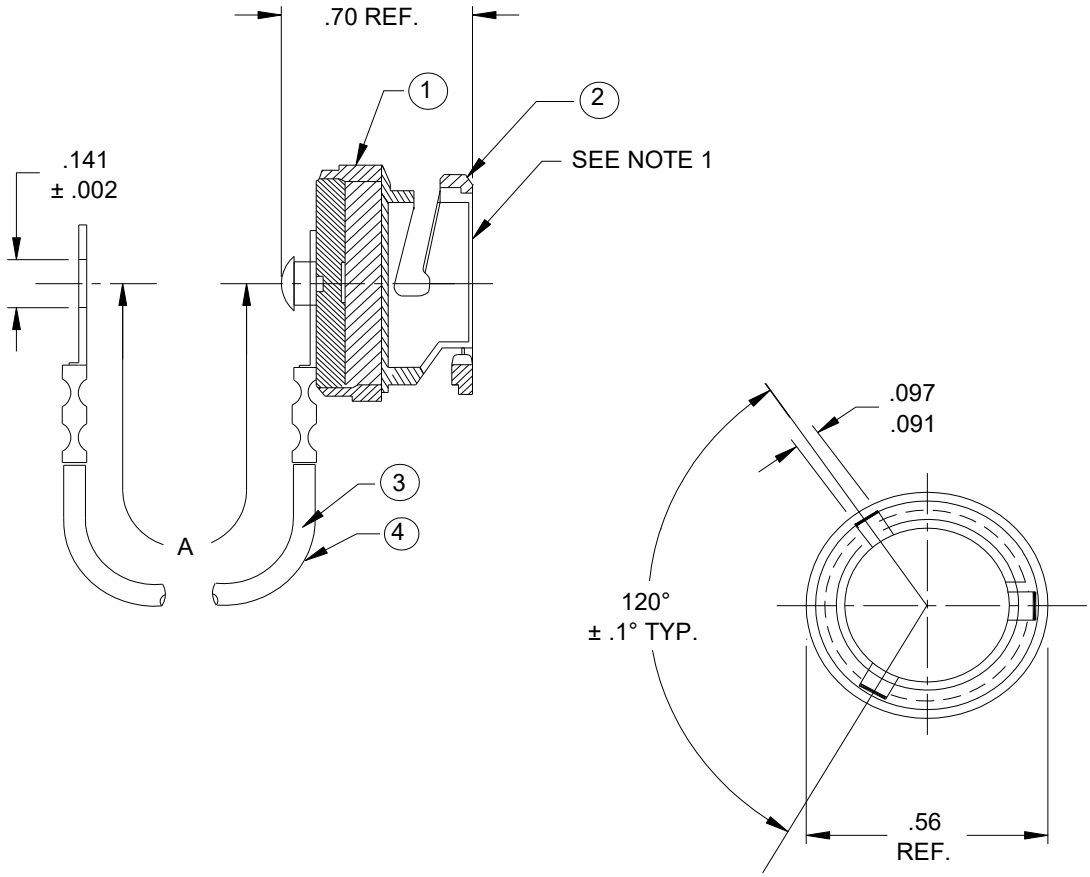


Item	Material	Description
1	Silicone	Gasket
2	Brass	Cap
3	SST	Wire rope
4	Teflon, nylon or equivalent	Rope insulation

NOTES:

1. Cap shall mate with series TRB in accordance with MIL-PRF-49142.
2. Dimension A: 4 ±.25 inches.
3. Dimensions are in inches.

FIGURE 17. M39012/25-X028 series TRB cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

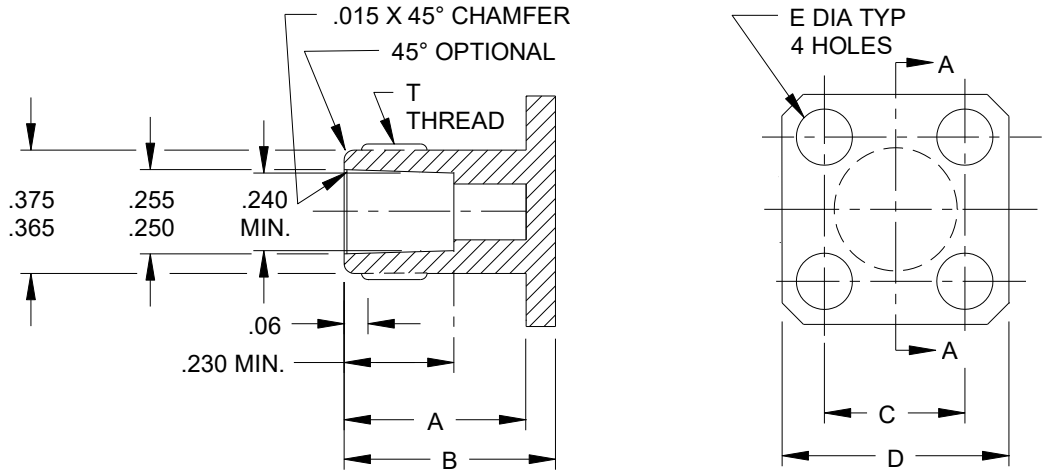


PIN M39012/25	A	B	C	D	E	T (thread)	Series
-X029	.99 (25.1)	1.07 (27.9)	.510 (12.95)	.700 (17.78)	.125 (3.18)	.4375-28-UNEF-2A	TK
-3029	.96 (24.4)	1.01 (25.6)	.490 (12.45)	.680 (17.27)			

NOTES:
1. Dimensions are in inches.

FIGURE 18. M39012/25-X029 or M39012/25-3029, dummy stowage, series TK.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

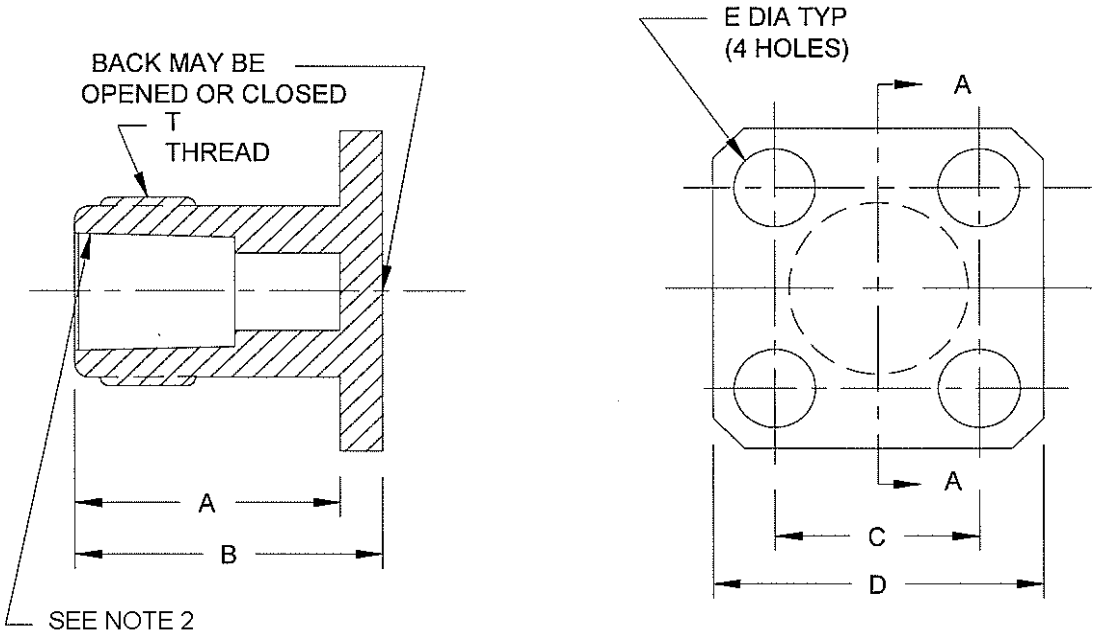


PIN M39012/25	A	B	C	D	E	T (thread)	Series
-X030	.630 (16.00)	.725 (18.42)	.504 (12.88)	.70 (17.8)	.125 (3.18)	.4375-28-UNEF-2A	TNC
-3030	.540 (13.70)	.625 (15.88)	.496 (12.60)	.68 (17.3)			

NOTES:
1. Dimensions are in inches.
2. Interface shall be in accordance with MIL-STD-348, series TNC minus contacts and dielectric.

FIGURE 19. M39012/25-X030 or M39012/25-3030, dummy stowage, series TNC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

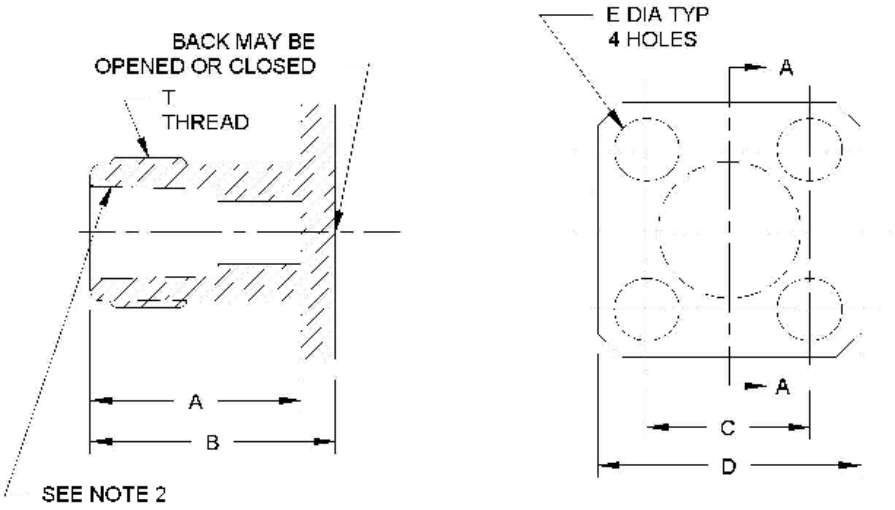


PIN M39012/25	A	B	C	D	E	T (thread)	Series
-3031	.340 (8.64)	.415 (10.54)	.342 (8.69)	.510 max. (12.95)	.102 (2.59)	.250-36-UNS-2A	SMA
-4031	.310 (7.87)	.365 (9.27)	.338 (8.59)				

NOTES:
1. Dimensions are in inches.
2. Interface shall be in accordance with MIL-STD-348, series SMA minus contacts and dielectric.

FIGURE 20. M39012/25-3031 or 4031, dummy stowage, series SMA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

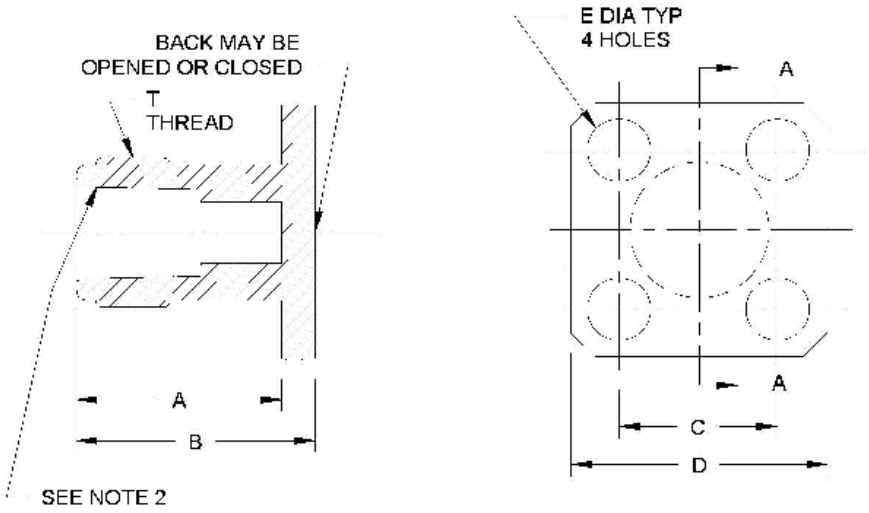


PIN M39012/25	A	B	C	D	E	T (thread)	Series
-X032	.671 (17.04)	.756 (19.20)	.723 (18.36)	1.00 (25.4)	.125 (3.18)	.625-24-UNEF-2A	N
-3032	.641 (16.28)	.716 (18.19)	.713 (18.11)	.985 (25.02)			

NOTES:
1. Dimensions are in inches.
2. Interface shall be in accordance with MIL-STD-348, series N minus contacts and dielectric.

FIGURE 21. M39012/25-X032 or M39012/25-3032, dummy stowage, series N.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

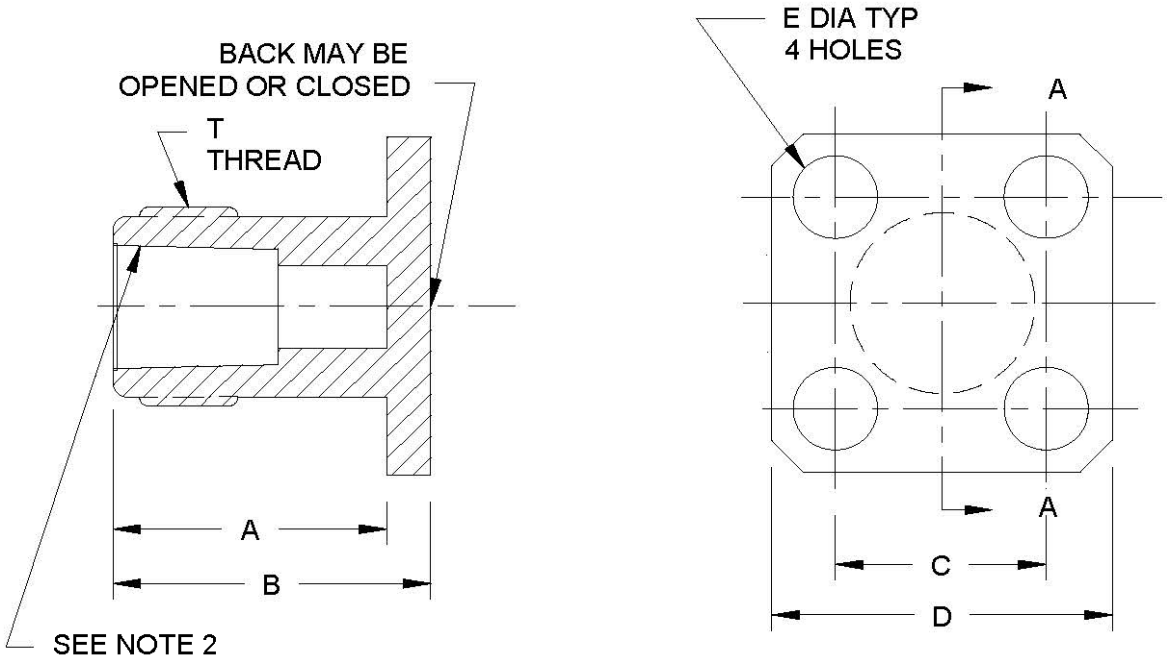

PIN M39012/25	A	B	C	D	E	T (thread)	Series
-X033	.865 (21.97)	.960 (24.38)	.720 (18.29)	1.00 (25.4)	.125 (3.18)	.6875-24-UNEF-2A	SC
-3033	.835 (21.21)	.910 (23.11)	.714 (18.14)	.985 (25.02)			

NOTES:
1. Dimensions are in inches.
2. Interface shall be in accordance with MIL-STD-348, series SC minus contacts and dielectric.

FIGURE 22. M39012/25-X033 or M39012/25-3033, dummy stowage, series SC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material: All materials and platings shall be in accordance with the requirements of MIL-PRF-39012.

Design and construction: See figures 1 through 22.

Corrosion (salt spray): In accordance with MIL-STD-202-101, test condition B..

The salt solution concentration shall be 5 percent.
Special detail: After exposure, hardware shall be washed, shaken and lightly brushed as specified in MIL-STD-202-101, and then permitted to dry for 24 hours at 40°C. Hardware shall then be examined for evidence of corrosion and pitting and ease of coupling.

Marking: Marking shall be in accordance with MIL-PRF-39012 except that the marking location may be on the wire rope jacket or on a shrink tubing on the wire rope.

Qualification by similarity: Connectors manufacturers may qualify all applicable PIN's for dust caps by similarity if they submit any representative sample of a bead chain, safety chain, and wire rope with applicable qualification testing. A manufacturer must be qualified to that connector series using that same material in order to be approved by similarity.

Cross reference data: See tables I and II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

TABLE I. Cross reference for hardware to connectors and cable. 1/

PIN 2/ M39012/25-	Figure number	Item-name	Applicable chain	Applicable cable	Applicable connector series
X001	1	Cover	Bead	----------	For use with all series C female connectors
X002			Safety		
X101			Wire rope		
X003	2	Cover	Bead	----------	For use with all series C male connectors
X004			Safety		
X103			Wire rope		
X005	3	Shield	----------	M17/6-RG11, M17/74-RG213, M17/163-00001, M17/75-RG214, M17/164-00001 and M17/77-RG216	
X006	4	Cover	Bead	----------	For use with all series BNC female connectors
X007			Safety		
X106			Wire rope		
X008	5	Cover	Bead	----------	For use with all series BNC male connectors
X009			Safety		
X010	6	Shield	----------	M17/84-RG223, M17/167-00001, M17/28-RG028 and M17/155-00001	
X011	7	Cap and chain	Bead	----------	For use with all series N female connectors
X012			Safety		
X111			Wire rope		
X013	8	Armor clamp	----------	M17/74-RG215, M17/6-RG12	Series C and N connectors using applicable cables and 11/16 accessory thread
X014	9	Armor clamp	----------	M17/79-RG219	
X015	10	Cap	----------	----------	For use with all series BNC female connectors
X016	11	Shorting plug	Bead	----------	For shorting series BNC female connectors
X017			Safety		
X116			Wire rope		
X018	12	Cap	Bead	----------	For use with all series TNC male connectors

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

See notes at end of the table.

TABLE I. Cross reference for hardware to connectors and cable – Continued. 1/

PIN 2/ M39012/25-	Figure number	Item-name	Applicable chain	Applicable cable	Applicable connector series
X019	12	Cap	Safety	----------	For use with all series TNC male connectors
X118			Wire rope		
X020	13	Cap	Bead	----------	For use with all series TNC female connectors
X021			Safety		
X120			Wire rope		
X022	14	Cap	Bead, safety and wire rope	---------	For use with all series SC female connectors
X023			Bead		
X122			Wire rope		
3024	15	Cap	Bead	---------	For use with all series SMA female connectors
3025			Safety		
3124			Wire rope		
4024			Bead		
4025			Safety		
4124			Wire rope		
3026	16	Plug	Bead	---------	For use with all series SMA male connectors
3027			Safety		
3126			Wire rope		
4026			Bead		
4027			Safety		
4126			Wire rope		
X028	17	Cap	Wire rope	----------	For use with all series TRB female connectors
X029 3029	18	Dummy stowage	----------	----------	For use with all series TK male connectors
X030 3030	19	Dummy stowage	----------	----------	For use with all series TNC male connectors
3031 4031	20	Dummy stowage	----------	----------	For use with all series SMA male connectors
X032 3032	21	Dummy stowage	----------	----------	For use with all series N male connectors

See notes at end of the table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

TABLE I. Cross reference for hardware to connectors and cable – Continued. 1/

PIN 2/ M39012/25-	Figure number	Item-name	Applicable chain	Applicable cable	Applicable connector series
X033 3033	22	Dummy stowage	----------	----------	For use with all series SC male connectors

1/ This hardware is superseded by MIL-C-71, MIL-C-3989, MIL-C-3608, REA49131, REB49047, REA49049 and REB49068.
2/ The PIN (including dash number) with the definition of its makeup is defined in section 1 of the basic specification, MIL-PRF-39012.

TABLE II. Cross reference PIN to superseded type designation.

PIN M39012/25-	Superseded type designation
0001	MX-1142A/U
0003	MX-1143A/U
0005	MX1144/U
0006	CW-123A/U
0008	CW-282/U
0010	MX-195A/U
0011	MX-913/U
0013	MX-1286/U
0014	MX-1441/U
0015	CW-155A/U
0016 0017	CW-159/U

Amendment Notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-39012, this document references the following:

MIL-DTL-83420
MIL-STD-202-101
MIL-STD-348
MIL-PRF-49142

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2022-217)

Review activities:
Army – AR, AT, AV, EA
Navy – AS, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:48Z
Check the source to verify that this is the current version before use.