MILITARY SPECIFICATION SHEET


CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY,

(SERIES TNC (CABLED), PIN CONTACT, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-39012.

MARKING IMPLEMENTATION DATE, CATEGORY B, SEE TABLE IV

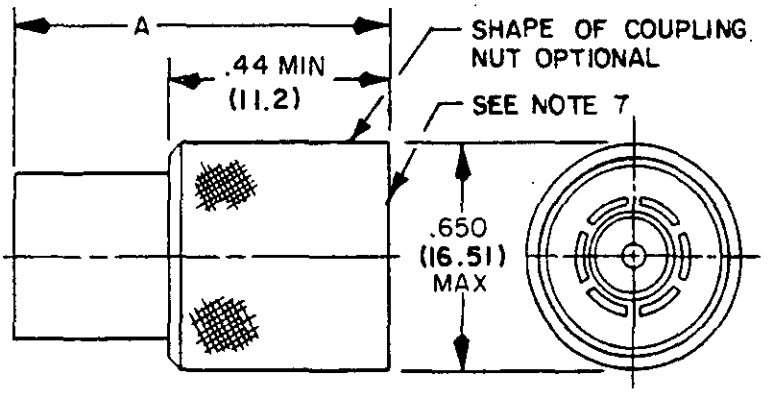


NOTES:
1. Dimensions are in inches.
2. For dimension A, see table I and III.
3. Metric equivalents are given for general information only.
4. Wrench flats are to accommodate standard wrench opening in accordance with FED-STD-H28, appendix 10.
5. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
6. All undimensioned pictorial configurations are for reference purposes only.
7. Series TNC, pin contact interface in accordance with MIL-STD-348.
8. Metric equivalents are in parentheses.

FIGURE 1. General configuration.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

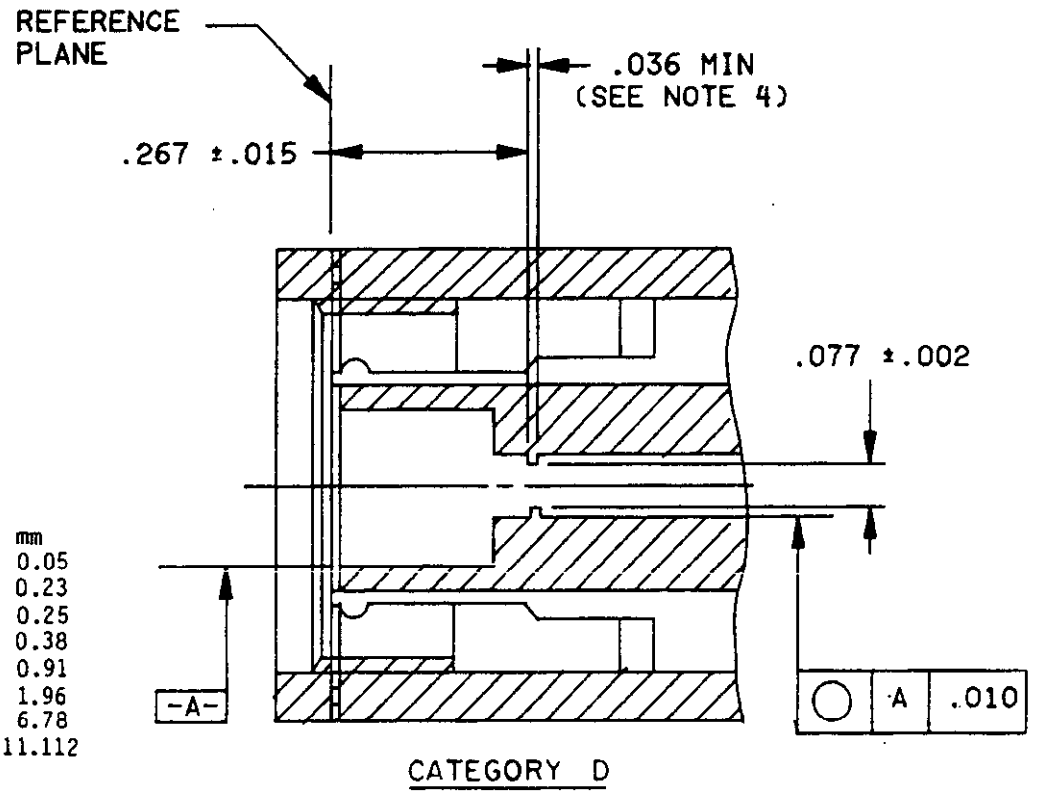

CATEGORY D

Inches	mm
.002	0.05
.009	0.23
.010	0.25
.015	0.38
.036	0.91
.077	1.96
.276	6.78
.4375	11.112

NOTES:
1. Metric equivalents are given for general information only.
2. Three holes .027 (0.69 mm) minimum diameter equally spaced for safety wiring. Location on coupling nut optional.
3. All undimensioned pictorial configurations are for reference purposes only.
4. Chamfer is optional.
5. Dimensions are in inches.

FIGURE 2. Category D captivation detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross reference, and dimensions.

Dash number 1/	Applicable cable M17/#	Dimensions	Inches (millimeters) maximum
Category A - Field serviceable (no special tools required)			
0101 3/	028-RG058 084-RG223* 128-RG400 060-RG142@	A	1.250 (31.75)
0102 3/	29-RG59*Δ 030-RG062Δ 90-RG71Δ 97-RG210Δ		
0103 3/	054-RG122*		
0104 3/	111-RG303@*		
0117 3/	110-RG302*@Δ		
0018 3/	113-RG316*@ 119-RG174		
Category C - Field replaceable (MIL-C-22520 crimp tool) 2/ See footnote symbol next to applicable cable for crimp die			
0010 3/	028-RG058*~ 111-RG303@~	A	1.500 (38.10)
0011 3/	084-RG223*~ 128-RG400~ 060-RG142@~		
0012 3/	29-RG59*Δ> 030-RG062Δ> 97-RG210Δ>		
0013 3/	054-RG122*&		
0014 3/	90-RG71*Δ>		
0021 3/	110-RG302*Δ@>		
0022 3/	113-RG316@*Σ 119-RG174Σ		
0023 3/	95-RG180Δ*&		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross reference, and dimensions - Continued.

Dash number 1/	Applicable cable M17/#	Dimensions	Inches (millimeters) maximum
Category D - Field replaceable - Defined piece parts 2/4/5/			
0501 3/	054-RG122*	A	1.187 (30.16)
0502 3/	095-RG180*Δ		
0503 3/	060-RG142* 128-RG400		
0504 3/	028-RG058*		

1/ For cross reference of dash number to superseded part number or type designation, see table IV.

2/ These connectors are assembled, using the applicable crimp tool, to the specified cables stripped as shown on figure 4.

3/ These connectors have captivated center contacts.

4/ Complete connector assembly shall consist of a body, center contact, ferrule, and assembly instructions.

5/ Not to be used in Army equipment.

The latest version of each cable shall be applicable.

* Cable to be used when performing tests requiring cable except as in notes @ and Δ.

@ Cable to be used for the +200°C temperature cycling tests.

Δ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.


Σ M22520/5-35 Closure B or M22520/5-03 Closure A

& M22520/5-41 Closure B or M22520/5-05 Closure B
M22520/5-09 Closure A

~ M22520/5-19 Closure B or M22520/5-05 Closure A
M22520/5-11 Closure A
M22520/5-57 Closure A

> M22520/5-19 Closure A or M22520/5-07 Closure A
M22520/5-13 Closure A
M22520/5-59 Closure A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

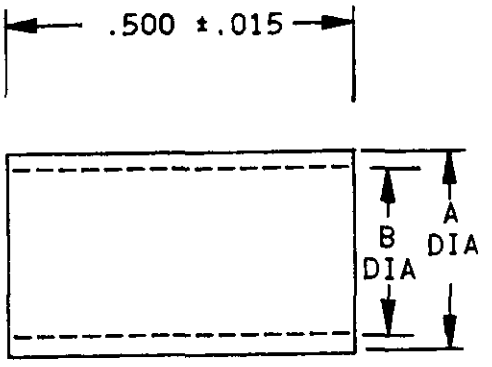


CRIMP FERRULE

Dash no.	Ferrule no. 2/	A +.001	B ±.001	Basic crimp tool 1/	Crimp die or positioner M22520/5-
0501 0502	26-50	.212	.175	M22520/5-01	05, 41 Closure B or 9 Closure A
0503	26-51	.250	.220		05, 11, 57 Closure A or 19 Closure B
0504	26-52	.245	.206		

1/ Class 2 tool may be used by OEM (see MIL-C-22520).
2/ Contact numbers and ferrule numbers are for identification only..

FIGURE 3. Contact and ferrule dimensions for category D only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

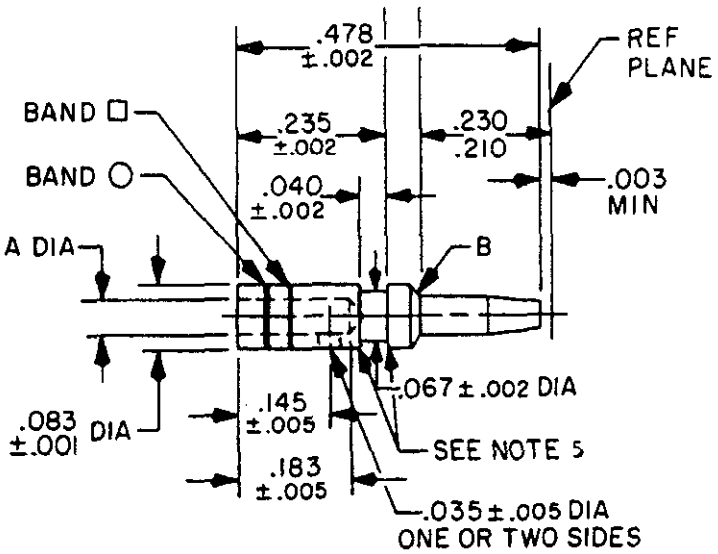

Inches	mm	Inches	mm
.001	0.03	.145	3.68
.002	0.05	.175	4.45
.003	0.08	.183	4.65
.005	0.13	.206	5.23
.015	0.38	.210	5.33
.017	0.43	.212	5.38
.033	0.84	.220	5.59
.035	0.89	.230	5.84
.040	1.02	.235	5.97
.041	1.04	.245	6.22
.043	1.09	.250	6.35
.067	1.70	.478	12.14
.083	2.11	.500	12.70

CENTER CONTACT


Dash no.	Contact no. 2/	A +.001 -.002	B	Basic crimp tool 1/	Crimp die or positioner	Crimp tensile min	Color band □	Color band ○
0501	26-12	.033	.005 +.003 -.000 x 45°	M22520/1-01	M22520/1-12	10 lbs	Orn	Yellow
0502	26-11	.017	.005 +.003 -.000 x 30°			6 lbs	Blue	
0503 0504	26-10	.043	.005 +.003 -.000 x 45°	M22520/1-01	M22520/1-12	20 lbs	Red	

1/ Class 2 tool may be used by OEM (see MIL-C-22520).
2/ Contact numbers and ferrule numbers are for identification only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Crimp tensile test shall be in accordance with MIL-C-39029.
4. Copyright notice: All information disclosed in these specification sheets which is or may be copyrighted is reproduced herein with the express permission of the copyright owner.
5. .003 (0.08 mm) maximum break.

FIGURE 3. Contact and ferrule dimensions for category D only - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

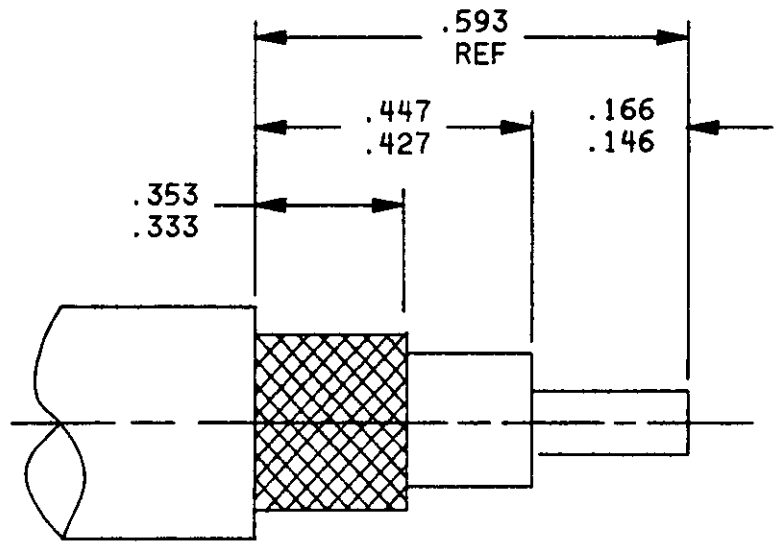

Inches	mm
.146	3.71
.166	4.22
.333	8.46
.353	8.97
.427	10.85
.447	11.35
.593	15.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Cable stripping dimensions for field replaceable connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: 50 ohms.

Frequency range: 0 to 11,000 MHz.

Voltage rating:

500 volts rms, maximum working voltage at sea level.

125 volts rms, maximum at 70,000 feet.

Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 2 inch-pounds, maximum.

Coupling proof torque: 15 inch-pounds, minimum.

Inspection conditions:

Coupling torque: 4 to 6 inch-pounds.

Mating characteristics:

Reference MIL-STD-348 and figure 2 for dimensions.

Outer contact:

Test ring ID: .319, maximum, 16 microinch finish.

Insertion force: 5 pounds, maximum when inserted a minimum of .093.

Contacts with slotted members: Shall contact a .324, minimum diameter ring within .031 of their tip ends.

Hermetic seal: Not applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: Method 302 of MIL-STD-202, test condition B, 5,000 megohms, minimum.

Center contact retention: 6 pounds, minimum axial force. Applicable to captivated-center-contact connectors only.

Corrosion (salt spray): Method 101 of MIL-STD-202, test condition B.

Voltage standing wave ratio (VSWR): From 500 to 11,000 MHz, or approximately 80 percent of upper cutoff frequency of the cable, whichever is lower; 1.30, maximum.

Swept frequency VSWR test setup:

Item 6: VSWR shall be less than 1.02+.003 F (F in GHz).

Item 16: VSWR shall be less than 1.02+.003 F (F in GHz).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

Second step of VSWR checkout procedure: VSWR shall be less than 1.06+.007 F (F in GHz).

Group B inspection: VSWR shall be less than 1.05+.005 F (F in GHz).

Qualification and group C inspection: VSWR shall not exceed 1.10.

Connector durability: 500 cycles, minimum at 12 cycles per minute, maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms, maximum:

	Initial	After environment
Center contact	1.5	2.0
Outer contact	.2	Not applicable
Braid to body	.1	Not applicable

Dielectric withstanding voltage: Method 301 of MIL-STD-202, 1,500 volts rms, minimum at sea level.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B. No discontinuity permitted.

Shock: Method 213 of MIL-STD-202, test condition G. No discontinuity permitted.

Thermal shock: Method 107 of MIL-STD-202, test condition B, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cables (see tables I and III).

Moisture resistance: Method 106 of MIL-STD-202. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level:

Voltage: 375 volts rms, minimum.

Altitude: 70,000 feet.

RF high potential withstanding voltage:

Voltage and frequency: 1,000 volts rms at a frequency from 5 to 7.5 MHz.

Leakage current: Not applicable.

Cable retention force:

Noncrimp assemblies: 40 pounds minimum.

Crimp assemblies:

10 pounds, minimum for cables .155 - .189 OD.

20 pounds, minimum for cables .190 - .229 OD.

30 pounds, minimum for cables .230 - .249 OD.

40 pounds, minimum for cables .250 OD and larger.

Coupling mechanism retention force: 100 pounds, minimum.

RF leakage: -60 dB minimum, tested at a frequency between 2 and 3 GHz.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

Insertion loss:

.18 dB maximum tested at 9 GHz.

$.06\sqrt{F\ (GHz)}$ dB maximum tested at 3 GHz and 6 GHz.

Part number: M39012/26 (dash number from table I or "B" number from table III).

TABLE II. Group qualification.

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
	M39012/26	M39012/26
I	-0101 -0103 -0104 -0018	-0101 -0102 -0103 -0104 -0117 -0018
II	-0002 -0017	-0002 -0017
III	B0005 B0006 B0008 B0015 B0016 B0020	B0005 B0006 B0007 B0008 B0009 B0015 B0016 B0019 B0020
IV	B0007 B0009 B0019	B0007 B0009 B0019
V	-0010 -0011 -0013 -0022 -0023	-0010 -0011 -0012 -0013 -0014 -0021 -0022 -0023
VI	-0012 -0014 -0021	-0012 -0014 -0021
VII	-0501 -0503 -0504	-0501 -0502 -0503 -0504
VIII	-0502	-0502

NOTE: If a connector manufacturer produces a connector which meets all the requirements for two or more connector part numbers (within the same series), the manufacturer may receive qualification approval for two or more connector part numbers qualifying the one connector. It is not necessary that such connectors be in the same group. Each connector, however, must be marked with its own appropriate part number. For group qualification, the connectors must be of similar design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

TABLE III. Category B - Nonfield replaceable (special tools may be required).

Not for Air Force or Navy use. For OEM use only.

Dash number 1/ 2/ 3/	Applicable cable M17/#	Dimensions	Inches (millimeters) maximum
M39012/26B0005	028-RG058*	A	1.500 (38.10)
M39012/26B0006	060-RG142@* 128-RG400		
M39012/26B0007	29-RG59*Δ 030-RG062Δ 97-RG210Δ		
M39012/26B0008	054-RG122*		
M39012/26B0009	90-RG71*Δ		
M39012/26B0015	111-RG303*@		
M39012/26B0016	084-RG223*		
M39012/26B0019	110-RG302@*Δ		
M39012/26B0020	113-RG316@* 119-RG174		

1/ For cross reference of dash number to superseded part number or type designation, see table IV.

2/ For maintenance requirements for category B, see table V.

3/ Inactive for new design.

The latest version of each cable shall be applicable.

* Cable to be used when performing tests requiring cable except as in notes @ and Δ.

@ Cable to be used for the +200°C temperature cycling tests.

Δ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Cross reference of part numbers.

Preferred part number M39012/26	Substitute for part number or type designation 1/ 2/ 3/
-0010	M23329/4-01, M23329/4-03
-0011	M23329/4-02, M23329/4-04
-0012	M23329/4-05
-0023	M23329/4-06
-0101	M39012/26-0001
-0102	M39012/26-0002
-0103	M39012/26-0003
-0104	M39012/26-0004
-0117	M39012/26-0017
B0005	M39012/26-0005
B0006	M39012/26-0006
B0007	M39012/26-0007
B0008	M39012/26-0008
B0009	M39012/26-0009
B0015	M39012/26-0015
B0016	M39012/26-0016
B0019	M39012/26-0019
B0020	M39012/26-0020

1/ The superseded part number or the type designation is for cross reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M39012/26-XXXX shall be used in all cases for marking and identifying the connector.

2/ The basic type designation includes all letter versions of the specified number, e.g. UG-18/U includes UG-18 A/U, UG-18B/U, etc.

3/ The new "B" part numbers will be required marking 6 months from the date of this specification. The previous part number may be used in the interim.

TABLE V. Maintenance replacements for category B.

Category B number* Inactive for new design	Category C dash number	Category A dash number	Category D dash number
B0005	0010	0101	0504
B0006	0011	0101	0503
B0007	0012	0102	---
B0008	0013	0103	0501
B0009	0014	0102	---
B0015	0010	0104	---
B0016	0011	0101	---
B0019	0021	0117	---
B0020	0022	0018	---

*Category B connectors are for original installation only. They will not be stocked or acquired by the Government.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.

Revision letters are not used in denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - CR, EA, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3518-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:49Z
Check the source to verify that this is the current version before use.