INCH-POUND
MIL-P-23469/3B(SH)
19 February 1988
SUPERSEDING
MIL-P-23469/3A(SHIPS)
31 May 1967

MILITARY SPECIFICATION SHEET

PIN-RIVET, GROOVED, BRAZIER, TRUSS AND FLUSH HEAD; STRAIGHT SHANK, WIDE GRIP RANGE, MULTIPLE LOCKING GROOVES, ALUMINUM ALLOY AND CARBON STEEL

This specification sheet is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the pins described herein shall consist of this specification and the latest issue of MIL-P-23469.

Brazier truss and flush head, swage-locking pins shall be furnished in the following type and classes, manufactured in accordance with MIL-P-23469:


Type III - Wide grip range multiple locking groove

Class 1 - Aluminum alloy
Class 3 - Carbon steel

AMSC N/A FSC 5320
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:59Z
Check the source to verify that this is the current version before use.

M23469/3*

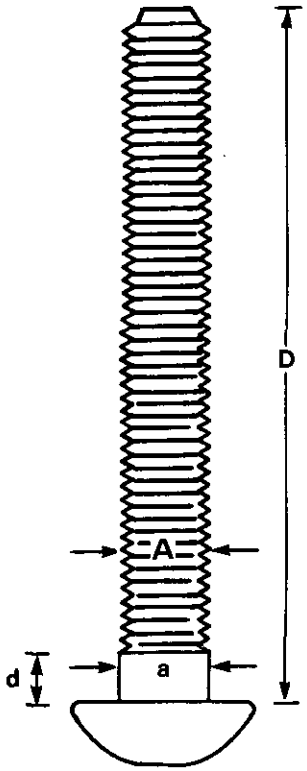

PIN DATA

Class 1	Class 3									
ALUM	Carbon Steel	No. Dia.	A	B	C	+.025 D-.000	a Ref.	b Ref.	Grip Range 1/ Min	Max.
110610	130610	3/16	.187 .183	3/8	1/8	1.788	.169	.120	1/16	5/8
110620	130620					2.370	.194	.370	5/16	1-1/4
210610	230610			15/32	3/32	1.788	.169	.120	1/16	5/8
210620	230620					2.370	.194	.370	5/16	1-1/4
310610	330610			11/32	5/64	1.788	.169	.120	1/16	5/8
310620	330620					2.370	.194	.370	5/16	1-1/4
110810	130810	1/4	.249 .245	1/2	9/64	1.965	.222	.155	1/16	5/8
110820	130820					2.560	.257	.370	5/16	1-1/4
210810	230810			9/16	7/64	1.965	.222	.155	1/16	5/8
210820	230820					2.560	.257	.370	5/16	1-1/4
310810	330810			15/32	7/64	1.965	.222	.155	1/16	5/8
310820	330820					2.560	.257	.370	5/16	1-1/4
111012	131012	5/16	.310 .307	5/8	3/16	2.340	.276	.160	1/8	3/4
111022	131022					2.840	.320	.660	5/8	1-3/8
211012	231012			3/4	1/8	2.340	.276	.160	1/8	3/4
211022	231022					2.840	.320	.660	5/8	1-3/8
311012	331012			9/16	9/64	2.340	.276	.160	1/8	3/4
311022	331022					2.840	.320	.660	5/8	1-3/8
111214	131214	3/8	.372 .369	3/4	15/64	2.875	.336	.250	1/8	7/8
111226	131226					3.500	.383	.870	3/4	1-5/8
211214	231214			7/8	5/32	2.875	.336	.250	1/8	7/8
211226	231226					3.500	.383	.870	3/4	1-5/8
311214	331214			11/16	5/32	2.875	.336	.250	1/8	7/8
311226	331226					3.500	.383	.870	3/4	1-5/8

HOLE DATA

FASTENER DIAMETER	MAX. HOLE DIA.
3/16	13/64
1/4	17/64
5/16	21/64
3/8	25/64


1/ No gap condition.
2/ Part number example - M23469/3-11214

- Basic or general specification
- Style - brazier head
- Material - aluminum alloy
- Diameter in 1/32 inch (3/8)
- Grip in 1/16 inch (7/8 + 1/8)

SH 13203045

FIGURE 1. Type III - wide grip range multiple locking grooves.

Source: https://assist.dla.mil -- Downloaded: 2026\0-19116:59Z
Check the source to verify that this is the current version before use.

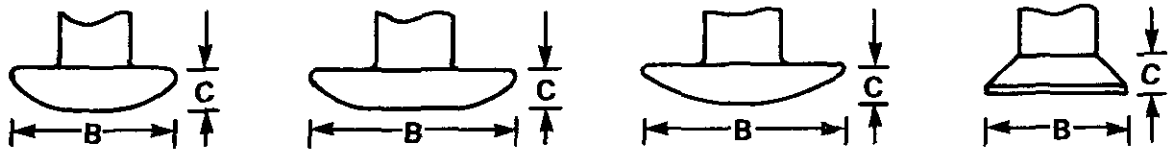

1 INCH PART NO. (BRAZIER HEAD)

2 INCH PART NO. (TRUSS HEAD)*


2 INCH PART NO. (TRUSS HEAD)**

3 INCH PART NO. (90° FLAT HEAD)


*NO MARKINGS ON TOP OF 1/4-INCH DIAMETER HEAD. NOT AVAILABLE IN 3/16-INCH DIAMETER ONLY.

**AVAILABLE IN 3/16-INCH DIAMETER ONLY. NO MARKINGS ON TOP OF HEAD.


1 INCH PART NO.
BRAZIER HEAD

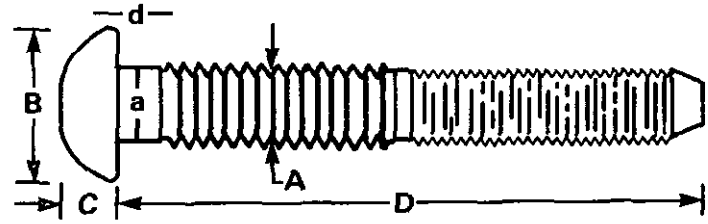

3 INCH PART NO.
90° FLUSH



2 INCH PART NO.
TRUSS HEAD



SH 13203045-A

Hole data

Fastener diameter		Max hole
16	1/2	9/16
20	5/8	11/16
24	3/4	13/16

M23469/3

Pin data

Carbon steel Class 3	Nom dia	A	Brazier head MGPB B	Brazier head MGPB C	90° flush head MPG 90 B	90° flush head MPG 90 C	Truss head MGPT B	Truss head MGPT C	D max	a max	d nom	Grip range min	Grip range max
( )31616	1/2	500	29/32	5/16	29/32	1/4	59/64	15/64	3-7/8	500	3/8	1/4	1-1/4
( )31628									4-5/8	500	1-1/8	1	2
( )31636		493							5-1/6	500	1-5/8	1-1/2	2-1/2
( )32016	5/8	625	1-9/64	25/64	1-5/32	5/16	1-9/64	19/64	4-9/16	---	---	1/4	1-1/4
( )32028									5-5/16	625	7/8	1	2
( )32044		616							6-5/16	625	1-7/8	2	3
( )32416	3/4	750	1-3/8	1/2	1-3/8	3/8	1-3/8	23/64	5-1/4	---	---	1/4	1-1/4
( )32428									6	750	7/8	1	2
( )32444		740							7	750	1-7/8	2	3

NOTE:
1. Dimensions are in inches.

FIGURE 1. Type III - wide grip range multiple locking grooves. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:59Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5320-N024-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:59Z
Check the source to verify that this is the current version before use.