MILITARY SPECIFICATION SHEET

PIN SWAGE-LOCKING, BUTTON HEAD, STRAIGHT SHANK, SIX LOCKING GROOVE AND MULTIPLE LOCKING GROOVE. ALUMINUM ALLOY, CORROSION RESISTANT STEEL AND CARBON STEEL.


THE COMPLETE REQUIREMENTS FOR PROCURING THE SWAGE-LOCKING PINS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF SPECIFICATION MIL-P-23469.

BUTTON HEAD, SWAGE-LOCKING PINS SHALL BE FURNISHED IN THE FOLLOWING TYPES AND CLASSES. PINS MANUFACTURED TO THIS SPECIFICATION ARE INTENDED FOR USE WITH COLLARS MANUFACTURED TO MIL-P-23469.


TYPE I SIX LOCKING GROOVE (SEE FIGURE 1)
TYPE II MULTIPLE LOCKING GROOVE (SEE FIGURE 2)

CLASS 1 ALUMINUM ALLOY
CLASS 2 CORROSION RESISTANT STEEL
CLASS 3 CARBON STEEL

TYPE I - SIX LOCKING GROOVE PINS

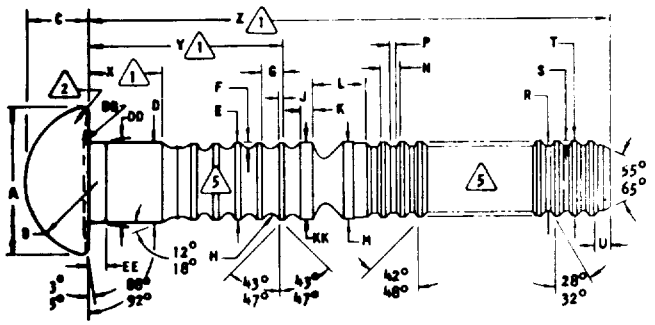

SWAGE-LOCKING FASTENER INSTALLATIONS WHICH SHOW HOW THE TYPE OF MATING COLLAR AFFECTS GRIP RANGE OF A PIN (A)

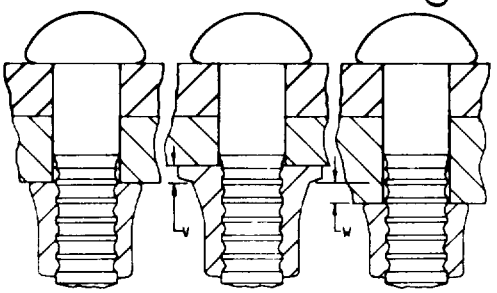

INSTALLED WITH REGULAR COLLAR | INSTALLED WITH FLANGED COLLAR | INSTALLED WITH LOW PROFILE COLLAR

(A)

NOM DIA.	A DIA.	B REF. RAD.	BB RAD.	C	CC 3	D DIA.	DD DIA. 4	E DIA.	EE 4	F	FF 6	G PITCH	H RAD. REF.	J	K MAX.	KK BSA.	L MAX.
3/16	.342 .312	.175	.015 .020	.135 .145	.015	.195 .191	.196	.1845 .1815	.047	.012 .014	.187	.041 .043	.013	.004 .006	.036	.1845 .1780	.250
1/4	.458 .418	.237	.015 .020	.181 .195	.015	.259 .254	.260	.2415 .2355	.063	.0155 .0175	.250	.054 .056	.018	.006 .008	.046	.2415 .2355	.250
5/16	.571 .521	.291	.015 .025	.244 .234	.020	.322 .317	.324	.3045 .2975	.078	.019 .021	.312	.068 .070	.024	.007 .009	.066	.3015 .2950	.250
3/8	.686 .626	.350	.020 .025	.269 .293	.020	.385 .380	.387	.369 .360	.094	.024 .028	.375	.082 .086	.026	.008 .012	.102	.369 .360	.375

NOM DIA.	M DIA.	N 7 PITCH	P	R DIA.	S	T MAX. DIA.	U MIN.	V 9 FLANGED COLLAR	W 10 LOW PROFILE COLLAR	HOLE PREPARATION DATA 8 SIZE DRILL	HOLE PREPARATION DATA 8 MAX. HOLE DIA.
3/16	.1835 .1720	.0307 .0317	.012 .014	.168 .164	.0045 .0065	.181	.047	.047	.094	NO. 9 (.196)	13/64
1/4	.2405 .2250	.0463 .0473	.015 .017	.211 .207	.013 .015	.241	.063	.063	.125	LET. "G" (.261)	17/64
5/16	.3005 .2810	.0463 .0473	.015 .017	.267 .263	.013 .015	.297	.078	.078	.125	LET. "P" (.323)	21/64
3/8	.3665 .3410	.0463 .0473	.0185 .0205	.331 .327	.0065 .0095	.350	.094	.094	.156	LET. "W" (.386)	25/64

DIMENSIONS IN INCHES.
SHANK MUST BE STRAIGHT WITHIN .004 TOTAL INDICATOR READING (T.I.R.) PER INCH OF LENGTH.

1. "X", "Y", AND "Z" SHOWN ON TABLE I.
2. RADIUS IS NATURAL FLOW OF MATERIAL.
3. CONICAL SURFACE OF HEAD TO "D" BODY DIAMETER MUST BE CONCENTRIC WITHIN "CC" TOTAL INDICATOR READING (T.I.R.).
4. SHANK TAPER PERMISSIBLE: "DD" MAXIMUM DIAMETER; "EE" MAXIMUM LENGTH.
5. DIMENSIONS INDICATED ON LOCKING GROOVES AND PULL GROOVES ARE TYPICAL.
6. MAXIMUM DEPTH OF .0015 AND MAXIMUM WIDTH OF "FF" PERMISSIBLE UNDERFILL ALONG "D" BODY DIAMETER.
7. ACCUMULATED PITCH TOLERANCE NOT TO EXCEED ±.002 ON ANY TEN CONSECUTIVE PULL GROOVES.
8. FOR INTERFERENCE FIT REQUIREMENTS, SHEET HOLE SIZE TO BE A MAXIMUM OF .003 SMALLER THAN ACTUAL PIN "D" BODY DIAMETER.

COLLAR: REGULAR HEIGHT - USE GRIP SHOWN ON TABLE I.

9. FLANGED - ADD FLANGE THICKNESS "V" TO ACTUAL THICKNESS TO BE FASTENED TO DETERMINE "GRIP" TO BE USED IN SPECIFYING DASH NUMBER, TABLE I.
10. LOW PROFILE - SUBTRACT "W" FROM ACTUAL THICKNESS TO BE FASTENED TO DETERMINE "GRIP" TO BE USED IN SPECIFYING DASH NUMBER, TABLE I.

(A) FOR CHANGES SEE PAGES 1, 3, AND 4.

FSC 5320

NOTE: MIL-P-23469/4A AND MIL-P-23469/4 PINS ARE INTERCHANGEABLE TYPE FOR TYPE, CLASS FOR CLASS, AND SIZE FOR SIZE.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION SHEET

TABLE I - SIX LOCKING GROOVE PINS.

DASH NUMBER IDENTIFICATION

M23469/4 (1)			3/16 DIAMETER					M23469/4 (1)			1/4 DIAMETER				
ALUM	CRES	CARBON STEEL	GRIP		X	Y	Z	ALUM	CRES	CARBON STEEL	GRIP		X	Y	Z
CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.	±.015	±.010	+.00 -.13	CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.	±.015	±.010	+.00 -.13
-10602	-20602	-30602	.062	.187	.062	.326	1.50	-10802	-20802	-30802	.062	.187	.062	.396	1.63
-10603	-20603	-30603	.125	.250	.125	.389	1.56	-10803	-20803	-30803	.125	.250	.125	.459	1.69
-10604	-20604	-30604	.187	.312	.187	.451	1.63	-10804	-20804	-30804	.187	.312	.187	.521	1.75
-10605	-20605	-30605	.250	.375	.250	.514	1.69	-10805	-20805	-30805	.250	.375	.250	.584	1.81
-10606	-20606	-30606	.312	.437	.312	.576	1.75	-10806	-20806	-30806	.312	.437	.312	.646	1.88
-10607	-20607	-30607	.375	.500	.375	.639	1.81	-10807	-20807	-30807	.375	.500	.375	.709	1.94
-10608	-20608	-30608	.437	.562	.437	.701	1.88	-10808	-20808	-30808	.437	.562	.437	.771	2.00
-10609	-20609	-30609	.500	.625	.500	.764	1.94	-10809	-20809	-30809	.500	.625	.500	.834	2.06
-10610	-20610	-30610	.562	.687	.562	.826	2.00	-10810	-20810	-30810	.562	.687	.562	.896	2.13
-10611	-20611	-30611	.625	.750	.625	.889	2.06	-10811	-20811	-30811	.625	.750	.625	.959	2.19
-10612	-20612	-30612	.687	.812	.687	.951	2.13	-10812	-20812	-30812	.687	.812	.687	1.021	2.25
-10613	-20613	-30613	.750	.875	.750	1.014	2.19	-10813	-20813	-30813	.750	.875	.750	1.084	2.31
-10614	-20614	-30614	.812	.937	.812	1.076	2.25	-10814	-20814	-30814	.812	.937	.812	1.146	2.38
-10615	-20615	-30615	.875	1.000	.875	1.139	2.31	-10815	-20815	-30815	.875	1.000	.875	1.209	2.44
-10616	-20616	-30616	.937	1.062	.937	1.201	2.38	-10816	-20816	-30816	.937	1.062	.937	1.271	2.50
-10617	-20617	-30617	1.000	1.125	1.000	1.264	2.44	-10817	-20817	-30817	1.000	1.125	1.000	1.334	2.56
-10618	-20618	-30618	1.062	1.187	1.062	1.326	2.50	-10818	-20818	-30818	1.062	1.187	1.062	1.396	2.63
-10619	-20619	-30619	1.125	1.250	1.125	1.389	2.56	-10819	-20819	-30819	1.125	1.250	1.125	1.459	2.69
-10620	-20620	-30620	1.187	1.312	1.187	1.451	2.63	-10820	-20820	-30820	1.187	1.312	1.187	1.521	2.75
-10621	-20621	-30621	1.250	1.375	1.250	1.514	2.69	-10821	-20821	-30821	1.250	1.375	1.250	1.584	2.81
-10622	-20622	-30622	1.312	1.437	1.312	1.576	2.75	-10822	-20822	-30822	1.312	1.437	1.312	1.646	2.88
-10623	-20623	-30623	1.375	1.500	1.375	1.639	2.81	-10823	-20823	-30823	1.375	1.500	1.375	1.709	2.94
-10624	-20624	-30624	1.437	1.562	1.437	1.701	2.88	-10824	-20824	-30824	1.437	1.562	1.437	1.771	3.00
-10625	-20625	-30625	1.500	1.625	1.500	1.764	2.94	-10825	-20825	-30825	1.500	1.625	1.500	1.834	3.06
-10626	-20626	-30626	1.562	1.687	1.562	1.826	3.00	-10826	-20826	-30826	1.562	1.687	1.562	1.896	3.13
-10627	-20627	-30627	1.625	1.750	1.625	1.889	3.06	-10827	-20827	-30827	1.625	1.750	1.625	1.959	3.19
-10628	-20628	-30628	1.687	1.812	1.687	1.951	3.13	-10828	-20828	-30828	1.687	1.812	1.687	2.021	3.25
-10629	-20629	-30629	1.750	1.875	1.750	2.014	3.19	-10829	-20829	-30829	1.750	1.875	1.750	2.084	3.31
-10630	-20630	-30630	1.812	1.937	1.812	2.076	3.25	-10830	-20830	-30830	1.812	1.937	1.812	2.146	3.38
-10631	-20631	-30631	1.875	2.000	1.875	2.139	3.31	-10831	-20831	-30831	1.875	2.000	1.875	2.209	3.44
-10632	-20632	-30632	1.937	2.062	1.937	2.201	3.38	-10832	-20832	-30832	1.937	2.062	1.937	2.271	3.50

M23469/4 (1)			5/16 DIAMETER					M23469/4 (1)			3/8 DIAMETER				
ALUM	CRES	CARBON STEEL	GRIP		X	Y	Z	ALUM	CRES	CARBON STEEL	GRIP		X	Y	Z
CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.	±.015	±.010	+.00 -.13	CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.	±.015	±.010	+.00 -.13
-11004	-21004	-31004	.125	.375	.125	.570	1.97	-11204	-21204	-31204	.125	.375	.125	.658	2.25
-11006	-21006	-31006	.250	.500	.250	.695	2.09	-11206	-21206	-31206	.250	.500	.250	.783	2.38
-11008	-21008	-31008	.375	.625	.375	.820	2.22	-11208	-21208	-31208	.375	.625	.375	.908	2.50
-11010	-21010	-31010	.500	.750	.500	.945	2.34	-11210	-21210	-31210	.500	.750	.500	1.033	2.63
-11012	-21012	-31012	.625	.875	.625	1.070	2.47	-11212	-21212	-31212	.625	.875	.625	1.158	2.75
-11014	-21014	-31014	.750	1.000	.750	1.195	2.59	-11214	-21214	-31214	.750	1.000	.750	1.283	2.88
-11016	-21016	-31016	.875	1.125	.875	1.320	2.72	-11216	-21216	-31216	.875	1.125	.875	1.408	3.00
-11018	-21018	-31018	1.000	1.250	1.000	1.445	2.84	-11218	-21218	-31218	1.000	1.250	1.000	1.533	3.13
-11020	-21020	-31020	1.125	1.375	1.125	1.570	2.97	-11220	-21220	-31220	1.125	1.375	1.125	1.658	3.25
-11022	-21022	-31022	1.250	1.500	1.250	1.695	3.09	-11222	-21222	-31222	1.250	1.500	1.250	1.783	3.38
-11024	-21024	-31024	1.375	1.625	1.375	1.820	3.22	-11224	-21224	-31224	1.375	1.625	1.375	1.908	3.50
-11026	-21026	-31026	1.500	1.750	1.500	1.945	3.34	-11226	-21226	-31226	1.500	1.750	1.500	2.033	3.63
-11028	-21028	-31028	1.625	1.875	1.625	2.070	3.47	-11228	-21228	-31228	1.625	1.875	1.625	2.158	3.75
-11030	-21030	-31030	1.750	2.000	1.750	2.195	3.59	-11230	-21230	-31230	1.750	2.000	1.750	2.283	3.88
-11032	-21032	-31032	1.875	2.125	1.875	2.320	3.72	-11232	-21232	-31232	1.875	2.125	1.875	2.408	4.00

(1) PART NUMBER EXAMPLE - M23469/4-11214

BASIC OR GENERAL SPECIFICATION
STYLE - BUTTON HEAD
GRIP IN 1/16" (7/8 ± 1/8)
DIAMETER IN 1/32" (3/8)
MATERIAL - ALUMINUM ALLOY


(A) FOR CHANGES SEE PAGES 1, 3, AND 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION SHEET

TYPE II - MULTIPLE LOCKING GROOVE PINS.

SWAGE-LOCKING FASTENER INSTALLATION WHICH SHOW HOW THE TYPE OF MATING COLLAR AFFECTS GRIP RANGE OF A PIN

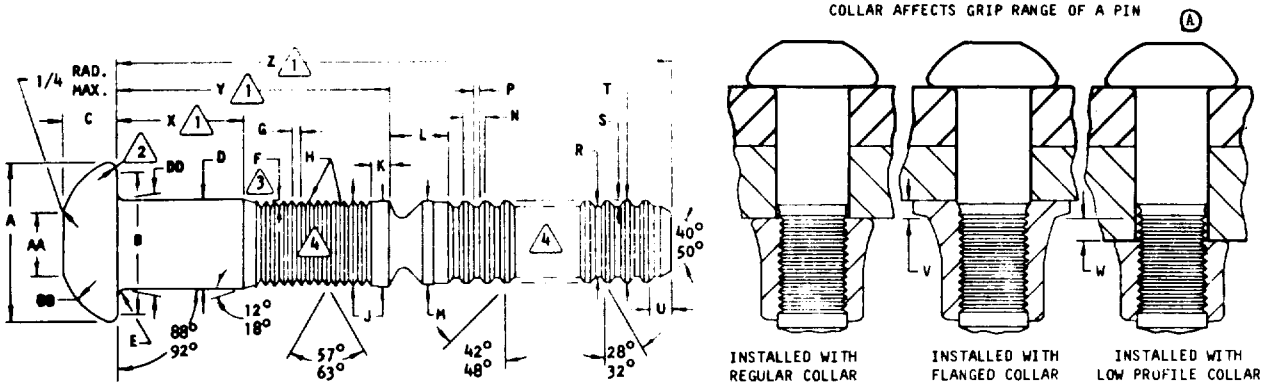

NOM DIA.	A DIA.	AA DIA.	B (5)	BB REF. RAD.	C	CC (6)	D DIA.	DD DIA. (7)	E RAD.	F	G PITCH	H RAD.	J DIA.	K MAX.	L MAX.
1/2	.938 .875	.360 .328	.828	.500	.302 .330	.030	.515 .493	.530	.021 .031	.025 .028	.039 .045	.002 .010	.495 .485	.094	.375
5/8	1.187 1.094	.485 .453	1.062	.609	.378 .415	.040	.642 .617	.675	.047 .062	.031 .035	.052 .058	.003 .013	.618 .608	.115	.375
3/4	1.438 1.328	.532 .500	1.250	.734	.455 .500	.047	.768 .741	.800	.047 .062	.036 .040	.059 .065	.003 .015	.740 .730	.135	.500
7/8	1.656 1.547	.641 .609	1.437	.844	.531 .578	.055	.895 .866	.938	.047 .062	.043 .048	.068 .076	.003 .017	.870 .860	.156	.625
1"	1.906 1.781	.766 .734	1.625	.969	.591 .640	.062	1.022 .990	1.063	.078 .093	.052 .058	.080 .088	.004 .020	.993 .983	.180	.625

NOM DIA.	M DIA.	N (8) PITCH	P	R DIA.	S	T MAX. DIA.	U MIN.	V (9) FLANGED COLLAR	W (10) LOW PROFILE COLLAR	HOLE PREPARATION DATA	
										SIZE DRILL	MAX. HOLE DIA.
1/2	.473 .449 (A)	.0615 .0635	.016 .018	.427 .423	.020 .023	.473	.062	.125	.140	17/32 (.531)	9/16
5/8	.615 .570	.0771 .0791	.020 .023	.530 .524	.026 .030	.590	.078	.156	.180	21/32 (.656)	11/16
3/4	.740 .682	.0927 .0947	.025 .028	.637 .631	.032 .037	.711	.094	.188	.215	25/32 (.781)	13/16
7/8	.860 .790	.1084 .1104	.029 .032	.746 .738	.036 .041	.828	.109	.218	.250	29/32 (.906)	15/16
1"	.980 .900	.124 .126	.032 .036	.857 .849	.041 .047	.951	.125	.250	.285	1 1/32 (1.031)	1 1/16

DIMENSIONS IN INCHES.
SHANK MUST BE STRAIGHT WITHIN .004 TOTAL INDICATOR READING (T.I.R.) PER INCH OF LENGTH.

(1) "X", "Y", AND "Z" SHOWN ON TABLE II.

(2) RADIUS IS NATURAL FLOW OF MATERIAL.

(3) INITIAL LOCKING GROOVE FORMED AT JUNCTURE OF ANGLE AND "D" BODY DIAMETER.

(4) DIMENSIONS INDICATED ON LOCKING GROOVE AND PULL GROOVES ARE TYPICAL.

(5) MINIMUM BEARING DIAMETER.

(6) CONICAL SURFACE OF HEAD TO "D" DIAMETER MUST BE CONCENTRIC WITHIN "CC" TOTAL INDICATOR READING (T.I.R.).

(7) MAXIMUM SEAM DIAMETER ALLOWABLE.

(8) ACCUMULATED PITCH TOLERANCE NOT TO EXCEED ±.002 ON ANY TEN CONSECUTIVE PULL GROOVES.

COLLAR: REGULAR HEIGHT - USE GRIP SHOWN ON TABLE II.

(9) FLANGED - ADD FLANGE THICKNESS "V" TO ACTUAL THICKNESS TO BE FASTENED TO DETERMINE "GRIP" TO BE USED IN SPECIFYING DASH NUMBER, TABLE II.

(10) LOW PROFILE - SUBTRACT "W" FROM ACTUAL THICKNESS TO BE FASTENED TO DETERMINE "GRIP" TO BE USED IN SPECIFYING DASH NUMBER, TABLE II.

(A) FOR CHANGES SEE PAGES 1, 3 AND 4

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION SHEET

TABLE II - MULTIPLE LOCKING GROOVE PINS.

DASH NUMBER IDENTIFICATION

M23469/4 [1]			1/2 DIAMETER					M23469/4 [1]			3/4 DIAMETER				
ALUM	CRES	CARBON STEEL	GRIP RANGE		X +.016 -.031	Y ±.020	Z +.00 -.26	ALUM	CRES	CARBON STEEL	GRIP RANGE		X +.016 -.031	Y ±.020	Z +.00 -.26
CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.				CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.			
-11604	-21604	-31604	.251	.500	.188	1.213	3.36	-12404	-22404	-32404	.251	.500	.188	1.518	4.34
-11608	-21608	-31608	.501	.750	.438	1.463	3.61	-12408	-22408	-32408	.501	.750	.438	1.768	4.59
-11612	-21612	-31612	.751	1.000	.688	1.713	3.86	-12412	-22412	-32412	.751	1.000	.688	2.018	4.84
-11616	-21616	-31616	1.001	1.250	.938	1.963	4.11	-12416	-22416	-32416	1.001	1.250	.938	2.268	5.09
-11620	-21620	-31620	1.251	1.500	1.188	2.213	4.36	-12420	-22420	-32420	1.251	1.500	1.188	2.518	5.34
-11624	-21624	-31624	1.501	1.750	1.438	2.463	4.61	-12424	-22424	-32424	1.501	1.750	1.438	2.768	5.59
-11628	-21628	-31628	1.751	2.000	1.688	2.713	4.86	-12428	-22428	-32428	1.751	2.000	1.688	3.018	5.84
-11632	-21632	-31632	2.001	2.250	1.938	2.963	5.11	-12432	-22432	-32432	2.001	2.250	1.938	3.268	6.09
-11636	-21636	-31636	2.251	2.500	2.188	3.213	5.36	-12436	-22436	-32436	2.251	2.500	2.188	3.518	6.34
-11640	-21640	-31640	2.501	2.750	2.438	3.463	5.61	-12440	-22440	-32440	2.501	2.750	2.438	3.768	6.59
-11644	-21644	-31644	2.751	3.000	2.688	3.713	5.86	-12444	-22444	-32444	2.751	3.000	2.688	4.018	6.84
-11648	-21648	-31648	3.001	3.250	2.938	3.963	6.11	-12448	-22448	-32448	3.001	3.250	2.938	4.268	7.09
-11652	-21652	-31652	3.251	3.500	3.188	4.213	6.36	-12452	-22452	-32452	3.251	3.500	3.188	4.518	7.34
-11656	-21656	-31656	3.501	3.750	3.438	4.463	6.61	-12456	-22456	-32456	3.501	3.750	3.438	4.768	7.59
-11660	-21660	-31660	3.751	4.000	3.688	4.713	6.86	-12460	-22460	-32460	3.751	4.000	3.688	5.018	7.84
-11664	-21664	-31664	4.001	4.250	3.938	4.963	7.11	-12464	-22464	-32464	4.001	4.250	3.938	5.268	8.09

M23469/4 [1]			5/8 DIAMETER					M23469/4 [1]			7/8 DIAMETER				
ALUM	CRES		GRIP RANGE		X +.016 -.031	Y (A) ±.020	Z (A) +.00 -.26	ALUM	CRES	CARBON STEEL	GRIP RANGE		X +.016 -.031	Y ±.020	Z +.00 -.26
CLASS 1	CLASS 2		MIN.	MAX.				CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.			
-12004	-22004		.251	.500	.188	1.363	3.78								
-12008	-22008		.501	.750	.438	1.613	4.03	-12808	-22808	-32808	.501	.750	.438	1.921	4.88
-12012	-22012		.751	1.000	.688	1.863	4.28	-12812	-22812	-32812	.751	1.000	.688	2.171	5.13
-12016	-22016		1.001	1.250	.938	2.113	4.53	-12816	-22816	-32816	1.001	1.250	.938	2.421	5.38
-12020	-22020		1.251	1.500	1.188	2.363	4.78	-12820	-22820	-32820	1.251	1.500	1.188	2.671	5.63
-12024	-22024		1.501	1.750	1.438	2.613	5.03	-12824	-22824	-32824	1.501	1.750	1.438	2.921	5.88
-12028	-22028		1.751	2.000	1.688	2.863	5.28	-12828	-22828	-32828	1.751	2.000	1.688	3.171	6.13
-12032	-22032		2.001	2.250	1.938	3.113	5.53	-12832	-22832	-32832	2.001	2.250	1.938	3.421	6.38
-12036	-22036		2.251	2.500	2.188	3.363	5.78	-12836	-22836	-32836	2.251	2.500	2.188	3.671	6.63
-12040	-22040		2.501	2.750	2.438	3.613	6.03	-12840	-22840	-32840	2.501	2.750	2.438	3.921	6.88
-12044	-22044		2.751	3.000	2.688	3.863	6.28	-12844	-22844	-32844	2.751	3.000	2.688	4.171	7.13
-12048	-22048		3.001	3.250	2.938	4.113	6.53	-12848	-22848	-32848	3.001	3.250	2.938	4.421	7.38
-12052	-22052		3.251	3.500	3.188	4.363	6.78	-12852	-22852	-32852	3.251	3.500	3.188	4.671	7.63
-12056	-22056		3.501	3.750	3.438	4.613	7.03	-12856	-22856	-32856	3.501	3.750	3.438	4.921	7.88
-12060	-22060		3.751	4.000	3.688	4.863	7.28	-12860	-22860	-32860	3.751	4.000	3.688	5.171	8.13
-12064	-22064		4.001	4.250	3.938	5.113	7.53	-12864	-22864	-32864	4.001	4.250	3.938	5.421	8.38

M23469/4 [1]			5/8 DIAMETER					M23469/4 [1]			1" DIAMETER				
		CARBON STEEL	GRIP RANGE		X +.016 -.031	Y ±.020	Z +.00 -.26	ALUM	CRES	CARBON STEEL	GRIP RANGE		X +.016 -.031	Y ±.020	Z +.00 -.26
		CLASS 3	MIN.	MAX.				CLASS 1	CLASS 2	CLASS 3	MIN.	MAX.			
		-32004	.251	.500	.188	1.433	3.84								
		-32008	.501	.750	.438	1.683	4.09	-13208	-23208	-33208	.501	.750	.438	2.073	5.57
		-32012	.751	1.000	.688	1.933	4.34	-13212	-23212	-33212	.751	1.000	.688	2.323	5.82
		-32016	1.001	1.250	.938	2.183	4.59	-13216	-23216	-33216	1.001	1.250	.938	2.573	6.07
		-32020	1.251	1.500	1.188	2.433	4.84	-13220	-23220	-33220	1.251	1.500	1.188	2.823	6.32
		-32024	1.501	1.750	1.438	2.683	5.09	-13224	-23224	-33224	1.501	1.750	1.438	3.073	6.57
		-32028	1.751	2.000	1.688	2.933	5.34	-13228	-23228	-33228	1.751	2.000	1.688	3.323	6.82
		-32032	2.001	2.250	1.938	3.183	5.59	-13232	-23232	-33232	2.001	2.250	1.938	3.573	7.07
		-32036	2.251	2.500	2.188	3.433	5.84	-13236	-23236	-33236	2.251	2.500	2.188	3.823	7.32
		-32040	2.501	2.750	2.438	3.683	6.09	-13240	-23240	-33240	2.501	2.750	2.438	4.073	7.57
		-32044	2.751	3.000	2.688	3.933	6.34	-13244	-23244	-33244	2.751	3.000	2.688	4.323	7.82
		-32048	3.001	3.250	2.938	4.183	6.59	-13248	-23248	-33248	3.001	3.250	2.938	4.573	8.07
		2052	3.251	3.500	3.188	4.433	6.84	-13252	-23252	-33252	3.251	3.500	3.188	4.823	8.32
		32056	3.501	3.750	3.438	4.683	7.09	-13256	-23256	-33256	3.501	3.750	3.438	5.073	8.57
		-32060	3.751	4.000	3.688	4.933	7.34	-13260	-23260	-33260	3.751	4.000	3.688	5.323	8.82
		-32064	4.001	4.250	3.938	5.183	7.59	-13264	-23264	-33264	4.001	4.250	3.938	5.573	9.07

[1] PART NUMBER EXAMPLE - M23469/4-11612

- BASIC OR GENERAL SPECIFICATION
- STYLE - BUTTON HEAD
- GRIP IN 1/16" (7/8 ±1/8)
- DIAMETER IN 1/32" (1/2)
- MATERIAL - ALUMINUM ALLOY

DIMENSIONS IN INCHES

Preparing activity:
Navy - SH
(Project 5320-N036Sh)

(A) FOR CHANGES SEE PAGES 1, 3 AND 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.