INCH-POUND
MIL-P-23469/5B(SH)
19 February 1988
SUPERSEDING
MIL-P-23469/5A(SHIPS)
31 May 1967

MILITARY SPECIFICATION SHEET

(B) PIN-RIVET, GROOVED, TRUSS HEAD; STRAIGHT SHANK, SIX LOCKING GROOVES AND MULTIPLE LOCKING GROOVES, ALUMINUM ALLOY, CORROSION-RESISTANT AND CARBON STEELS

(B) This specification sheet is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the pins described herein shall consist of this specification and the latest issue of MIL-P-23469.

Truss head, swage-locking pins shall be furnished in the following types and classes. Pins manufactured to this specification are intended for use with collars manufactured to MIL-P-23469.


Type I - Six locking grooves (see figure 1)
Type II - Multiple locking grooves (see figure 2)

Class 1 - Aluminum alloy
Class 2 - Corrosion resistant steel
Class 3 - Carbon steel
(B) Class 5 - Carbon steel high strength

(B) Denotes changes.

AMSC N/A FSC 5320
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

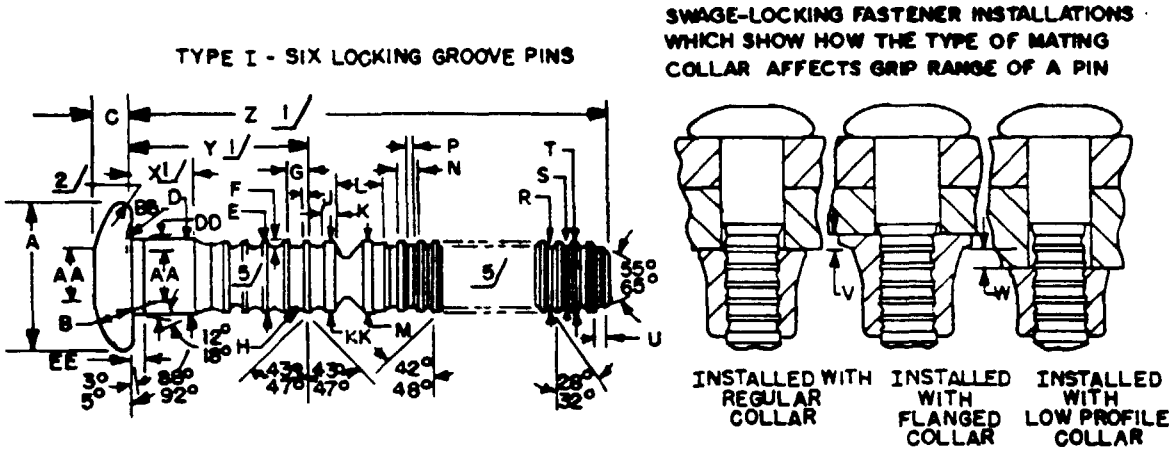

SH 13203040

Nom dia	A Dia	AA Dia	B Ref rad	BB Rad	C Class 1	C Class 2 Class 3 Class 5	CC 3/	D Dia	DD Dia 4/	E Dia	EE 4/	F	FF 6/	G Pitch	H Rad ref	J	K Max	KK Dia	L Max
3/16	.469 .406	.203 .173	.192	.015 .020	.078 .088	.078 .088	.015	.195 .191	.196	.1845 .1815	.047	.012 .014	.187	.041 .043	.013	.004 .006	.036	.1845 .1780	.250
1/4	.594 .531	.265 .235	.220	.015 .020	.108 .121	.103 .115	.015	.259 .254	.260	.2415 .2355	.063	.0155 .0175	.250	.054 .056	.018	.006 .008	.046	.2415 .2355	.250
5/16	.797 .703	.327 .297	.291	.015 .025	.143 .157	.127 .141	.020	.322 .317	.324	.3015 .2975	.078	.019 .021	.312	.068 .070	.024	.007 .009	.066	.3015 .2950	.250
3/8	.922 .828	.390 .360	.365	.020 .025	.184 .200	.152 .168	.020	.385 .380	.387	.369 .360	.094	.024 .028	.375	.082 .086	.026	.008 .012	.102	.369 .360	.375

See footnotes at end of table.

FIGURE 1. Type I - six locking grooves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

Nom dia.	M Dia	N 7/ Pitch	P	R Dia	S	T Max dia	U Min	V 9/ Flanged collar	W 10/ Low profile collar	Hole preparation data 8/ Size drill	Hole preparation data 8/ Max hole dia
3/16	.1835 .1720	.0307 .0317	.012 .014	.168 .164	.0045 .0065	.181	.047	.047	.094	No. 9 (.196)	13/64
1/4	.2405 .2250	.0463 .0473	.015 .017	.211 .207	.013 .015	.241	.063	.063	.125	Let. "G" (.261)	17/64
5/16	.3005 .2810	.0463 .0473	.015 .017	.267 .263	.013 .015	.297	.078	.078	.125	Let. "P" (.323)	21/64
3/8	.3665 .3410	.0463 .0473	.0185 .0205	.331 .327	.0065 .0095	.350	.094	.094	.156	Let. "W" (.386)	25/64

1/ "X", "Y", and "Z" shown in table I.
2/ Radius is natural flow of material.
3/ Conical surface of head to "D" body diameter shall be concentric within "CC" TIR.
4/ Shank taper permissible: "DD" maximum diameter; "EE" maximum length.
5/ Dimensions indicated on locking grooves and pull grooves are typical.
6/ Maximum depth of 0.0015 and maximum width of "FF" permissible underfill along "D" body diameter.
7/ Accumulated pitch tolerance not to exceed plus or minus 0.002 on any 10 consecutive pull grooves.
8/ For interference fit requirements, sheet hole size to be a maximum of 0.003 smaller than actual pin "D" body diameter.

Collar: Regular height - use grip shown in table I.

9/ Flanged - add flange thickness "V" to actual thickness to be fastened to determine "grip" to be used in specifying dash number, table I.
10/ Low profile - subtract "W" from actual thickness to be fastened to determine "grip" to be used in specifying dash number, table I.

NOTES:
1. MIL-P-23469/5B and MIL-P-23469/5A pins are interchangeable type for type, class for class, and size for size.
2. Dimensions are in inches.
(B) 3. 5/16 has 7 locking grooves.
4. Shank must be straight within 0.004 TIR per inch of length.

FIGURE 1. Type I - six locking grooves. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

TABLE I. Six locking grooves.

Dash number identification Ⓑ									Ⓑ								
M23469/5 1/			Carbon steel high strength	3/16 diameter					M23469/5 1/			Carbon steel high strength	1/4 diameter				
ALUM	CRES	Carbon steel		Grip range		X	Y	Z	ALUM	CRES	Carbon steel		Grip range		X	Y	Z
Class 1	Class 2	Class 3	Class 5	Min	Max	±.015	±.010	+.00 −.13	Class 1	Class 2	Class 3	Class 5	Min	Max	±.015	±.010	+.00 −.13
-10602	-20602	-30602	-50602	.062	.187	.062	.326	1.50	-10802	-20802	-30802	-50802	.062	.187	.062	.396	1.63
-10603	-20603	-30603	-50603	.125	.250	.125	.389	1.56	-10803	-20803	-30803	-50803	.125	.250	.125	.459	1.69
-10604	-20604	-30604	-50604	.187	.312	.187	.451	1.63	-10804	-20804	-30804	-50804	.187	.312	.187	.521	1.75
-10605	-20605	-30605	-50605	.250	.375	.250	.514	1.69	-10805	-20805	-30805	-50805	.250	.375	.250	.584	1.81
-10606	-20606	-30606	-50606	.312	.437	.312	.576	1.75	-10806	-20806	-30806	-50806	.312	.437	.312	.646	1.88
-10607	-20607	-30607	-50607	.375	.500	.375	.639	1.81	-10807	-20807	-30807	-50807	.375	.500	.375	.709	1.94
-10608	-20608	-30608	-50608	.437	.562	.437	.701	1.88	-10808	-20808	-30808	-50808	.437	.562	.437	.771	2.00
-10609	-20609	-30609	-50609	.500	.625	.500	.764	1.94	-10809	-20809	-30809	-50809	.500	.625	.500	.834	2.06
-10610	-20610	-30610	-50610	.562	.687	.562	.826	2.00	-10810	-20810	-30810	-50810	.562	.687	.562	.896	2.13
-10611	-20611	-30611	-50611	.625	.750	.625	.889	2.06	-10811	-20811	-30811	-50811	.625	.750	.625	.959	2.19
-10612	-20612	-30612	-50612	.687	.812	.687	.951	2.13	-10812	-20812	-30812	-50812	.687	.812	.687	1.021	2.25
-10613	-20613	-30613	-50613	.750	.875	.750	1.014	2.19	-10813	-20813	-30813	-50813	.750	.875	.750	1.084	2.31
-10614	-20614	-30614	-50614	.812	.937	.812	1.076	2.25	-10814	-20814	-30814	-50814	.812	.937	.812	1.146	2.38
-10615	-20615	-30615	-50615	.875	1.000	.875	1.139	2.31	-10815	-20815	-30815	-50815	.875	1.000	.875	1.209	2.44
-10616	-20616	-30616	-50616	.937	1.062	.937	1.201	2.38	-10816	-20816	-30816	-50816	.937	1.062	.937	1.271	2.50
-10617	-20617	-30617	-50617	1.000	1.125	1.000	1.264	2.44	-10817	-20817	-30817	-50817	1.000	1.125	1.000	1.334	2.56
-10618	-20618	-30618	-50618	1.062	1.187	1.062	1.326	2.50	-10818	-20818	-30818	-50818	1.062	1.187	1.062	1.396	2.63
-10619	-20619	-30619	-50619	1.125	1.250	1.125	1.389	2.56	-10819	-20819	-30819	-50819	1.125	1.250	1.125	1.459	2.69
-10620	-20620	-30620	-50620	1.187	1.312	1.187	1.451	2.63	-10820	-20820	-30820	-50820	1.187	1.312	1.187	1.521	2.75

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

TABLE I. Six locking grooves. - Continued

Ⓑ Dash number identification Ⓑ																
M23469/5 1/			Carbon steel high strength	3/16 diameter					M23469/5 1/			Carbon steel high strength	1/4 diameter				
ALUM	CRES	Carbon steel		Grip range		X	Y	Z	ALUM	CRES	Carbon steel		Grip range		X	Y	Z
Class 1	Class 2	Class 3	Class 5	Min	Max	±.015	±.010	+.00 −.13	Class 1	Class 2	Class 3	Class 5	Min	Max	±.015	±.010	+.00 −.13
-10621	-20621	-30621	-50621	1.250	1.375	1.250	1.514	2.69	-10821	-20821	-30821	-50821	1.250	1.375	1.250	1.584	2.81
-10622	-20622	-30622	-50622	1.312	1.437	1.312	1.576	2.75	-10822	-20822	-30822	-50822	1.312	1.437	1.312	1.646	2.88
-10623	-20623	-30623	-50623	1.375	1.500	1.375	1.639	2.81	-10823	-20823	-30823	-50823	1.375	1.500	1.375	1.709	2.94
-10624	-20624	-30624	-50624	1.437	1.562	1.437	1.701	2.88	-10824	-20824	-30824	-50824	1.437	1.562	1.437	1.771	3.00
-10625	-20625	-30625	-50625	1.500	1.625	1.500	1.764	2.94	-10825	-20825	-30825	-50825	1.500	1.625	1.500	1.834	3.06
-10626	-20626	-30626	-50626	1.562	1.687	1.562	1.826	3.00	-10826	-20826	-30826	-50826	1.562	1.687	1.562	1.896	3.13
-10627	-20627	-30627	-50627	1.625	1.750	1.625	1.889	3.06	-10827	-20827	-30827	-50827	1.625	1.750	1.625	1.959	3.19
-10628	-20628	-30628	-50628	1.687	1.812	1.687	1.951	3.13	-10828	-20828	-30828	-50828	1.687	1.812	1.687	2.021	3.25
-10629	-20629	-30629	-50629	1.750	1.875	1.750	2.014	3.19	-10829	-20829	-30829	-50829	1.750	1.875	1.750	2.084	3.31
-10630	-20630	-30630	-50630	1.812	1.937	1.812	2.076	3.25	-10830	-20830	-30830	-50830	1.812	1.937	1.812	2.146	3.38
-10631	-20631	-30631	-50631	1.875	2.000	1.875	2.139	3.31	-10831	-20831	-30831	-50831	1.875	2.000	1.875	2.209	3.44
-10632	-20632	-30632	-50632	1.937	2.062	1.937	2.201	3.38	-10832	-20832	-30832	-50832	1.937	2.062	1.937	2.271	3.50

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.


TABLE I. Six locking grooves. - Continued

Ⓑ Dash number identification Ⓑ																	
M23469/5 1/			Carbon steel high strength	5/16 diameter					M23469/5 1/			Carbon steel high strength	3/8 diameter				
ALUM	CRES	Carbon steel		Grip range		X	Y	Z	ALUM	CRES	Carbon steel		Grip range		X	Y	Z
Class 1	Class 2	Class 3	Class 5	Min	Max	±.015	±.010 Ⓑ	+.00 −.13 Ⓑ	Class 1	Class 2	Class 3	Class 5	Min	Max	±.015	±.010	+.00 −.13
-11004	-21004	-31004	-51004	.125	.375	.125	.632	2.03	-11204	-21204	-31204	-51204	.125	.375	.125	.658	2.25
-11006	-21006	-31006	-51006	.250	.500	.250	.757	2.15	-11206	-21206	-31206	-51206	.250	.500	.250	.783	2.38
-11008	-21008	-31008	-51008	.375	.625	.375	.882	2.28	-11208	-21208	-31208	-51208	.375	.625	.375	.908	2.50
-11010	-21010	-31010	-51010	.500	.750	.500	1.01	2.40	-11210	-21210	-31210	-51210	.500	.750	.500	1.033	2.63
-11012	-21012	-31012	-51012	.625	.875	.625	1.13	2.53	-11212	-21212	-31212	-51212	.625	.875	.625	1.158	2.75
-11014	-21014	-31014	-51014	.750	1.000	.750	1.26	2.65	-11214	-21214	-31214	-51214	.750	1.000	.750	1.283	2.88
-11016	-21016	-31016	-51016	.875	1.125	.875	1.38	2.78	-11216	-21216	-31216	-51216	.875	1.125	.875	1.408	3.00
-11018	-21018	-31018	-51018	1.000	1.250	1.000	1.51	2.90	-11218	-21218	-31218	-51218	1.000	1.250	1.000	1.533	3.13
-11020	-21020	-31020	-51020	1.125	1.375	1.125	1.63	3.03	-11220	-21220	-31220	-51220	1.125	1.375	1.125	1.658	3.25
-11022	-21022	-31022	-51022	1.250	1.500	1.250	1.76	3.15	-11222	-21222	-31222	-51222	1.250	1.500	1.250	1.783	3.38
-11024	-21024	-31024	-51024	1.375	1.625	1.375	1.88	3.28	-11224	-21224	-31224	-51224	1.375	1.625	1.375	1.908	3.50
-11026	-21026	-31026	-51026	1.500	1.750	1.500	2.01	3.40	-11226	-21226	-31226	-51226	1.500	1.750	1.500	2.033	3.63
-11028	-21028	-31028	-51028	1.625	1.875	1.625	2.13	3.53	-11228	-21228	-31228	-51228	1.625	1.875	1.625	2.158	3.75
-11030	-21030	-31030	-51030	1.750	2.000	1.750	2.26	3.65	-11230	-21230	-31230	-51230	1.750	2.000	1.750	2.283	3.88
-11032	-21032	-31032	-51032	1.875	2.125	1.875	2.38	3.78	-11232	-21232	-31232	-51232	1.875	2.125	1.875	2.408	4.00

1/ Part number example - M23469/5-11214

- Basic or general specification
- Style - truss head
- Grip in 1/16 inch (7/8 + 1/8)
- Diameter in 1/32 inch (3/8)
- Material - aluminum alloy

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

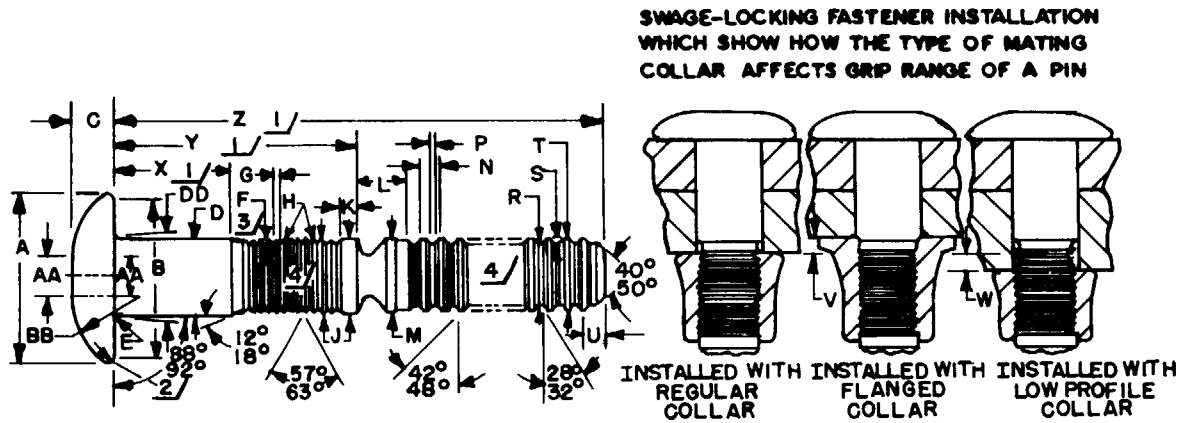

SH 13203041

Nom dia	A Dia	AA Dia	B 5/	BB Ref Rad	C	CC 6/	D Dia	DD Dia 7/	E Rad	F	G Pitch	H Rad	J Dia	K Max	L Max
1/2	1.138 1.075	.266 .234	1.062	.712	.225 .250	.030	.515 .493	.530	.021 .031	.025 .028	.039 .045	.002 .010	.495 .485	.094	.375
5/8	1.343 1.280	.328 .296	1.312	.820	.288 .313	.040	.642 .617	.675	.047 .062	.031 .035	.052 .058	.003 .013	.618 .608	.115	.375
3/4	1.608 1.545	.391 .359	1.562	.984	.340 .375	.047	.768 .741	.800	.047 .062	.036 .040	.059 .065	.003 .015	.740 .730	.135	.500
* 7/8	1.915 1.790	.453 .421	1.875	1.148	.395 .438	.055	.895 .866	.938	.047 .062	.043 .048	.068 .076	.003 .017	.870 .860	.156	.625
* 1	2.180 2.055	.516 .484	2.000	1.268	.452 .500	.062	1.022 .990	1.063	.078 .093	.052 .058	.080 .088	.004 .020	.993 .983	.180	.625

See footnotes at end of table.

FIGURE 2. Type II - multiple locking grooves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

	Nom dia	M Dia	N 8/ Pitch	P	R Dia	S	T Max dia	U Min	V 9/ Flanged collar	W 10/ Low profile collar	Hole preparation data	
											Size drill	Max hole dia
	1/2	.473 .449	.0615 .0635	.016 .018	.427 .423	.020 .023	.473	.062	.125	.140	17/32 (.531)	9/16
	5/8	.615 .570	.0771 .0791	.020 .023	.530 .524	.026 .030	.590	.078	.156	.180	21/32 (.656)	11/16
	3/4	.740 .682	.0927 .0947	.025 .028	.637 .631	.032 .037	.711	.094	.188	.215	25/32 (.781)	13/16
*	7/8	.860 .790	.1084 .1104	.029 .032	.746 .738	.036 .041	.828	.109	.218	.250	29/32 (.906)	15/16
*	1	.980 .900	.124 .126	.032 .036	.857 .849	.041 .047	.951	.125	.250	.285	1-1/32 (1.031)	1-1/16

NOTE:
1. Shank shall be straight within 0.004 TIR per inch of length.

1/ "X", "Y", and "Z" shown in table II.
2/ Radius is natural flow of material.
3/ Initial locking groove formed at juncture of angle and "D" body diameter.
4/ Dimensions indicated on locking grooves and pull grooves are typical.
5/ Minimum bearing diameter.
6/ Conical surface of head to "D" diameter shall be concentric within "CC" TIR.
7/ Maximum seam diameter allowable.
8/ Accumulated pitch tolerance not to exceed plus or minus 0.002 on any 10 consecutive pull grooves.

Collar: Regular height - use grip shown in table II.

9/ Flanged - add flange thickness "V" to actual thickness to be fastened to determine "grip" to be used in specifying dash number, table II.
10/ Low profile - subtract "W" from actual thickness to be fastened to determine "grip" to be used in specifying dash number, table II.

(B) * 7/8 and 1 inch not available in ALUM and CRES.

FIGURE 2. Type II - multiple locking grooves. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-01-19T17:00Z
Check the source to verify that this is the current version before use.

TABLE II. Multiple locking grooves.

Dash number identification																	
M23469/5 1/			Carbon steel high strength	1/2 diameter					M23469/5 1/			Carbon steel high strength	3/4 diameter				
ALUM	CRES	Carbon steel		Grip range		X	Y	Z	ALUM	CRES	Carbon steel		Grip range		X	Y	Z
Class 1	Class 2	Class 3	Class 5	Min	Max	+.016 -.031	±.020	+.00 -.26	Class 1	Class 2	Class 3	Class 5	Min	Max	+.016 -.031	±.020	+.0 -.26
-11604	-21604	-31604	-51604	.251	.500	.188	1.213	3.36	-12404	-22404	-32404	-52404	.251	.500	.188	1.518	4.34
-11608	-21608	-31608	-51608	.501	.750	.438	1.463	3.61	-12408	-22408	-32408	-52408	.501	.750	.438	1.768	4.59
-11612	-21612	-31612	-51612	.751	1.000	.688	1.713	3.86	-12412	-22412	-32412	-52412	.751	1.000	.688	2.018	4.84
-11616	-21616	-31616	-51616	1.001	1.250	.938	1.963	4.11	-12416	-22416	-32416	-52416	1.001	1.250	.938	2.268	5.09
-11620	-21620	-31620	-51620	1.251	1.500	1.188	2.213	4.36	-12420	-22420	-32420	-52420	1.251	1.500	1.188	2.518	5.34
-11624	-21624	-31624	-51624	1.501	1.750	1.438	2.463	4.61	-12424	-22424	-32424	-52424	1.501	1.750	1.438	2.768	5.59
-11628	-21628	-31628	-51628	1.751	2.000	1.688	2.713	4.86	-12428	-22428	-32428	-52428	1.751	2.000	1.688	3.018	5.84
-11632	-21632	-31632	-51632	2.001	2.250	1.938	2.963	5.11	-12432	-22432	-32432	-52432	2.001	2.250	1.938	3.268	6.0[9]
-11636	-21636	-31636	-51636	2.251	2.500	2.188	3.213	5.36	-12436	-22436	-32436	-52436	2.251	2.500	2.188	3.518	6.34
-11640	-21640	-31640	-51640	2.501	2.750	2.438	3.463	5.61	-12440	-22440	-32440	-52440	2.501	2.750	2.438	3.768	6.59
-11644	-21644	-31644	-51644	2.751	3.000	2.688	3.713	5.86	-12444	-22444	-32444	-52444	2.751	3.000	2.688	4.018	6.84
-11648	-21648	-31648	-51648	3.001	3.250	2.938	3.963	6.11	-12448	-22448	-32448	-52448	3.001	3.250	2.938	4.268	7.09
-11652	-21652	-31652	-51652	3.251	3.500	3.188	4.213	6.36	-12452	-22452	-32452	-52452	3.251	3.500	3.188	4.518	7.34
-11656	-21656	-31656	-51656	3.501	3.750	3.438	4.463	6.61	-12456	-22456	-32456	-52456	3.501	3.750	3.438	4.768	7.59
-11660	-21660	-31660	-51660	3.751	4.000	3.688	4.713	6.86	-12460	-22460	-32460	-52460	3.751	4.000	3.688	5.018	7.84
-11664	-21664	-31664	-51664	4.001	4.250	3.938	4.963	7.11	-12464	-22464	-32464	-52464	4.001	4.250	3.938	5.268	8.09

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

TABLE II. Multiple locking grooves. - Continued

Dash number identification																	
M23469/5 1/			Carbon steel high strength	5/8 diameter					M23469/5 1/			Carbon steel high strength	7/8 diameter				
ALUM	CRES			Grip range		X	Y Ⓑ	Z Ⓑ	ALUM	CRES	Carbon steel		Grip range		X	Y	Z
Class 1	Class 2		Class 5	Min	Max	+.016 -.031	±.020	+.00 -.26	Class 1	Class 2	Class 3	Class 5	Min	Max	+.016 -.031	±.020	+.0 -.26
-12004	-22004		-52004	.251	.500	.188	1.363	3.78									
-12008	-22008		-52008	.501	.750	.438	1.613	4.03	-12808	-22808	-32808	-52808	.501	.750	.438	1.921	4.88
-12012	-22012		-52012	.751	1.000	.688	1.863	4.28	-12812	-22812	-32812	-52812	.751	1.000	.688	2.171	5.13
-12016	-22016		-52016	1.001	1.250	.938	2.113	4.53	-12816	-22816	-32816	-52816	1.001	1.250	.938	2.421	5.38
-12020	-22020		-52020	1.251	1.500	1.188	2.363	4.78	-12820	-22820	-32820	-52820	1.251	1.500	1.188	2.671	5.63
-12024	-22024		-52024	1.501	1.750	1.438	2.613	5.03	-12824	-22824	-32824	-52824	1.501	1.750	1.438	2.921	5.88
-12028	-22028		-52028	1.751	2.000	1.688	2.863	5.28	-12828	-22828	-32828	-52828	1.751	2.000	1.688	3.171	6.13
-12032	-22032		-52032	2.001	2.250	1.938	3.113	5.53	-12832	-22832	-32832	-52832	2.001	2.250	1.938	3.421	6.38
-12036	-22036		-52036	2.251	2.500	2.188	3.363	5.78	-12836	-22836	-32836	-52836	2.251	2.500	2.188	3.671	6.63
-12040	-22040		-52040	2.501	2.750	2.438	3.613	6.03	-12840	-22840	-32840	-52840	2.501	2.750	2.438	3.921	6.88
-12044	-22044		-52044	2.751	3.000	2.688	3.863	6.28	-12844	-22844	-32844	-52844	2.751	3.000	2.688	4.171	7.13
-12048	-22048		-52048	3.001	3.250	2.938	4.113	6.53	-12848	-22848	-32848	-52848	3.001	3.250	2.938	4.421	7.38
-12052	-22052		-52052	3.251	3.500	3.188	4.363	6.78	-12852	-22852	-32852	-52852	3.251	3.500	3.188	4.671	7.63
-12056	-22056		-52056	3.501	3.750	3.438	4.613	7.03	-12856	-22856	-32856	-52856	3.501	3.750	3.438	4.921	7.88
-12060	-22060		-52060	3.751	4.000	3.688	4.863	7.28	-12860	-22860	-32860	-52860	3.751	4.000	3.688	5.171	8.13
-12064	-22064		-52064	4.001	4.250	3.938	5.113	7.53	-12864	-22864	-32864	-52864	4.001	4.250	3.938	5.421	8.38

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.


TABLE II. Multiple locking grooves. - Continued

Dash number identification																	
M23469/5 1/				5/8 diameter					M23469/5 1/			Carbon steel high strength	1" diameter				
		Carbon steel		Grip range		X	Y	Z			Carbon steel		Grip range		X	Y	Z
		Class 3		Min	Max	+.016 −.031	±.020	+.00 −.26			Class 3	Class 5	Min	Max	+.016 −.031	±.020	+.0 −.26
		-32004		.251	.500	.188	1.433	3.84									
		-32008		.501	.750	.438	1.683	4.09			-33208	-53208	.501	.750	.438	2.073	5.57
		-32012		.751	1.000	.688	1.933	4.34			-33212	-53212	.751	1.000	.688	2.323	5.82
		-32016		1.001	1.250	.938	2.183	4.59			-33216	-53216	1.001	1.250	.938	2.573	6.07
		-32020		1.251	1.500	1.188	2.433	4.84			-33220	-53220	1.251	1.500	1.188	2.823	6.32
		-32024		1.501	1.750	1.438	2.683	5.09			-33224	-53224	1.501	1.750	1.438	3.073	6.57
		-32028		1.751	2.000	1.688	2.933	5.34			-33228	-53228	1.751	2.000	1.688	3.323	6.82
		-32032		2.001	2.250	1.938	3.183	5.59			-33232	-53232	2.001	2.250	1.938	3.573	7.07
		-32036		2.251	2.500	2.188	3.433	5.84			-33236	-53236	2.251	2.500	2.188	3.823	7.32
		-32040		2.501	2.750	2.438	3.683	6.09			-33240	-53240	2.501	2.750	2.438	4.073	7.57
		-32044		2.751	3.000	2.688	3.933	6.34			-33244	-53244	2.751	3.000	2.688	4.323	7.82
		-32048		3.001	3.250	2.938	4.183	6.59			-33248	-53248	3.001	3.250	2.938	4.573	8.07
		-32052		3.251	3.500	3.188	4.433	6.84			-33252	-53252	3.251	3.500	3.188	4.823	8.32
		-32056		3.501	3.750	3.438	4.683	7.09			-33256	-53256	3.501	3.750	3.438	5.073	8.57
		-32060		3.751	4.000	3.688	4.933	7.34			-33260	-53260	3.751	4.000	3.688	5.323	8.82
		-32064		4.001	4.250	3.948	5.183	7.59			-33264	-53264	4.001	4.250	3.938	5.573	9.07

See footnote at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.

1/ Part number example - M23469/5-11614

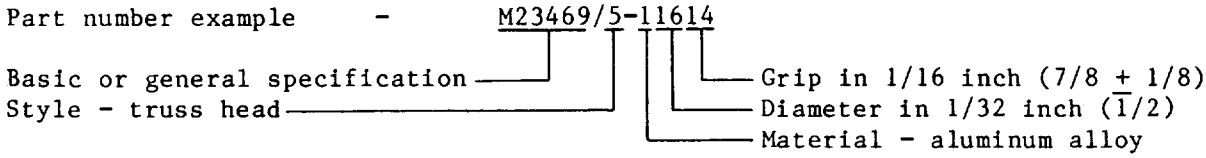

Preparing activity:
Navy - SH
(Project 5320-N024-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:00Z
Check the source to verify that this is the current version before use.