
INCH-POUND
MIL-C-55302/141B
17 November 1988
SUPERSEDING
MIL-C-55302/141A
18 December 1984

MILITARY SPECIFICATION SHEET


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PLUG WITH PIN CONTACTS, 3 KEYING PINS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

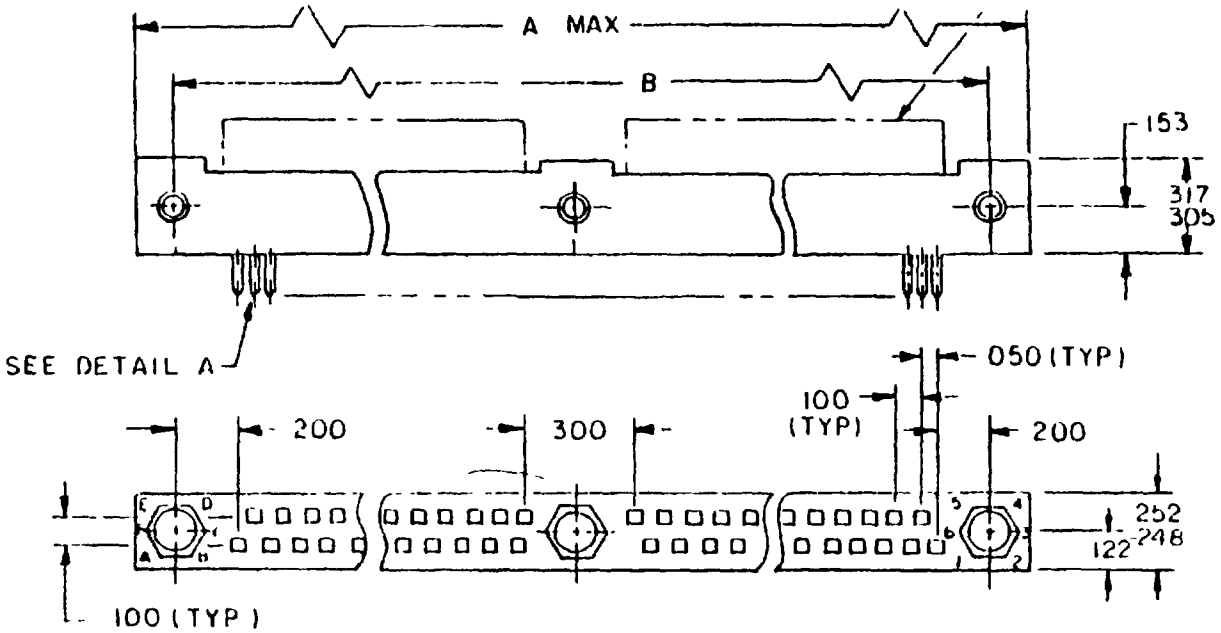

Inches	mm	Inches	mm	Inches	mm
.004	0.10	.050	1.27	.200	5.08
.008	0.20	.100	2.54	.248	6.30
.012	0.30	.122	3.10	.252	6.40
.020	0.51	.142	3.61	.300	7.62
.0229	0.582	.153	3.89	.305	7.75
.0244	0.620	.189	4.80	.317	8.05

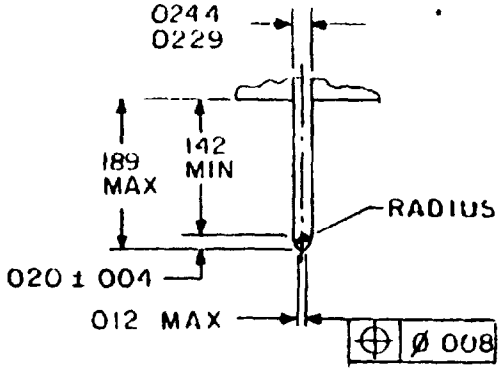

DETAIL A


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 005 (0.13 mm).

FIGURE 1 Connector, receptacle (.100 inch spacing).


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

TABLE I. Arrangements and characteristics.


Contact arrangement	No of contacts	Dimensions (inches) A Max	Dimensions (inches) B ±.006
M55302/141A	72	4.516 (114.70)	4.200 (106.68)
M55302/141B	84	5.114 (129 90)	4 800 (121.92)
M55302/141C	96	5.717 (145.20)	5.400 (137 16)

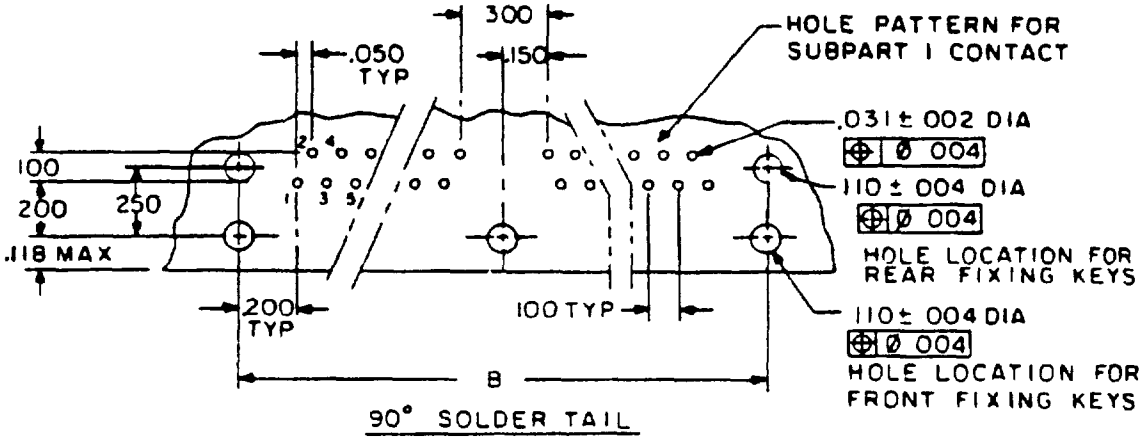

90° SOLDER TAIL

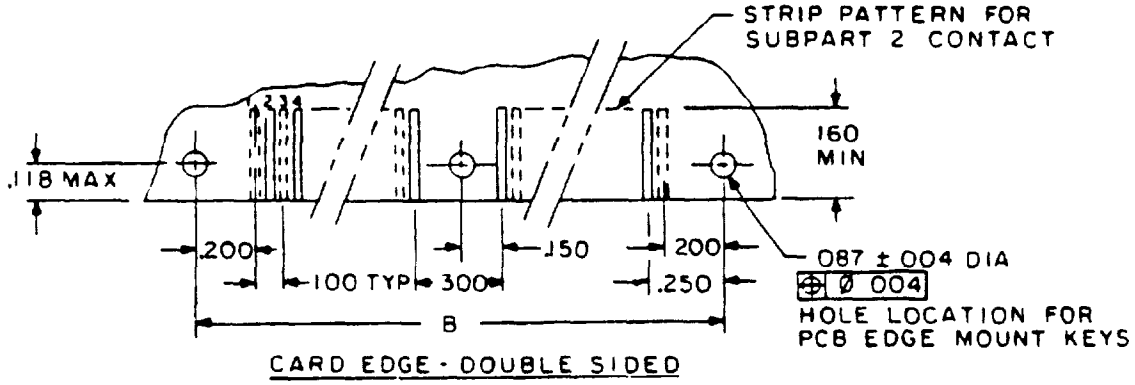

CARD EDGE - DOUBLE SIDED

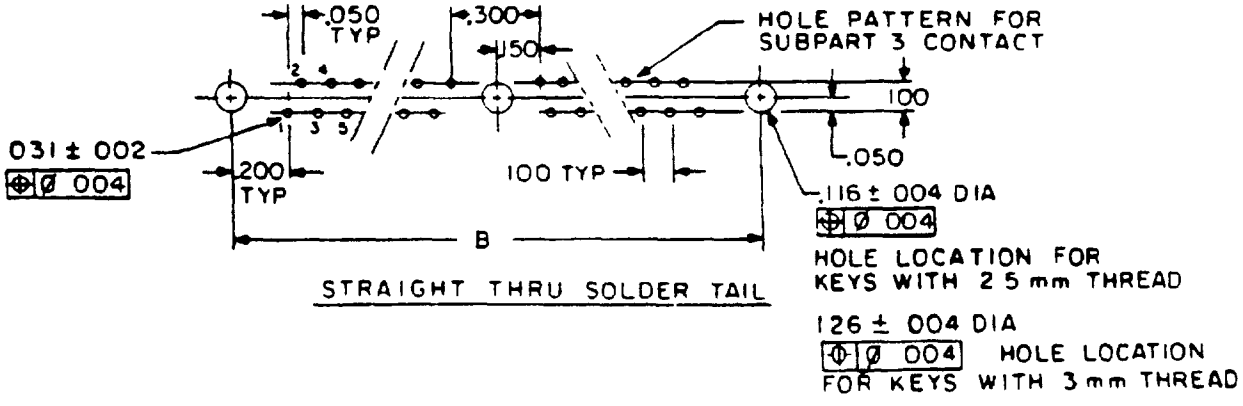

STRAIGHT THRU SOLDER TAIL

FIGURE 2 Recommended hole patterns


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Inches	mm
.002	0.05
.004	0.10
.031	0.79
.050	1.27
.087	2.21
.100	2.54
.110	2.79
.116	2.95
.118	3.00
.126	3.20
.150	3.81
.160	4.06
.200	5.08
.250	6.35
.300	7.62


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses.

FIGURE 2. Recommended hole patterns - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.



Part number
M55302/141A




Part number
M55302/141B



Part number
M55302/141C

FIGURE 3 Contact arrangements and keying arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

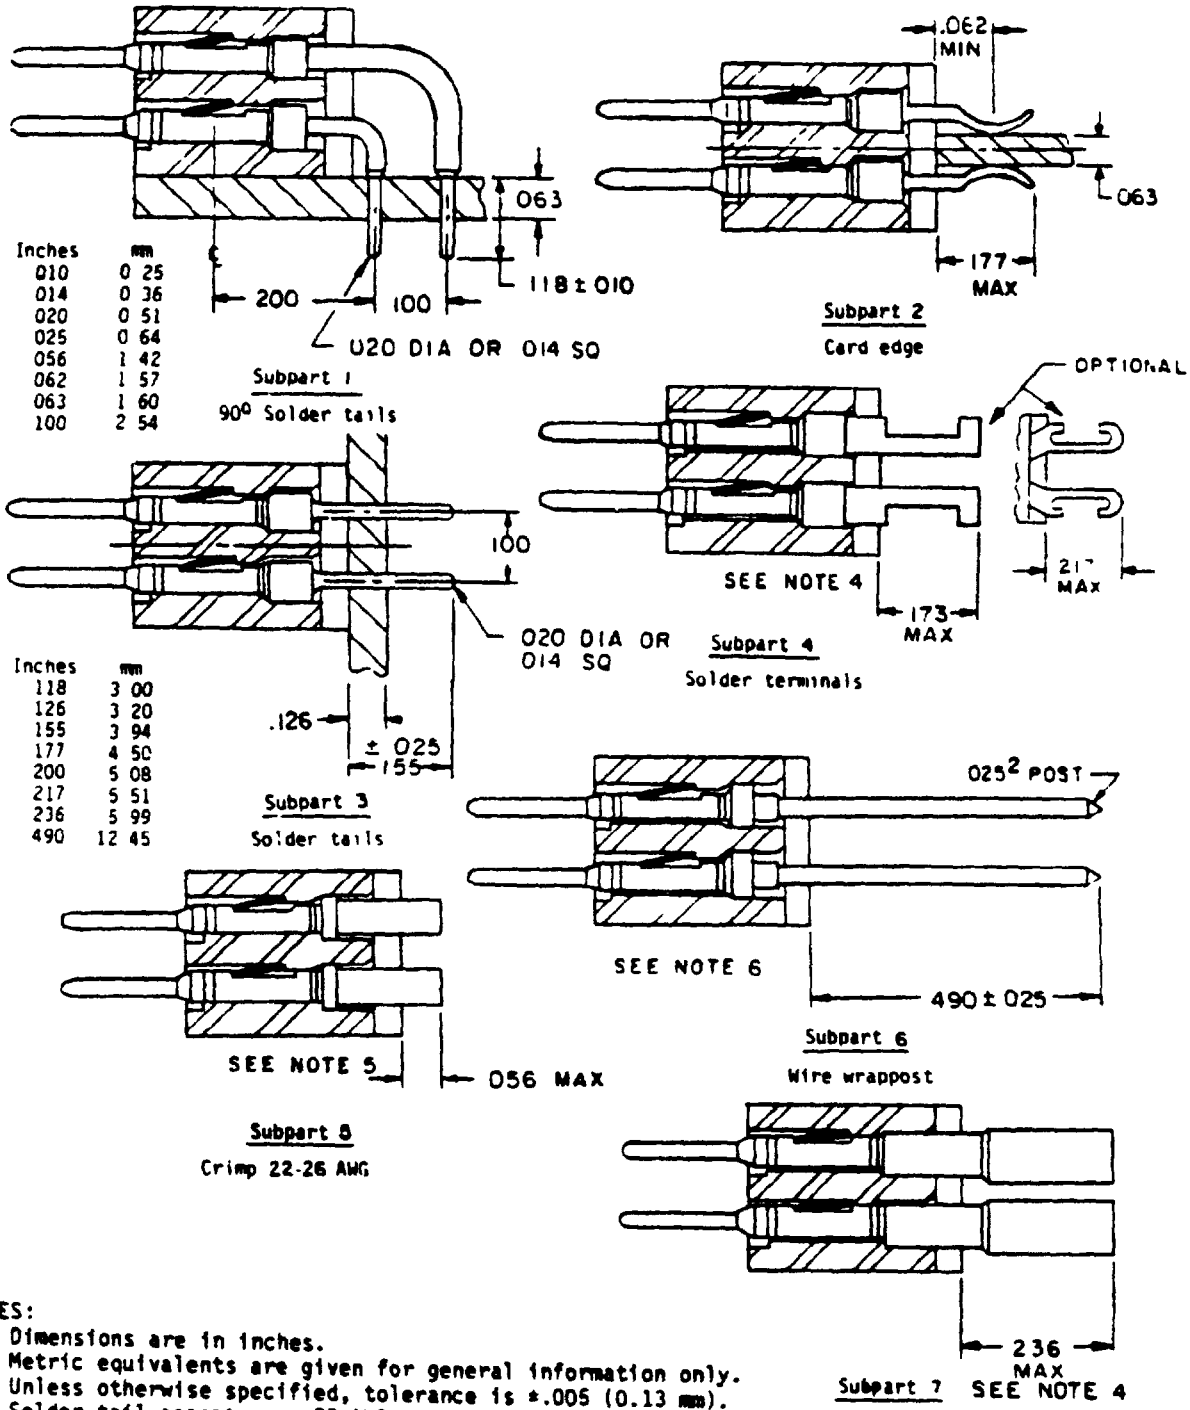


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Solder tail accepts no. 22 AWG wire.
5. Crimp contact accepts no. 22-26 AWG wire.
6. Contact with .025 inch^2 (0.64 mm^2) wrappost in accordance with MIL-STD-1130.

FIGURE 4. Connector terminations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

72 AND 84 CONTACTS

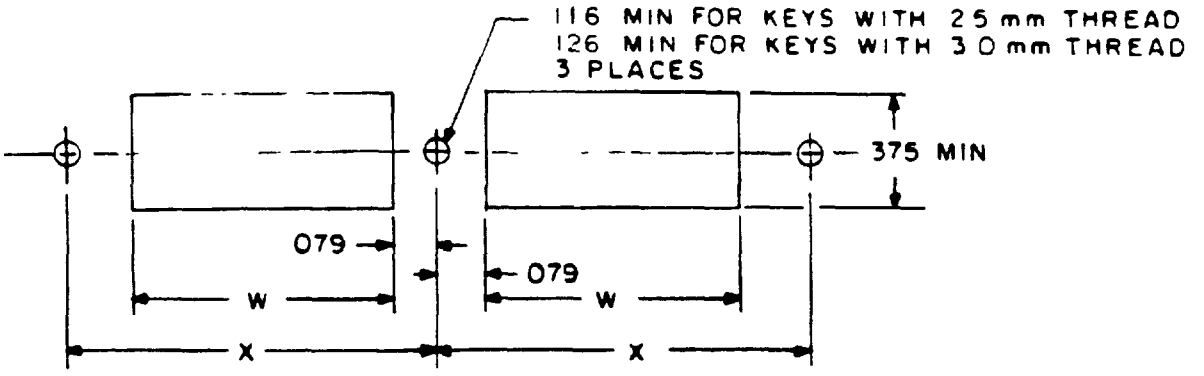

FIXED MOUNT

72, 84, AND 96 CONTACTS

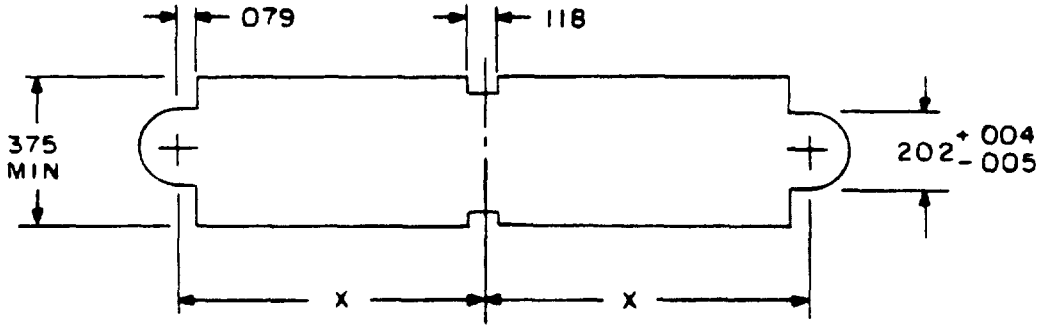

FLOATING MOUNT

Inches	mm	Inches	mm
.004	0.10	.375	9.53
.005	0.13	1.93	49.02
.079	2.01	2.10	53.34
.106	2.69	2.23	56.64
.118	3.00	2.40	60.96
.126	3.20	2.53	64.26
.202	5.13	2.70	68.58

No. of contacts	72	84	96
W min	1.93	2.23	2.53
X	2.10	2.40	2.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Floating mount panel thickness .085 (2.15 mm) maximum.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 5 and table I.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum for each contact.

Contact engagement: 0.7 ounce minimum, 3.6 ounces maximum.

Contact separation: 0.7 ounce minimum, 3.6 ounces maximum.

Contact resistance: The contact resistance shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum: 3.0 amperes at 25°C.

Keying pin: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed in accordance with M55302/154. Connectors are supplied with hex pins in the "1" and "A" positions, except for 1/4-turn locking styles, which are keyed in "F" and "6" positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Crimping tools:

Basic tool: M22520/2-01.

Positioner: M22520/2-36.

Removal tool (for crimp contacts): See M81969/40-01.

Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154, table I, plug (center post is unpolarized).

Mating connectors: Shall conform to MIL-C-55302/143.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

M55302/141	*	*	N	1	*

Specification sheet number
Plug with pin contacts

Contact arrangement
(see figure 3)

Contact type - 3.0 amperes
(see figure 4)

Contact type - Coaxial
N - not applicable

Indexing type
1 - Hexagon post (36 positions)

Mounting hardware
(see MIL-C-55302/154)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA -ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3652-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.