INCH-POUND


MIL-I-49466/2
2 April 1990
SUPERSEDING
MIL-M-38527/8 (IN PART)
7 September, 1984

MILITARY SPECIFICATION SHEET


INSULATOR; DISKS, PLATES, AND WASHERS SILICON RUBBER, FIBERGLASS REINFORCED .010 and .015 INCH THICK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the insulators described herein shall consist of this specification and the latest issue of MIL-I-49466.

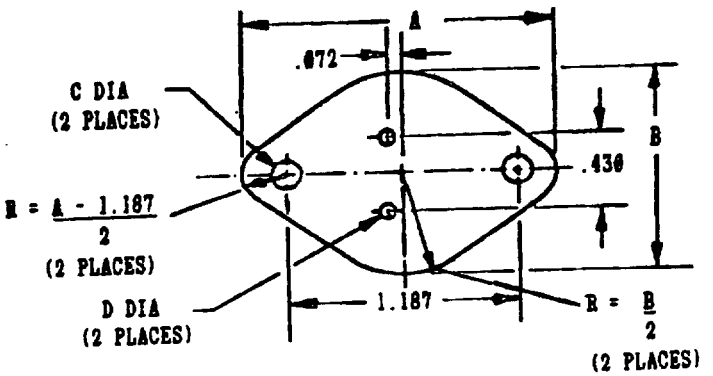

TO-3
Configuration A - Dash nos. 001R thru 025R

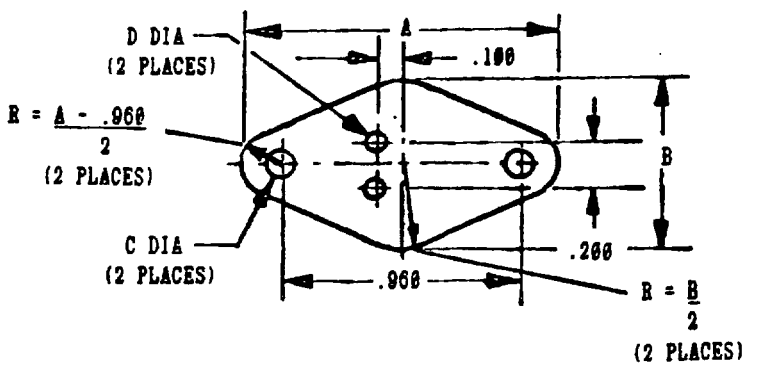


Inches	mm
.072	1.83
.100	2.54
.200	5.08
.430	10.92
.960	24.38
1.187	30.15

TO-66
Configuration B - Dash nos. 026R thru 033R

FIGURE 1. Insulator, Plates.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

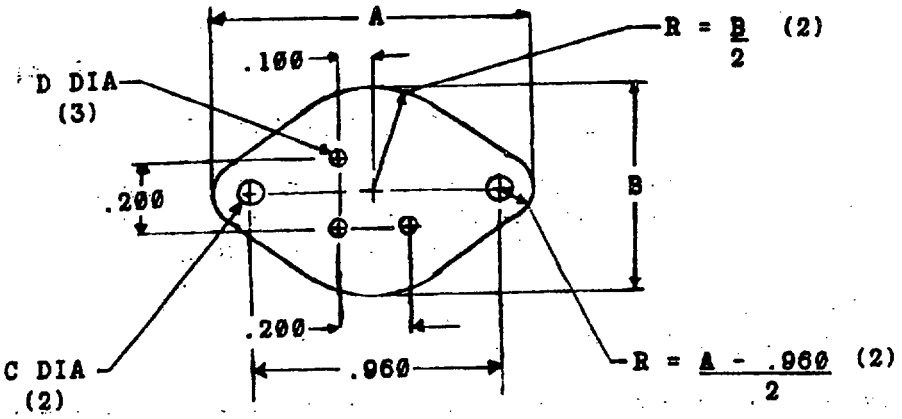

3 Lead TO-66

Configuration C
Dash 034R thru 035R

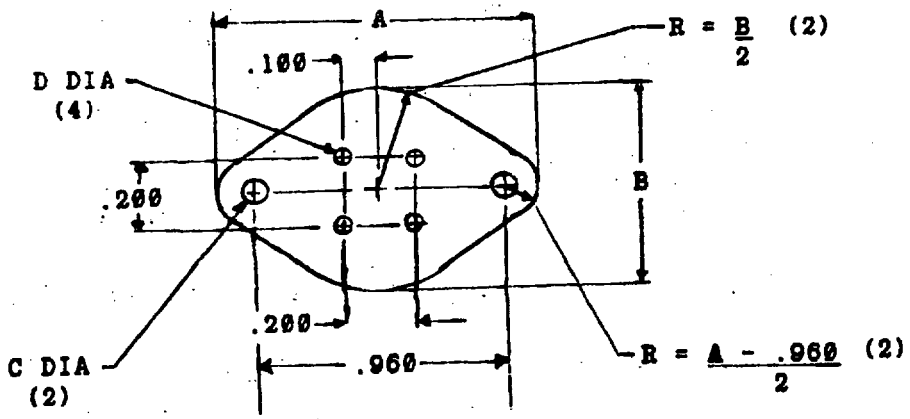


4 Lead TO-66

Configuration D
Dash 036R thru 037R

Inches	mm
.100	2.54
.200	5.08
.960	24.38


FIGURE 1. Insulator, Plates. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

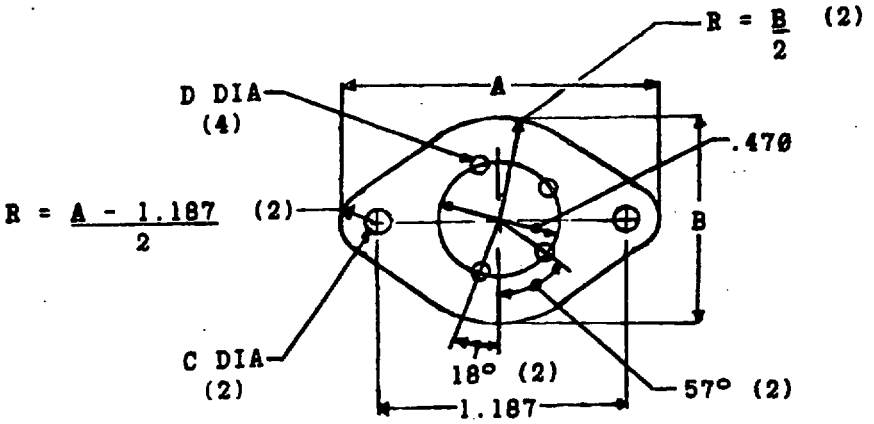

4 Lead TO-3

Configuration E
Dash 038R thru 039R

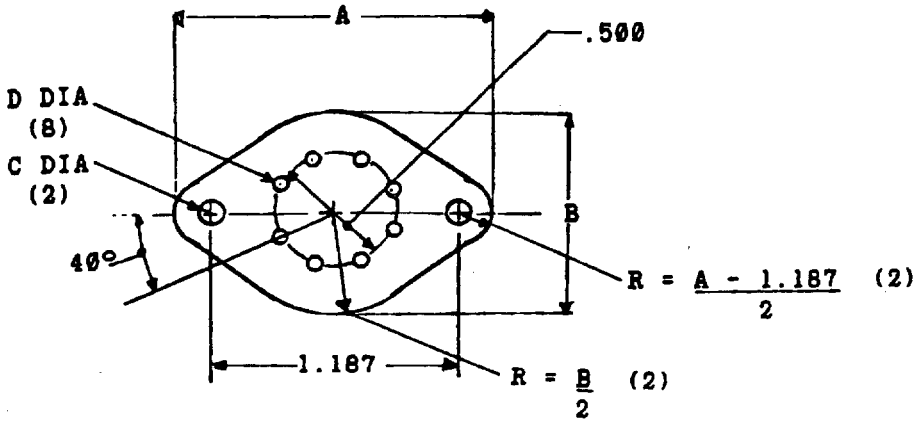

8 Lead TO-3

Configuration F
Dash 040R thru 041R

Inches	mm
.430	10.92
.470	11.94
.500	12.70
1.187	30.15

FIGURE 1. Insulator, Plates. - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

Part Number M49466/02- Material Grade 1/ and thickness			Dimensions (mm in parentheses)				
I .010 (.25)	II .010 (.25)	III .015 (.38)	A	B	C	D	Config-uration
001R	002R		1.563 (39.70)	1.050 (26.67)	.140 (3.56)	.080 (2.03)	A
003R	004R	005R	1.563 (39.70)	1.050 (26.67)	.140 (3.56)	.140 (3.56)	A
006R	007R	008R	1.593 (40.46)	1.100 (27.94)	.156 (3.96)	.062 (1.57)	A
009R	010R		1.650 (41.90)	1.140 (28.96)	.122 (3.10)	.062 (1.57)	A
011R	012R		1.650 (41.91(	1.140 (28.96)	.140 (3.56)	.046 (1.17)	A
013R	014R	015R	1.650 (41.91)	1.140 (28.96)	.140 (3.56)	.093 (2.36)	A
016R	017R	018R	1.700 (43.18)	1.187 (30.15)	.156 (3.56)	.062 (1.57)	A
019R	020R	021R	1.730 (43.94)	1.250 (31.75)	.156 (3.96)	.062 (1.57)	A
022R	023R		1.780 (45.21)	1.250 (31.75)	.140 (3.56)	.093 (2.36)	A
024R	025R		1.780 (45.21)	1.250 (31.75)	.165 (4.19)	.093 (2.36)	A
026R	027R	028R	1.250 (31.75)	.700 (17.78)	.140 (3.56)	.062 (1.57)	B
029R	030R		1.312 (33.32)	.762 (19.35)	.140 (3.56)	.062 (1.57)	B
031R	032R	033R	1.375 (34.92)	.825 (20.96)	.140 (3.56)	.062 (1.57)	B
034R	035R		1.275 (32.38)	.750 (19.05)	.156 (3.96)	.100 (2.54)	C
036R	037R		1.312 (33.32)	.762 (19.35)	.140 (3.56)	.062 (1.57)	D
038R	039R		1.563 (39.70)	1.050 (26.67)	.156 (3.96)	.062 (1.57)	E
040R	041R		1.650 (41.91)	1.187 (30.15)	.156 (3.96)	.062 (1.57)	F


1/ See requirements (thermal impedance)

FIGURE 1. Insulators, Plates. - Configuration A thru F - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

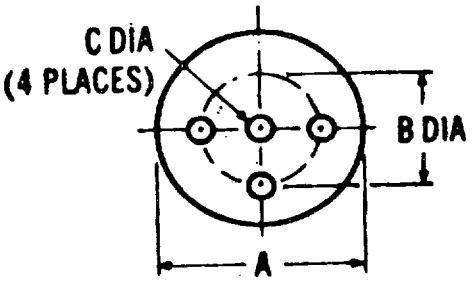

Configuration G.

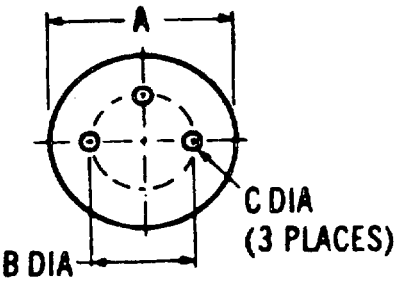

Configuration H.

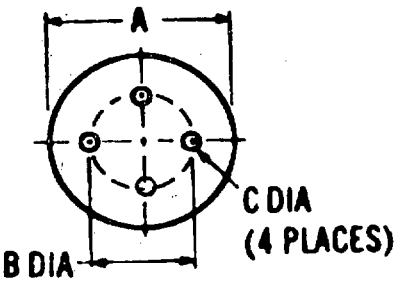


Configuration J.

Part Number M49466/02- Material Grade 1/ and thickness			Dimensions (mm in parentheses)				
I .010 (.25)	II .010 (.25)	III .015 (.38)	A	B	C	JEDEC Case Size	Configuration
060R	061R	062R	1.063 (27.00)	.690 (17.53)	.200 (5.08)	TO-36	G
063R	064R		.250 (6.35)	.100 (2.54)	.036 (.91)	TO-18	H
065R	066R		.250 (6.35)	.100 (2.54)	.036 (.91)	TO-18	J
067R	068R	069R	.360 (9.14)	.200 (5.08)	.040 (1.01)	TO-5	H
070R	071R		.360 (9.14)	.200 (5.08)	.040 (1.01)	TO-5	J

1/ See requirements (thermal impedance)

FIGURE 2. Insulator, Disks. - Configuration G, H, and J.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.



Part Number M49466/02- Material Grade 1/ and thickness			Dimensions (mm in parentheses)		
I .010 (.25)	II .010 (.25)	III .015 (.38)	A	B	JEDEC Case Size
080R	081R		.510 (12.95)	.200 (5.08)	DO-4
082R	083R	084R	.625 (15.88)	.200 (5.08)	DO-4
085R	086R		.800 (20.32)	.260 (6.60)	DO-5
087R	088R	089R	1.000 (25.40)	.260 (6.60)	DO-5

1/ See requirements (thermal impedance)

FIGURE 3. Insulator, Washers.

NOTES:

1. Dimension are in inches.
2. Metric equivalents (to the nearest .01) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerances are ±.015 (.38 mm), ±.010 (.25mm) on hole diameters and ±.002 (.05) on thicknesses.

REQUIREMENTS:

Design and configuration: See figures 1 thru 3.

Material: Silicon Rubber, Fiberglass Reinforced in accordance with MIL-I-49456, type 1, except test requirements for thermal impedance shall be in accordance with 4.6 of MIL-I-49466. (material symbol R).

Thermal impedance: Grade I, .50 °C in^2/W maximum
Grade II, .30 °C in^2/W maximum
Grade III, .26 °C in^2/W maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

Part number: M49466/02- (and dash number from applicable table).

TABLE I Supersession Information

Dash Number	Superseded Number M38527/08-	Dash Number	Superseded Number M38527/08-	Dash Number	Superseded Number M38527/08-
003R	098G	016R	100G	026R	105R
006R	104R	019R	101G	029R	102R
009R	099R	026R	103G	067R	106R
011R	108R	026R	103R		

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
DLA - GS
Air Force - 11, 19, 99

User activities:
Navy - CG, MC

Agent:
DLA - GS

Preparing activity
Army - ER

(Project 5970-0633-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.