MILITARY SPECIFICATION SHEET

POWER CONTROLLER, INDICATOR DRIVER SPST, NORMAL OPEN, 500 MILLIAMPERES

The complete requirements for procuring the indicator drivers described herein shall consist of this document and the latest issue of specification MIL- - .


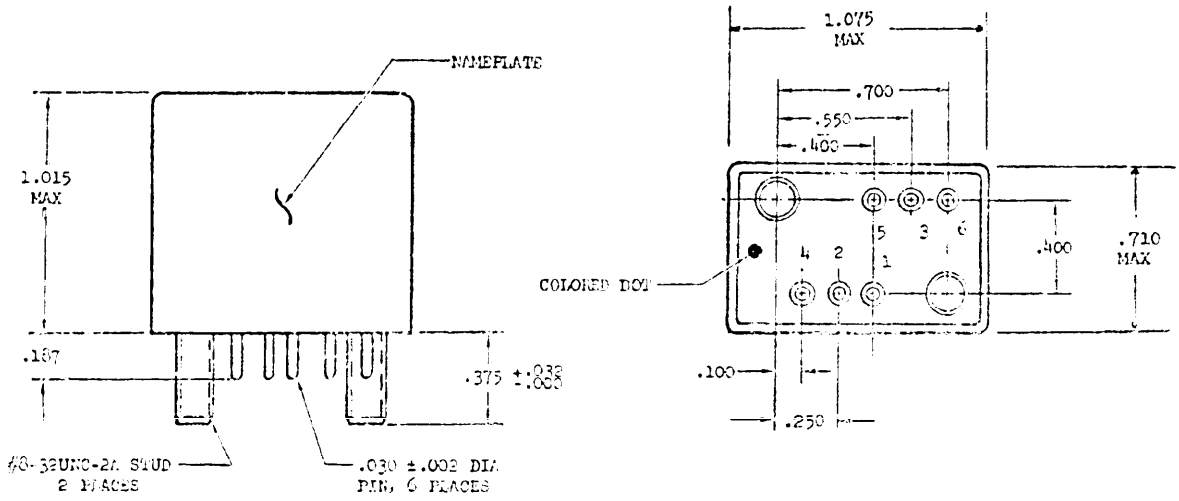


FIGURE 1 - INDICATOR DRIVER, 28 vdc, 500 ma

REFERENCE PIN DIAGRAM
TERMINAL DESIGNATIONS ARE FOR REFERENCE ONLY DO NOT APPEAR ON HEADER



NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .02 for two place decimals and ± .005 for three place decimals.
3. Terminals shall be tin plated followed by a flow process or coated with composition Sn 60 to Sn 70 solder conforming to QQ-S-571 to facilitate soldering.

REQUIREMENTS:

MECHANICAL AND DIMENSIONAL CHARACTERISTICS

Dimensions and configuration	See Figure
Enclosure	Black anodized metal, sealed-watertight
Terminals	See Figure, terminals shall be electrically isolated from case
Weight	1.8 ounces maximum
Thermal resistance case-to-ambient	20°C/watt maximum at sea level

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:51Z
Check the source to verify that this is the current version before use.

ELECTRICAL CHARACTERISTICS (120°C case temperature unless otherwise specified)

Terminal arrangement	SPST (normally open)
Rated operating voltage	29 volts DC
Current rating	500 milliampere
Control voltage (CN and Dim)	± 10.0 volts maximum
Rated control voltage (CN and Dim)	± 5.0 volts
Turn-on voltage (CN and Dim)	+ 3.5 volts minimum
Turn-off voltage (CN and Dim)	+ 2.5 volts maximum
Turn-on time	1.0 millisecond maximum
Turn-off time	1.0 millisecond maximum
Output rise time	0.5 millisecond maximum 0.02 millisecond minimum
Output fall time	0.5 millisecond maximum 0.02 millisecond minimum
Control and Dim input resistance	500 ohms ± 10%
Voltage drop	0.5 volts maximum @ 500 ma
Leakage current	100 micro amperes maximum
Power dissipation - actuated	2.0 watts maximum
Power dissipation - unactuated	.25 watts maximum
Trip out current	See Figure 1 of MIL-C-XXXXX
Trip out time	See Figure 2 of MIL-C-XXXXX
Rupture capacity	2000 amperes
Reset voltage	± 10.0 volts dc maximum ± 5.0 volts rated + 3.5 volts minimum
Application time to reset	5.0 to 20 milliseconds
Interruption time to reset	5.0 milliseconds minimum
Reset cycle time	30.0 seconds minimum
Operating voltage transients	MIL-STD-704
Control input transients	100 volts applied between terminals 1 and 6, 4 and 6, and 5 and 6
Dielectric withstand voltage	1,000 volts rms
Fail safe current	See Table I
Life (operating cycles)	1,000,000 minimum

ENVIRONMENTAL CHARACTERISTICS

Case operating temperature	-54°C to + 120°C
Case storage temperature	-65°C to +150°C
Shock	100G for 11 milliseconds
Vibration	30G, 78 -2000 Hz
Acceleration	100G
Altitude	Sea level to 100,000 feet

TABLE I - Dash numbers and applicable characteristics

Part Number M /06-	Operating Voltage, Output (VDC)		Failure Rate Level	Failsafe Current (amps)
	Minimum	Dim Mode		
0001	26.5	12	A	5.0
0002	26.5	9	A	5.0

Custodian:
Navy - AS

Preparing activity:
Navy - AS
(Project no. FSC 6110 -N071)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:51Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-P-81653/8(AS) POWER CONTROLLER, INDICATOR DRIVER SPST, NORMAL OPEN, 500 MILLAMPE RES

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD, FORM 1 APR 63 1426

C-0879

Source: https://assist.dla.mil -- Downloaded: 202640-23T05:51Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:51Z
Check the source to verify that this is the current version before use.