MILITARY SPECIFICATION

WARHEAD, GUIDED MISSILE, CHEMICAL AGENT, 1500 LB., E9

1. SCOPE

1.1 This specification covers a warhead containing GB-filled bombs.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-T-704 - Treatment and Painting of Material.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

FSC 1336

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:08Z
Check the source to verify that this is the current version before use.

DRAWINGS

EDGEWOOD ARSENAL

DL123-1-41 - Warhead, Guided Missile, Chemical Agent, 1500 Lb., E9.

(All drawings referenced in this specification are listed on Dwg DL123-1-41.)

(Copies of specifications, standards, drawings, and publications required by supplier in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components. The supplier shall ascertain, prior to their use, that all materials and components have met their respective specifications.

3.2 Loading, assembling, and marking. The warhead shall be loaded, assembled, and marked as shown on Drawing E123-1-41.

3.3 Pellet density. The pellet shall have a density between 1.45 and 1.60 grams per cubic centimeter when tested as specified in 4.6.1.

3.4 Electrical cable and aft closure. The cable and closure shall be reassembled per Drawing E123-1-42 after bombs have been installed.

3.5 Weight. The loaded and assembled warhead without fuze shall weigh 1471 ± 10 pounds (the XM71 fuze weighs 140 pounds).

3.6 Longitudinal center of gravity. The longitudinal center of gravity of the loaded and assembled warhead compartment, including the weight of the XM71 fuze (center gravity at station 39), shall be located at station 101 ± 2 inches when examined as specified in 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:08Z
Check the source to verify that this is the current version before use.

3.7 Radial center of gravity. The radial center of gravity of the loaded and assembled warhead compartment shall be within 1 inch of the axis when tested as specified in 4.6.3.

3.8 Leakage. The warhead shall not show a pressure drop of more than 1/2 pound per square inch gage (psig) when subjected to an internal air pressure of 15 ± 0.5 psig for a minimum period of 5 minutes when tested as specified in 4.6.4.

3.9 Workmanship. The warhead shall be free from damage, such as dents and gauges which could affect its use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Special provisions.

4.2.1 Alternative inspection. The supplier may utilize any alternative inspection procedure which will provide equal or better assurance of quality by submitting a written proposal with justification and obtaining written approval from the Government prior to instituting the procedure. In case of dispute, the procedures of this specification will govern.

4.2.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specificotion have been satisfied.

4.3 Lotting. No more than two lots of bombs shall be represented in any one warhead.

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:08Z
Check the source to verify that this is the currentversion before use.

4.4 Sampling for pellet density. Sampling shall be conducted in accordance with MIL-STD-105, Level S-2.

4.5 Inspection provisions.

4.5.1 Examination and tests. Each warhead shall be examined and tested in accordance with the list of defects.

4.5.2 For pellet density. Sample pellets shall be tested in accordance with 4.6.1. The acceptance number is zero.

4.5.3 List of defects.

4.5.3.1 Warhead, guided missile, chemical agent, 1500 lb., E9 (Dwg E123-1-41).

1	Leakage (4.6.4)
2	Component incorrectly assembled
3	Weight incorrect
4	Longitudinal center of gravity incorrect (4.6.2)
5	Radial center of gravity incorrect (4.6.3)
6	Workmanship (3.9)
7	Marking incorrect
8	Marking illegible
9	Humidity indicator missing
10	Color code identification missing

4.6 Tests.

4.6.1 Pellet density. Two calibrated aqueous zinc chloride solutions shall be prepared with densities of 1.45 and 1.60. The pellet, when subjected to the two appropriate solutions, shall submerge in the one of lower density and float in the one of higher density.

4.6.2 Lognitudinal center of gravity. The loaded warhead, with a dummy fuze in position, shall be placed in Edgewood Arsenal test device Q133 to determine the longitudinal center of gravity.

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:08Z
Check the source to verify that this is the currentversion before use.

4.6.3 Radial center of gravity. The loaded warhead, with a dummy fuze in position shall be placed in Edgewood Arsenal test device Q132 to determine the radial center of gravity.

4.6.4 Leakage. The loaded warhead shall be subjected to the specified pressure through a shut-off device and a gage. The shut-off valve shall be closed and, after the required period of time, the gage shall be checked for the amount of drop in pressure.

5. PREPARATION FOR DELIVERY

5.1 Packing, Level A.

5.1.1 Repainting. Damaged portions of painted areas on the reusable shipping container and component parts thereto shall be treated and repainted in accordance with type A of MIL-T-704, except that the color of the finish coat of paint shall conform to the requirements of the applicable drawings.

5.1.2 Warhead. The filled warhead shall be packed in a reusable shipping container conforming to Drawing 8857798. Desiccant and humidity indicator cards shall be enclosed. The container shall be closed as specified on Drawing 8857798.


5.2 Marking. In addition to any special marking required by the contract or order, the reusable shipping container shall be marked as specified on Drawing 8857798 and MIL-STD-129, except that color code identification shall be as specified on figure 1.

6. NOTES

6.1 Intended use. This item is intended for use as a component of a guided missile.

6.2 Ordering data. Procurement documents should specify the title, number, and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:08Z
Check the source to verify that this is the current version before use.

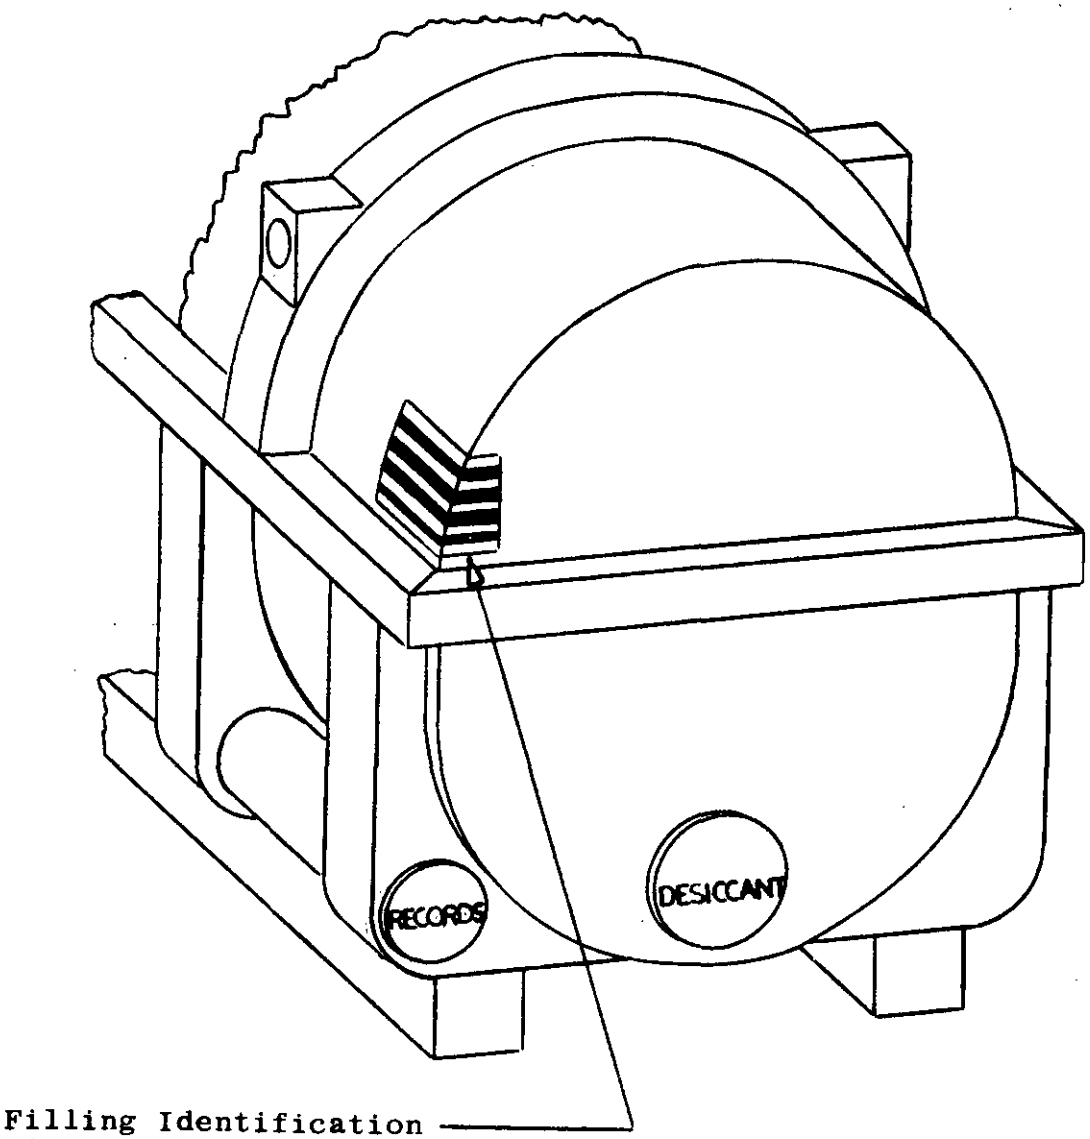

Mark corner of Shipping Container as shown. Three 1/2-inch wide color stripes, Green No. 24108 or 34108 and a 1/4-inch wide color stripe, Yellow No. 23538 or 33538, spaced 1/2-inch apart on a 4 1/4-inch wide color Gray No. 26231 or 36231 background.

Figure 1 - Shipping Container Color Code Marking

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:08Z
Check the source to verify that this is the current version before use.

6.3 Precaution. In view of the hazards attending the handling of GB-filled munitions, suppliers are advised to exercise care to prevent injury to personnel engaged in loading warheads in accordance with this specification.

6.4 Safety classification. This item is chemical group A (special), explosive hazard class 4 (Army Materiel Command Regulation No. 385-224).

6.5 Center of gravity. Pie-shaped weights (2.25 pounds each) have been attached to the aft closure of the warhead compartment for use in adjusting the longitudinal and radial centers of gravity.

6.6 Component specifications. The following specifications cover components of the warhead.

MIL-B-60073 - Bomb, Nonpersistent Gas, Spherical, 4.5-Inch, M139; Filling and Assembly.
MIL-W-60080 - Warhead, Guided Missile, Empty, E6.

Custodian:

Army - MU

Preparing activity:

Army - MU (EA)

Project No. 1336-A123

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. *COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID*

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

Source: https://assist.dla.mil -- Downloaded: 20260-23T00:08Z
Check the source to verify that this is the current version before use.