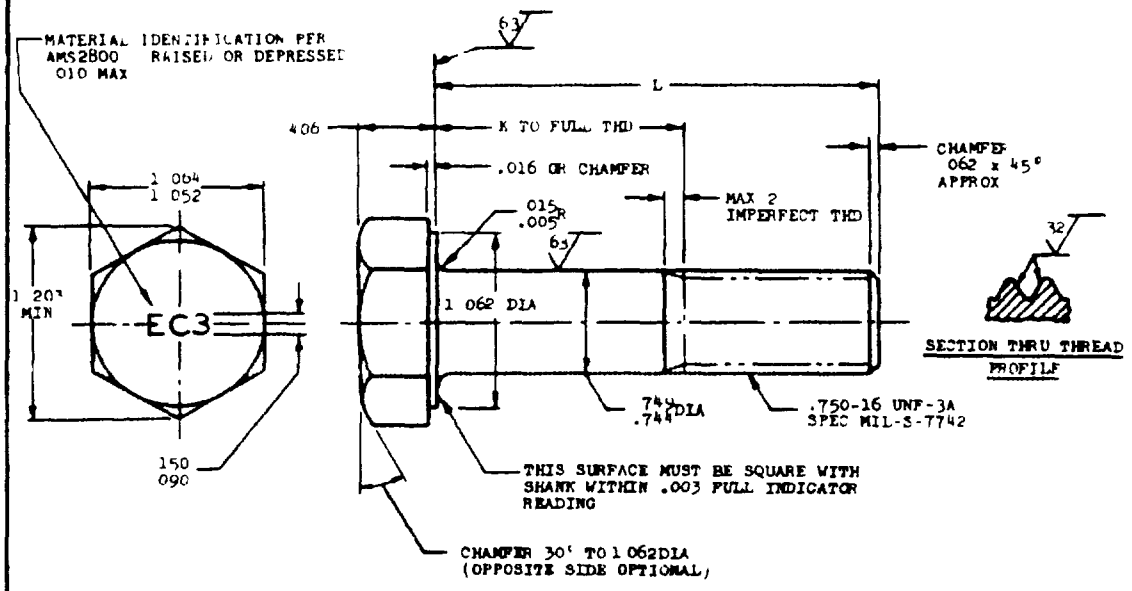



| L | K +.000 -.060 | PART NO | L | K +.000 -.060 | PART NO. | L | K +.000 -.060 | PART NO | L | K +.000 -.060 | PART NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | 1.938 | .812 | AN105417 | 3.625 | 2.500 | AN105431 | 5.375 | 4.250 | AN105445 |
| | | | 2.000 | .875 | AN105418 | 3.750 | 2.625 | AN105432 | 5.500 | 4.375 | AN105446 |
| | | | 2.125 | 1.000 | AN105419 | 3.875 | 2.750 | AN105433 | 5.625 | 4.500 | AN105447 |
| 1.250 | .125 | AN105406 | 2.250 | 1.125 | AN105420 | 4.000 | 2.875 | AN105434 | 5.750 | 4.625 | AN105448 |
| 1.312 | .188 | AN105407 | 2.375 | 1.250 | AN105421 | 4.125 | 3.000 | AN105435 | 5.875 | 4.750 | AN105449 |
| 1.375 | .250 | AN105408 | 2.500 | 1.375 | AN105422 | 4.250 | 3.125 | AN105436 | 6.000 | 4.875 | AN105450 |
| 1.438 | .312 | AN105409 | 2.625 | 1.500 | AN105423 | 4.375 | 3.250 | AN105437 | | | |
| 1.500 | .375 | AN105410 | 2.750 | 1.625 | AN105424 | 4.500 | 3.375 | AN105438 | | | |
| 1.562 | .438 | AN105411 | 2.875 | 1.750 | AN105425 | 4.625 | 3.500 | AN105439 | | | |
| 1.625 | .500 | AN105412 | 3.000 | 1.875 | AN105426 | 4.750 | 3.625 | AN105440 | | | |
| 1.688 | .562 | AN105413 | 3.125 | 2.000 | AN105427 | 4.875 | 3.750 | AN105441 | | | |
| 1.750 | .625 | AN105414 | 3.250 | 2.125 | AN105428 | 5.000 | 3.875 | AN105442 | | | |
| 1.812 | .688 | AN105415 | 3.375 | 2.250 | AN105429 | 5.125 | 4.000 | AN105443 | | | |
| 1.875 | .750 | AN105416 | 3.500 | 2.375 | AN105430 | 5.250 | 4.125 | AN105444 | | | |

NOTE (2) SHANK SHALL BE STRAIGHT WITHIN .002 FIR PER INCH OF BOLT LENGTH
THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR

**INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD**

MATERIAL CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS AS107
MANUFACTURING SPECIFICATION AMS 5732
(3) INSPECTION ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645
BREAK SHARP EDGES .30 .01 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± .010 ANGULAR DIMENSIONS ±1°
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

P A
USAF - 11
Other Cust
Navy - As
Navy - As

**AIR FORCE-NAVY AERONAUTICAL STANDARD**

BOLT - CRES HEX HEAD 750-16

**AN105401 THRU AN105500**

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1967

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Project No 5306-1078

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.