
FED. SUP CLASS. 5306

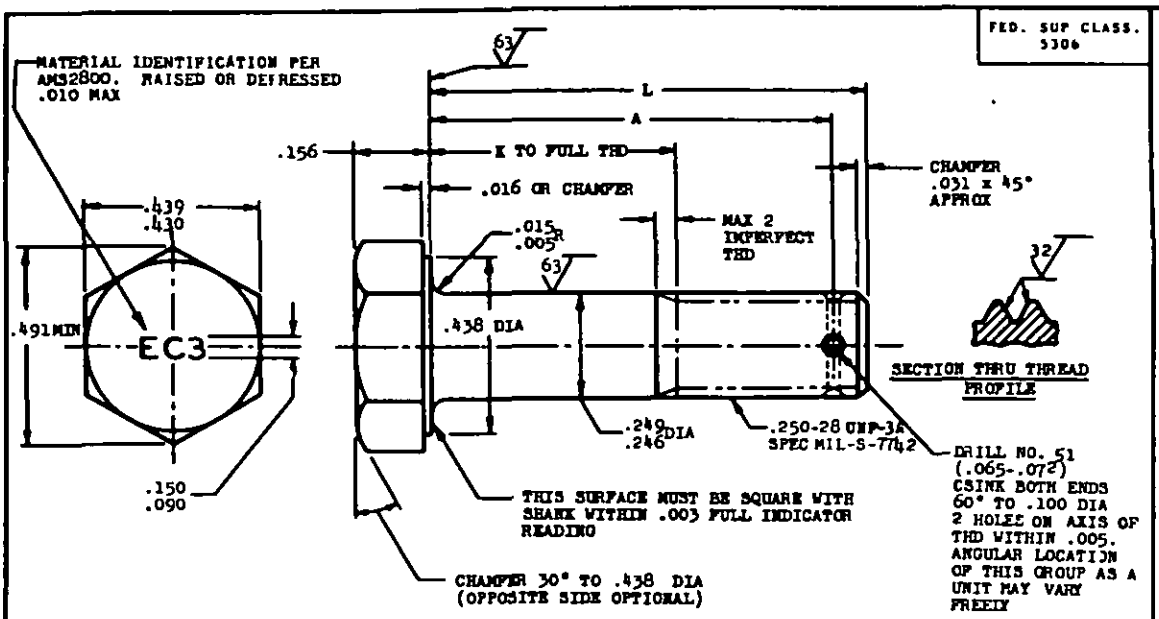

L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				1.750	1.640	1.125	AN105626	4.375	4.265	3.750	AN105647
.500	.390	(a)	AN105606	1.875	1.765	1.250	AN105627	4.500	4.390	3.875	AN105648
.562	.452	(a)	AN105607	2.000	1.890	1.375	AN105628	4.625	4.515	4.000	AN105649
.625	.515	(a)	AN105608	2.125	2.015	1.500	AN105629	4.750	4.640	4.125	AN105650
.688	.578	(a)	AN105609	2.250	2.140	1.625	AN105630	4.875	4.765	4.250	AN105651
.750	.640	.125	AN105610	2.375	2.265	1.750	AN105631	5.000	4.890	4.375	AN105652
.812	.702	.188	AN105611	2.500	2.390	1.875	AN105632	5.125	5.015	4.500	AN105653
.875	.765	.250	AN105612	2.625	2.515	2.000	AN105633	5.250	5.140	4.625	AN105654
.938	.828	.312	AN105613	2.750	2.640	2.125	AN105634	5.375	5.265	4.750	AN105655
1.000	.890	.375	AN105614	2.875	2.765	2.250	AN105635	5.500	5.390	4.875	AN105656
1.062	.952	.438	AN105615	3.000	2.890	2.375	AN105636	5.625	5.515	5.000	AN105657
1.125	1.015	.500	AN105616	3.125	3.015	2.500	AN105637	5.750	5.640	5.125	AN105658
1.188	1.078	.562	AN105617	3.250	3.140	2.625	AN105638	5.875	5.765	5.250	AN105659
1.250	1.140	.625	AN105618	3.375	3.265	2.750	AN105639	6.000	5.890	5.375	AN105660
1.312	1.202	.688	AN105619	3.500	3.390	2.875	AN105640				
1.375	1.265	.750	AN105620	3.625	3.515	3.000	AN105641				
1.438	1.328	.812	AN105621	3.750	3.640	3.125	AN105642				
1.500	1.390	.875	AN105622	3.875	3.765	3.250	AN105643				
1.562	1.452	.938	AN105623	4.000	3.890	3.375	AN105644				
1.625	1.515	1.000	AN105624	4.125	4.015	3.500	AN105645				
1.688	1.578	1.062	AN105625	4.250	4.140	3.625	AN105646				

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .013 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD, DRILLED SHANK, .250-28

AN105601 THRU AN105700

Project No. 5306-104C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.