
FED. SUP CLASS. 5306

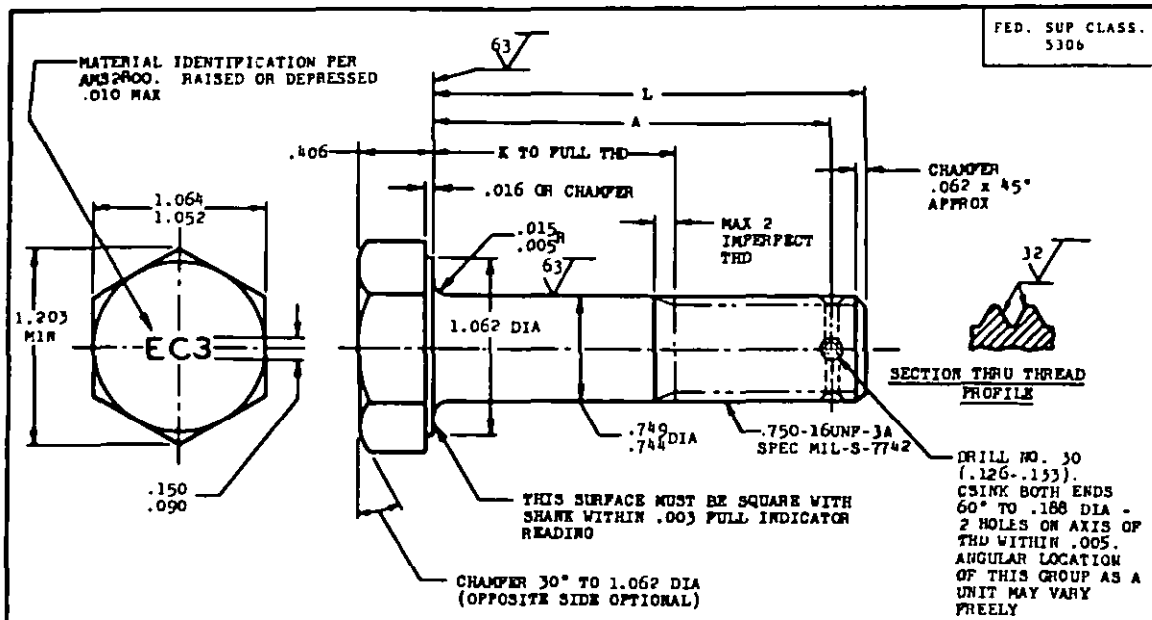

L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				2.750	2.590	1.625	AN106324	5.375	5.215	4.250	AN106345
				2.875	2.715	1.750	AN106325	5.500	5.340	4.375	AN106346
				3.000	2.840	1.875	AN106326	5.625	5.465	4.500	AN106347
1.250	1.090	.125	AN106306	3.125	2.965	2.000	AN106327	5.750	5.590	4.625	AN106348
1.312	1.152	.188	AN106307	3.250	3.090	2.125	AN106328	5.875	5.715	4.750	AN106349
1.375	1.215	.250	AN106308	3.375	3.215	2.250	AN106329	6.000	5.840	4.875	AN106350
1.438	1.278	.313	AN106309	3.500	3.340	2.375	AN106330				
1.500	1.340	.375	AN106310	3.625	3.465	2.500	AN106331				
1.562	1.402	.438	AN106311	3.750	3.590	2.625	AN106332				
1.625	1.465	.500	AN106312	3.875	3.715	2.750	AN106333				
1.688	1.528	.562	AN106313	4.000	3.840	2.875	AN106334				
1.750	1.590	.625	AN106314	4.125	3.965	3.000	AN106335				
1.812	1.652	.688	AN106315	4.250	4.090	3.125	AN106336				
1.875	1.715	.750	AN106316	4.375	4.215	3.250	AN106337				
1.938	1.778	.812	AN106317	4.500	4.340	3.375	AN106338				
2.000	1.840	.875	AN106318	4.625	4.465	3.500	AN106339				
2.125	1.965	1.000	AN106319	4.750	4.590	3.625	AN106340				
2.250	2.090	1.125	AN106320	4.875	4.715	3.750	AN106341				
2.375	2.215	1.250	AN106321	5.000	4.840	3.875	AN106342				
2.500	2.340	1.375	AN106322	5.125	4.965	4.000	AN106343				
2.625	2.465	1.500	AN106323	5.250	5.090	4.125	AN106344				

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD, DRILLED SHANK, .750-16

AN106301 THRU AN106400

Project No. 5306-1047

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.