
FED. SUP CLASS.
5306

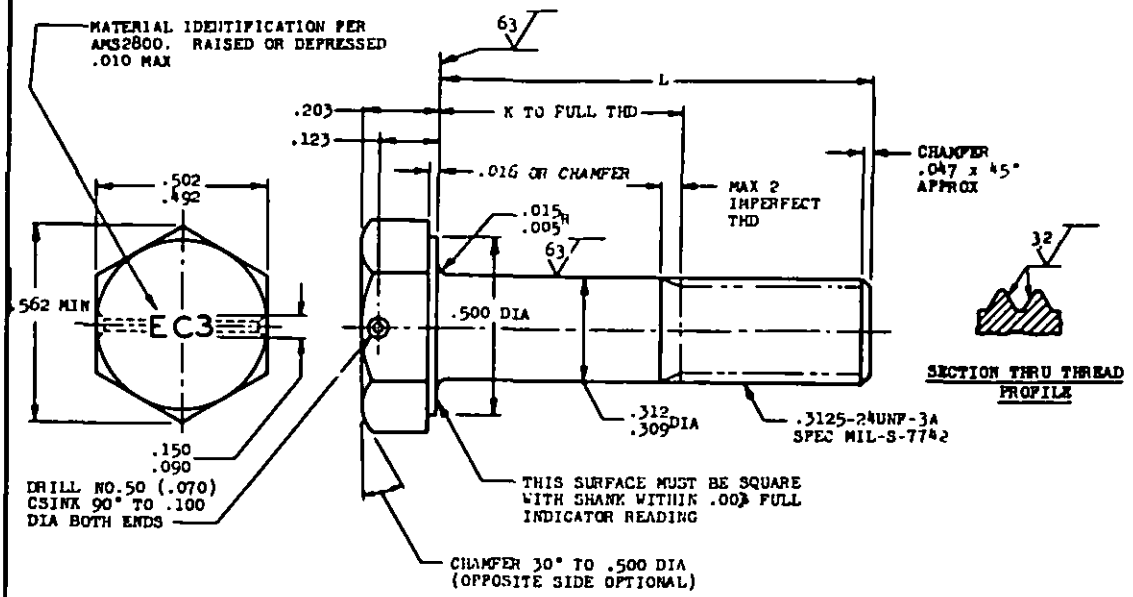

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
.500	(a)	AN106606	1.312	.438	AN106619	2.500	1.625	AN106633	4.250	3.375	AN106647
.562	(a)	AN106607	1.375	.500	AN106620	2.625	1.750	AN106634	4.375	3.500	AN106648
.625	(a)	AN106608	1.438	.562	AN106621	2.750	1.875	AN106635	4.500	3.625	AN106649
.688	(a)	AN106609	1.500	.625	AN106622	2.875	2.000	AN106636	4.625	3.750	AN106650
.750	(a)	AN106610	1.562	.688	AN106623	3.000	2.125	AN106637	4.750	3.875	AN106651
.812	(a)	AN106611	1.625	.750	AN106624	3.125	2.250	AN106638	4.875	4.000	AN106652
.875	(a)	AN106612	1.688	.812	AN106625	3.250	2.375	AN106639	5.000	4.125	AN106653
.938	(a)	AN106613	1.750	.875	AN106626	3.375	2.500	AN106640	5.125	4.250	AN106654
1.000	.125	AN106614	1.812	.938	AN106627	3.500	2.625	AN106641	5.250	4.375	AN106655
1.062	.188	AN106615	1.875	1.000	AN106628	3.625	2.750	AN106642	5.375	4.500	AN106656
1.125	.250	AN106616	2.000	1.125	AN106629	3.750	2.875	AN106643	5.500	4.625	AN106657
1.188	.312	AN106617	2.125	1.250	AN106630	3.875	3.000	AN106644	5.625	4.750	AN106658
1.250	.375	AN106618	2.250	1.375	AN106631	4.000	3.125	AN106645	5.750	4.875	AN106659
			2.375	1.500	AN106632	4.125	3.250	AN106646	5.875	5.000	AN106660
									6.000	5.125	AN106661

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .015 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1981

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .3125-24

AN106601 THRU AN106700

Project No. 5306-1050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.