FED. SUP CLASS. 5306

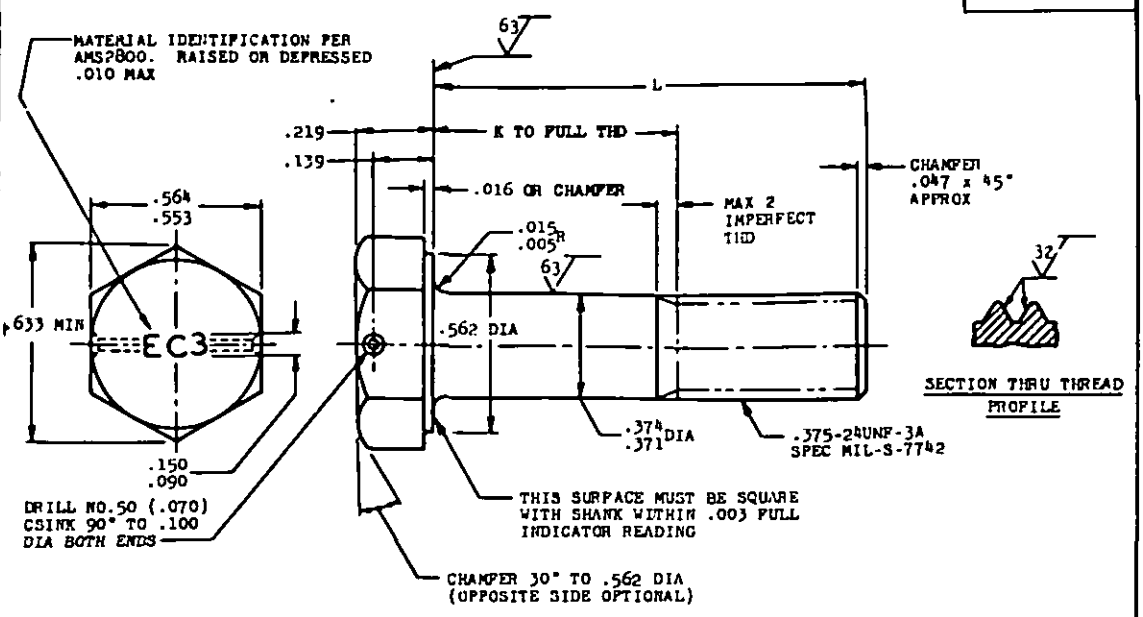

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO
			1.438	.438	AN106719	2.625	1.625	AN106733	4.375	3.375	AN106747
.625	(a)	AN106706	1.500	.500	AN106720	2.750	1.750	AN106734	4.500	3.500	AN106748
.688	(a)	AN106707	1.562	.562	AN106721	2.875	1.875	AN106735	4.625	3.625	AN106749
.750	(a)	AN106708	1.625	.625	AN106722	3.000	2.000	AN106736	4.750	3.750	AN106750
.812	(a)	AN106709	1.688	.688	AN106723	3.125	2.125	AN106737	4.875	3.875	AN106751
.875	(a)	AN106710	1.750	.750	AN106724	3.250	2.250	AN106738	5.000	4.000	AN106752
..938	(a)	AN106711	1.812	.812	AN106725	3.375	2.375	AN106739	5.125	4.125	AN106753
1.000	(a)	AN106712	1.875	.875	AN106726	3.500	2.500	AN106740	5.250	4.250	AN106754
1.062	(a)	AN106713	1.938	.938	AN106727	3.625	2.625	AN106741	5.375	4.375	AN106755
1.125	.125	AN106714	2.000	1.000	AN106728	3.750	2.750	AN106742	5.500	4.500	AN106756
1.188	.188	AN106715	2.125	1.125	AN106729	3.875	2.875	AN106743	5.625	4.625	AN106757
1.250	.250	AN106716	2.250	1.250	AN106730	4.000	3.000	AN106744	5.750	4.750	AN106758
1.312	.312	AN106717	2.375	1.375	AN106731	4.125	3.125	AN106745	5.875	4.875	AN106759
1.375	.375	AN106718	2.500	1.500	AN106732	4.250	3.250	AN106746	6.000	5.000	AN106760

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1967

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. USAF - 11 Other Cust Navy - AS Army - AV	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN106701 THRU AN106800
	BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .375-24	

Project No. 5306-1051

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.