FED. SUP CLASS.
5306

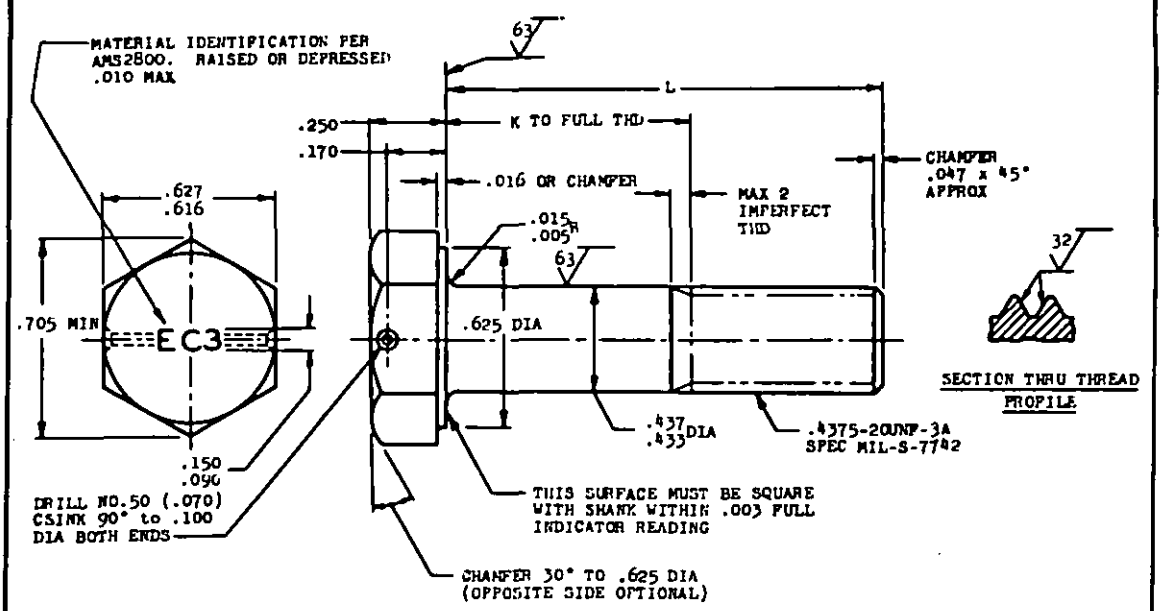

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.562	.438	AN106819	2.750	1.625	AN106833	4.500	3.375	AN106847
.750	(a)	AN106806	1.625	.500	AN106820	2.875	1.750	AN106834	4.625	3.500	AN106848
.812	(a)	AN106807	1.688	.562	AN106821	3.000	1.875	AN106835	4.750	3.625	AN106849
.875	(a)	AN106808	1.750	.625	AN106822	3.125	2.000	AN106836	4.875	3.750	AN106850
.938	(a)	AN106809	1.812	.688	AN106823	3.250	2.125	AN106837	5.000	3.875	AN106851
1.000	(a)	AN106810	1.875	.750	AN106824	3.375	2.250	AN106838	5.125	4.000	AN106852
1.062	(a)	AN106811	1.938	.812	AN106825	3.500	2.375	AN106839	5.250	4.125	AN106853
1.125	(a)	AN106812	2.000	.875	AN106826	3.625	2.500	AN106840	5.375	4.250	AN106854
1.188	(a)	AN106813	2.062	.938	AN106827	3.750	2.625	AN106841	5.500	4.375	AN106855
1.250	(a)	AN106814	2.125	1.000	AN106828	3.875	2.750	AN106842	5.625	4.500	AN106856
1.312	.188	AN106815	2.250	1.125	AN106829	4.000	2.875	AN106843	5.750	4.625	AN106857
1.375	.250	AN106816	2.375	1.250	AN106830	4.125	3.000	AN106844	5.875	4.750	AN106858
1.438	.312	AN106817	2.500	1.375	AN106831	4.250	3.125	AN106845	6.000	4.875	AN106859
1.500	.375	AN106818	2.625	1.500	AN106832	4.375	3.250	AN106846			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .019 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1981

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .4375-20

AN106801 THRU AN106900

Project No. 5306-1052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.