FED. SUP. CLASS. 5306

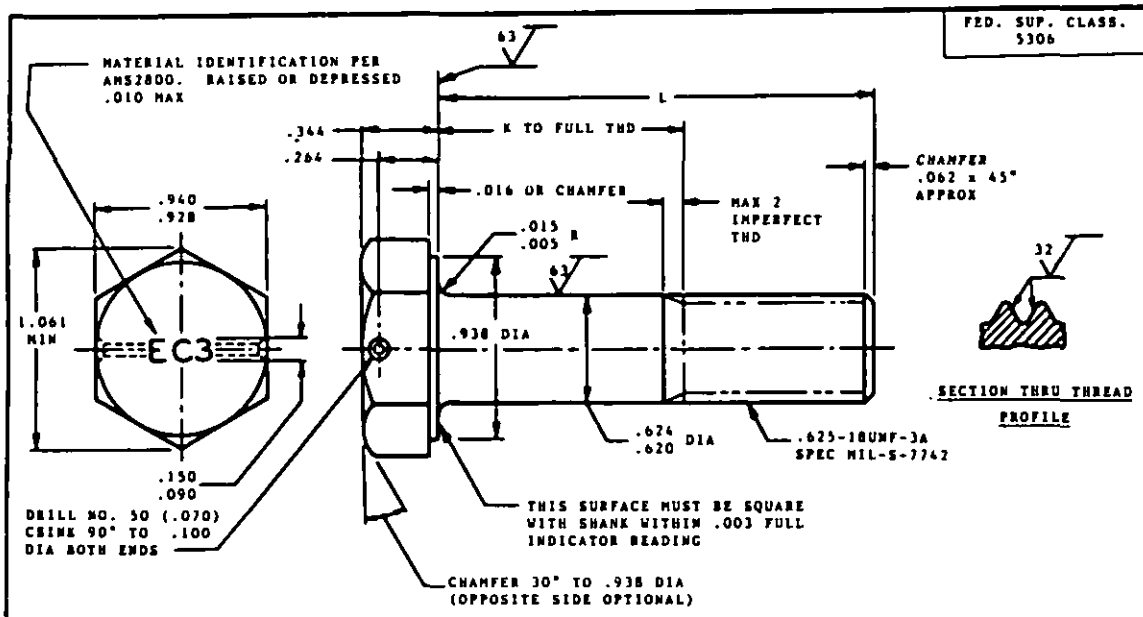

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.938	.438	AN107117	3.125	1.625	AN107131	4.875	3.375	AN107145
			2.000	.500	AN107118	3.250	1.750	AN107132	5.000	3.500	AN107146
			2.062	.562	AN107119	3.375	1.875	AN107133	5.125	3.625	AN107147
1.250	(a)	AN107106	2.125	.625	AN107120	3.500	2.000	AN107134	5.250	3.750	AN107148
1.312	(a)	AN107107	2.188	.688	AN107121	3.625	2.125	AN107135	5.375	3.875	AN107149
1.375	(a)	AN107108	2.250	.750	AN107122	3.750	2.250	AN107136	5.500	4.000	AN107150
1.438	(a)	AN107109	2.312	.812	AN107123	3.875	2.375	AN107137	5.625	4.125	AN107151
1.500	(a)	AN107110	2.375	.875	AN107124	4.000	2.500	AN107138	5.750	4.250	AN107152
1.562	(a)	AN107111	2.438	.938	AN107125	4.125	2.625	AN107139	5.875	4.375	AN107153
1.625	(a)	AN107112	2.500	1.000	AN107126	4.250	2.750	AN107140	6.000	4.500	AN107154
1.688	.188	AN107113	2.625	1.125	AN107127	4.375	2.875	AN107141			
1.750	.250	AN107114	2.750	1.250	AN107128	4.500	3.000	AN107142			
1.812	.312	AN107115	2.875	1.375	AN107129	4.625	3.125	AN107143			
1.875	.375	AN107116	3.000	1.500	AN107130	4.750	3.250	AN107144			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITH .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472

(3) *INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT INSPECTION IN ACCORDANCE WITH AMS2645*

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERENCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .625 - 18

AN107101 THRU AN107200

Project No. 5306-1055

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.