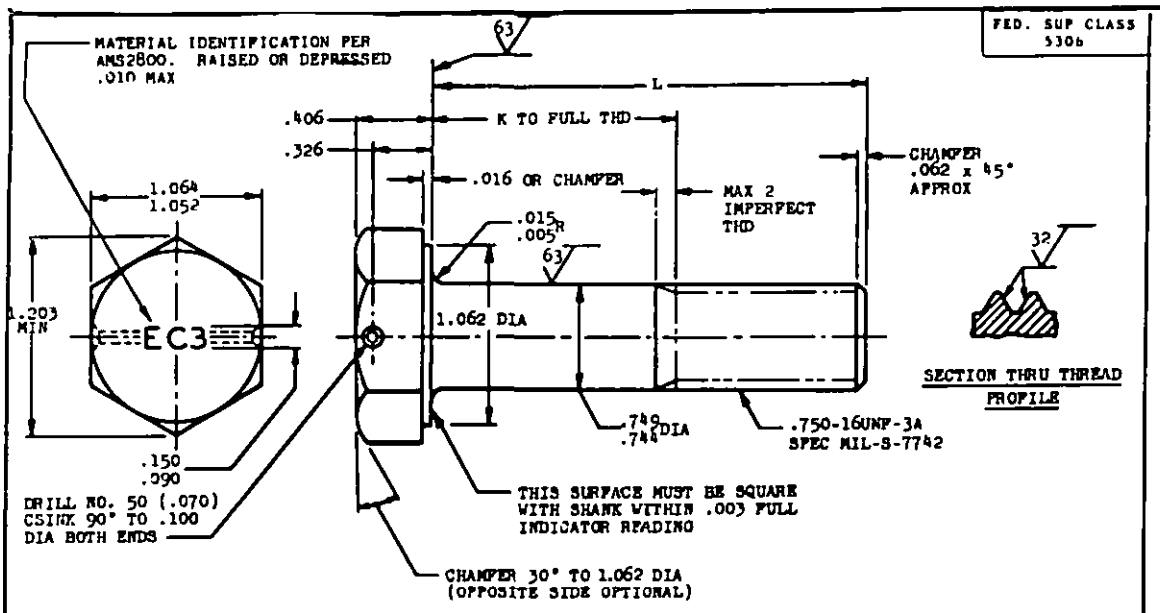

FED. SUP CLASS 5306

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			2.188	.438	AN107217	3.375	1.625	AN107231	5.125	3.375	AN107245
			2.250	.500	AN107218	3.500	1.750	AN107232	5.250	3.500	AN107246
			2.312	.562	AN107219	3.625	1.875	AN107233	5.375	3.625	AN107247
1.500	(a)	AN107206	2.375	.625	AN107220	3.750	2.000	AN107234	5.500	3.750	AN107248
1.562	(a)	AN107207	2.438	.688	AN107221	3.875	2.125	AN107235	5.625	3.875	AN107249
1.625	(a)	AN107208	2.500	.750	AN107222	4.000	2.250	AN107236	5.750	4.000	AN107250
1.688	(a)	AN107209	2.562	.812	AN107223	4.125	2.375	AN107237	5.875	4.125	AN107251
1.750	(a)	AN107210	2.625	.875	AN107224	4.250	2.500	AN107238	6.000	4.250	AN107252
1.812	(a)	AN107211	2.688	.938	AN107225	4.375	2.625	AN107239			
1.875	(a)	AN107212	2.750	1.000	AN107226	4.500	2.750	AN107240			
1.938	(a)	AN107213	2.875	1.125	AN107227	4.625	2.875	AN107241			
2.000	.250	AN107214	3.000	1.250	AN107228	4.750	3.000	AN107242			
2.062	.312	AN107215	3.125	1.375	AN107229	4.875	3.125	AN107243			
2.125	.375	AN107216	3.250	1.500	AN107230	5.000	3.250	AN107244			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7472

(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERENCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .750 - 16

AN107201 THRU AN107300

Project No. 5306-1056

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:25Z
Check the source to verify that this is the current version before use.