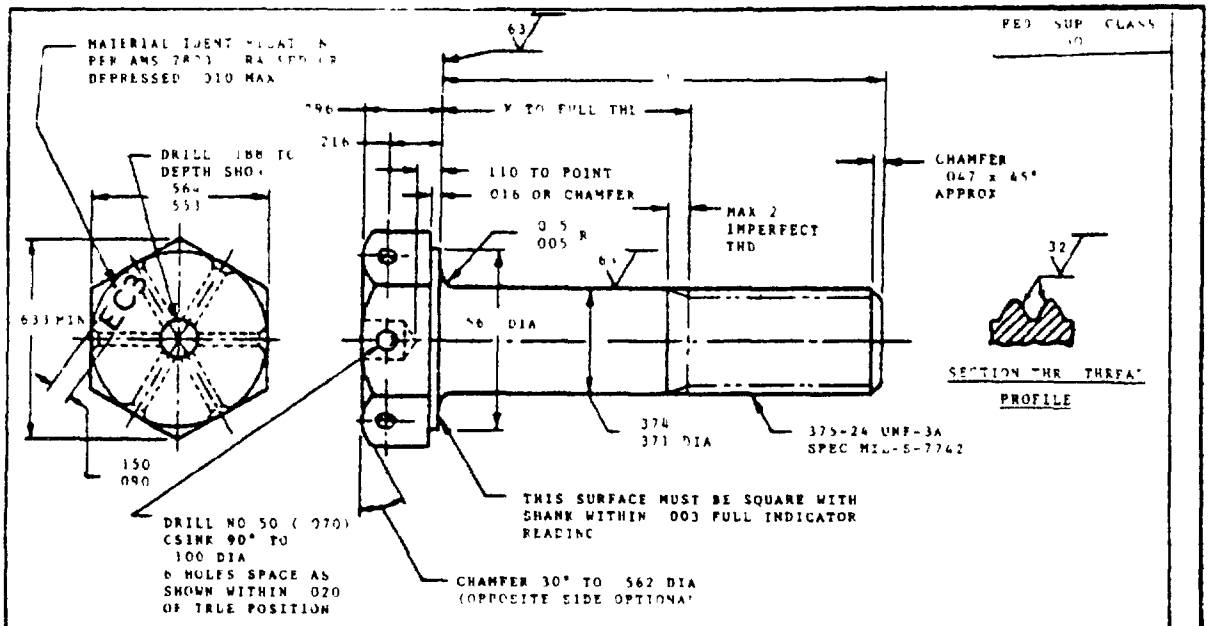


L	K +.000 -.060	PART NO	L	K +.000 -.060	PART NO	L	K +.000 -.060	PART NO	L	K +.000 -.060	PART NO
			1.438	.438	AN107619	2.625	2.625	AN107633	4.375	3.375	AN107647
.62	(a)	AN107606	1.500	.500	AN107620	2.750	2.750	AN107634	4.500	3.500	AN107648
.688	(a)	AN107607	1.562	.562	AN107621	2.875	.875	AN 107635	4.625	3.625	AN107649
.750	(a)	AN107608	.875	.875	AN107622	3.000	2.000	AN107636	4.750	3.750	AN107650
.812	(a)	AN107609	.688	.688	AN107623	3.125	2.125	AN107637	4.875	3.875	AN107651
.875	(a)	AN107610	.750	.750	AN107624	3.250	2.250	AN107638	5.000	4.000	AN107652
.938	(a)	AN107611	.812	.812	AN107625	3.375	2.375	AN107639	5.125	4.125	AN107653
1.000	(a)	AN107612	.875	.875	AN107626	3.500	2.500	AN107640	5.250	4.250	AN107654
1.06	(a)	AN107613	.938	.938	AN1076	3.625	2.625	AN1076	5.375	4.375	AN107655
1.125	.125	AN107614	2.000	.000	AN107628	3.750	2.750	AN1076	5.500	4.500	AN107656
1.188	.188	AN107615	2.125	1.125	AN107629	3.750	2.875	AN107643	5.625	4.625	AN107657
1.250	.250	AN107616	2.250	1.250	AN107630	4.000	3.000	AN107644	5.750	4.750	AN107658
1.312	.312	AN107617	2.375	1.375	AN107631	4.125	3.125	AN107645	5.875	4.875	AN107659
1.375	.375	AN107618	.500	1.500	AN107632	4.250	3.250	AN107646	6.000	5.000	AN107660

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .01 FIR

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD

MATERIAL CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS

MANUFACTURING SPEC

(3) INSPECTION ALL PARTS UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2644

BREAK SHARP EDGES .001 - .01 UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± .010 ANGULAR DIMENSIONS ±2°

DO NOT USE UNASSIGNED PART NUMBER

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 69 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

P A
USAF - 11
Cyber Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 6 HOLES, .375 - 24

AN107601 THRU AN107700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.