MILITARY SPECIFICATION

BALLISTICS COMPUTER, SUBASSEMBLY: 10543600
(GUNNER'S CONTROL UNIT)

This amendment forms a part of Military Specification MIL-B-60599(MU), dated 18 September 1967.

Paragraph 3.5.5, Table I, Lines 9 and 10: Delete:

"3S10 (Peris. & wiper pos.)	.2 ohm	3J5-L	3J5-y
3S10 (Peris. pos.)	.2 ohm	3J5-L	3J5-X"

and substitute

"3S10 (Peris. & wiper pos.)	.2 ohm	3J5-L	3J5-X
3S10 (Peris. & wiper pos.)	.2 ohm	3J5-Y	3J5-X
3S10 (Peris. pos.)	.2 ohm	3J5-L	3J5-X"

Paragraph 3.5.7, Table II, Line 4: Delete:

"Zero .500000 ± .001388"

and substitute

"Zero .500000 ± .000550"

Paragraph 3.5.12, Table V: Delete and substitute:

TABLE V

RANGE IN METERS	VOLTAGE RATIO SETTINGS				
	3R1-1	3R1-2	3R1-3	3R1-4	3R2
475		.069149			
600					.081081
650		.084181			
900				.164774	.162162
1000		.097473	.105184		
1200					.243243
1400		.172311			
1500	.158571			.303532	.324324
1600			.192392		
1800					.405405
2000				.442178	
2100					.486486
2150			.296169		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

TABLE V (Cont'd)

RANGE IN METERS	VOLTAGE RATIO SETTINGS				
	3R1-1	3R1-2	3R1-3	3R1-4	3R2
2400	.370981	.245998			.567567
2500				.607530	
2600			.405926		
2700					.648648
2900			.496042	.732025	.702702
3100					.756756
3200	.620882				
3250			.622698		
3300				.841589	
3400					.837838
3600			.778105	.914031	.918919

Paragraph 3.5.13: Delete and substitute:

"3.5.13 Range function generator output.- The output voltages of the range feedback function generator at pin BB of 3J1 shall agree with the voltage ratio setting for each range dial setting in Table VI. The function generator shall be excited by applying 24.843 ± 1% volts RMS, 400 CPS ± 1% to pin AA of 3J1."

Paragraph 3.5.13, Table VI: Delete and substitute:

"TABLE VI

RANGE IN METERS (DIAL READINGS)	RANGE TOLERANCE IN METERS	VOLTAGE RATIO SETTINGS
3975	±5	.996840
3000	±5	.748817
2500	±5	.623379
2000	±5	.498532
1500	±5	.374022
1250	±5	.311816
1000	±5	.249599
500	±5	.125009
325	±5	.081317"

Paragraph 3.5.14.1: Delete and substitute:

"3.5.14.1 Slew speed.- The servo motor shall slew from stop to stop in both directions within a maximum of 3.0 seconds for each direction at standard ambient temperature, and within 5.0 seconds at the temperature extremes."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

Paragraph 4.2: Delete and substitute the following paragraphs:

"4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three gunner's control units plus three (3) each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection."

Paragraph 4.4.3: Delete and substitute:

"4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot shall be suspended by the Government until necessary corrections have been made by the contractor and resubmitted items have been approved (see 4.3.3)."

Paragraph 4.5.2.1: Delete and substitute:

"4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the technical data package (TDP).

Paragraph 4.6.7: Delete and substitute:

"4.6.7 Circuit breaker.- To determine conformance to 3.5.6, the circuit breaker shall carry a load of 10.0 + 0.0, -0.20 amperes connected across the specified pins, but shall function to open the circuit when a load of 12.5 + 0.20, -0.0 amperes load is connected."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

Paragraph 4.6.13: Delete and substitute:

"4.6.13 Range function generator output.- To determine conformance to 3.5.13 after inserting the unit in the test circuit of Figure 5, the output voltages of the gunner's unit range feedback function generator shall be checked for ratio standard null settings at the range dial settings specified in Table VI."

Paragraph 4.6.14: Delete last sentence and substitute:

"Energize K_2 of the gunner's override reed board by applying 21 VDC across 3J3-Z and 3J3-D, pin Z to be positive."

Figure 2: Delete "Figure 2" and substitute revised "Figure 2" (attached).

Figure 5: Delete "Figure 5" and substitute revised "Figure 5" (attached).

Figure 6: Delete "2N605" and substitute "2N2605".

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A146

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

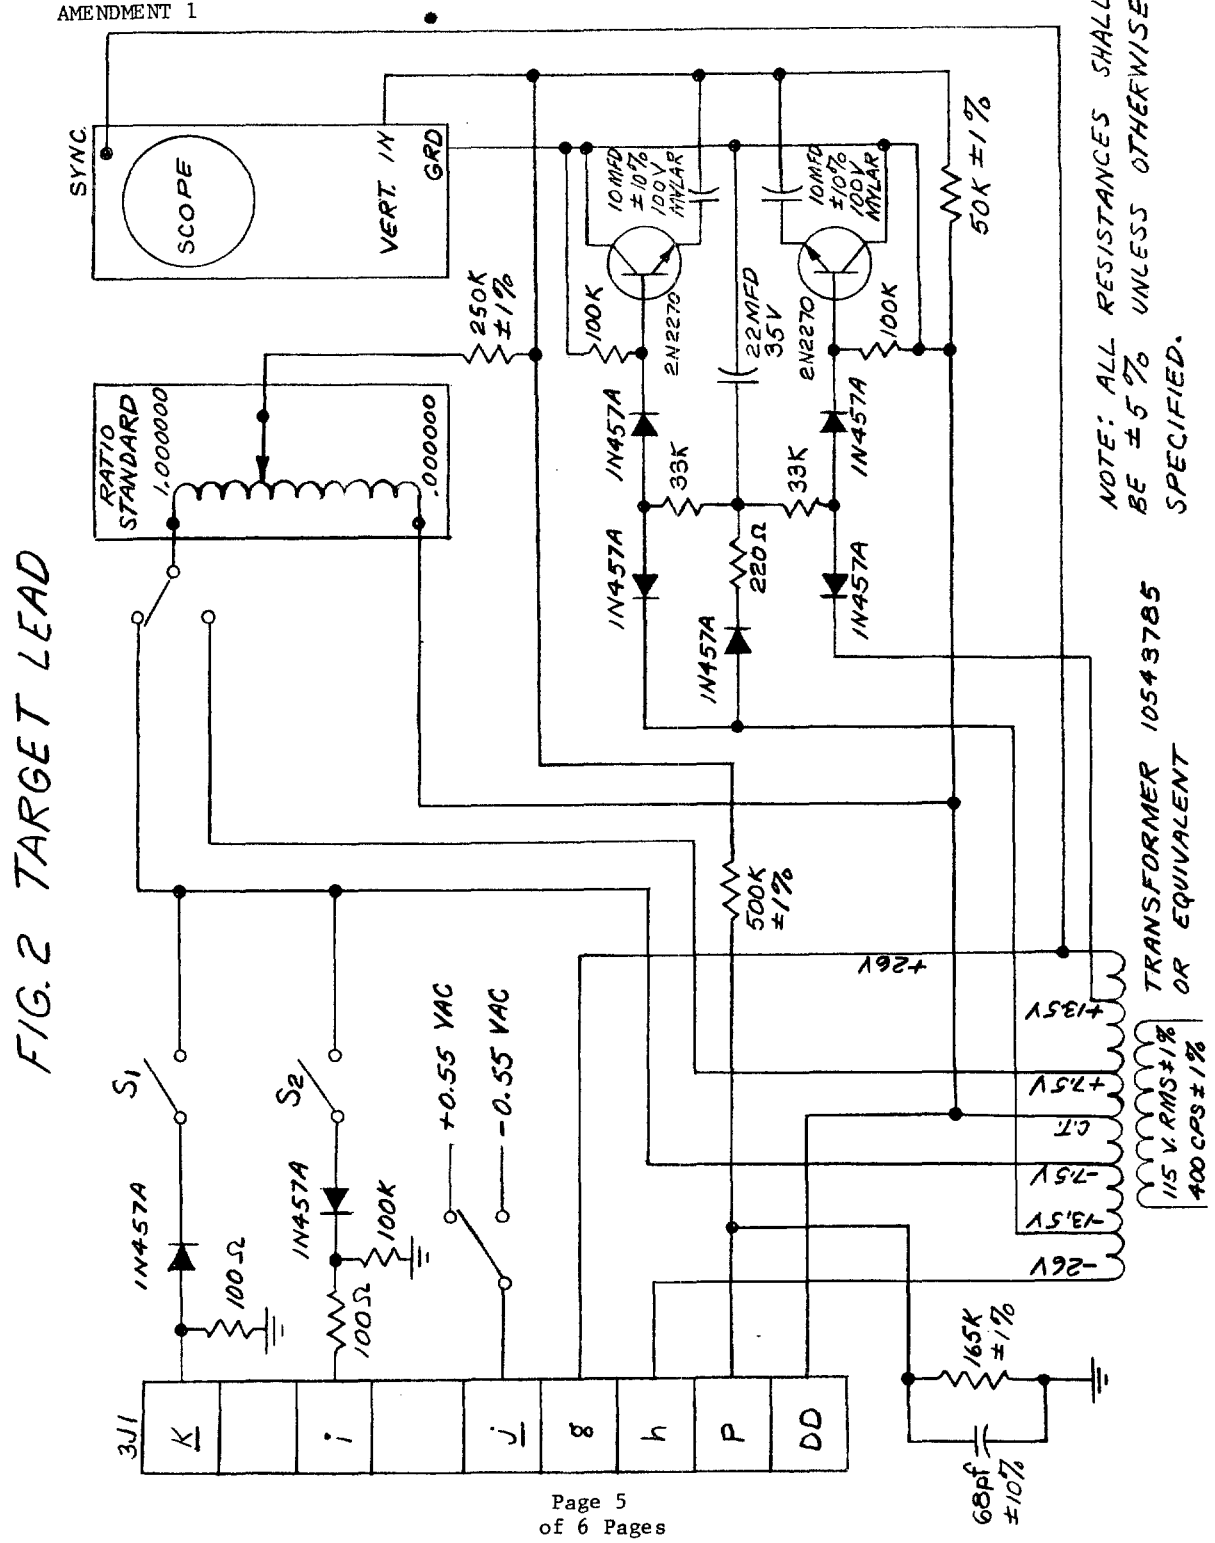


FIG. 2 TARGET LEAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

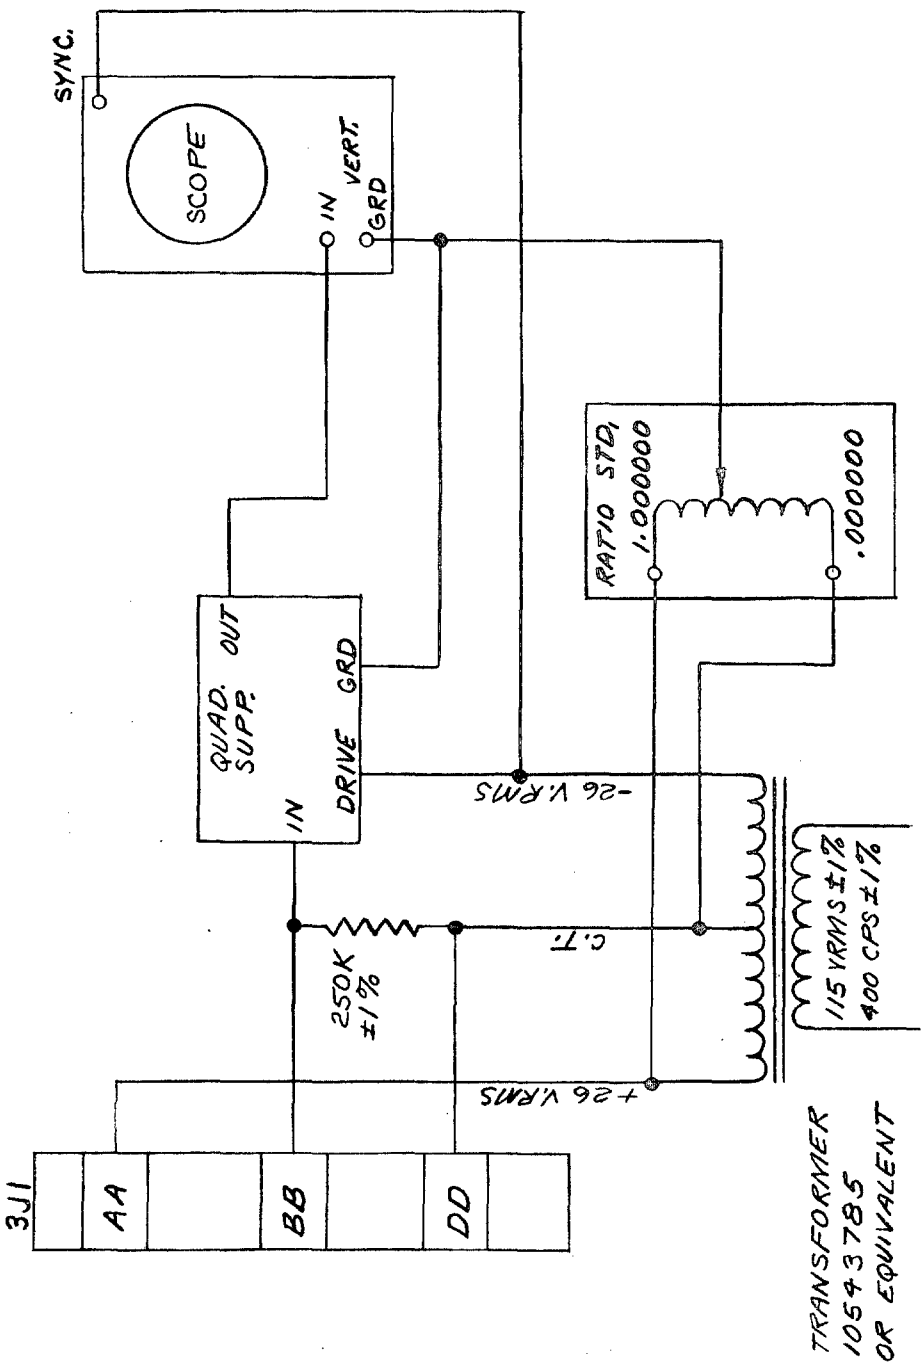


FIG. 5 RANGE OUTPUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.