
INCH-POUND
MIL-C-55302/142B
17 November 1988
SUPERSEDING
MIL-C-55302/142A
18 December 1984

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES RECEPTACLE WITH SOCKET CONTACTS, FOR PRINTED WIRING BOARDS (100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

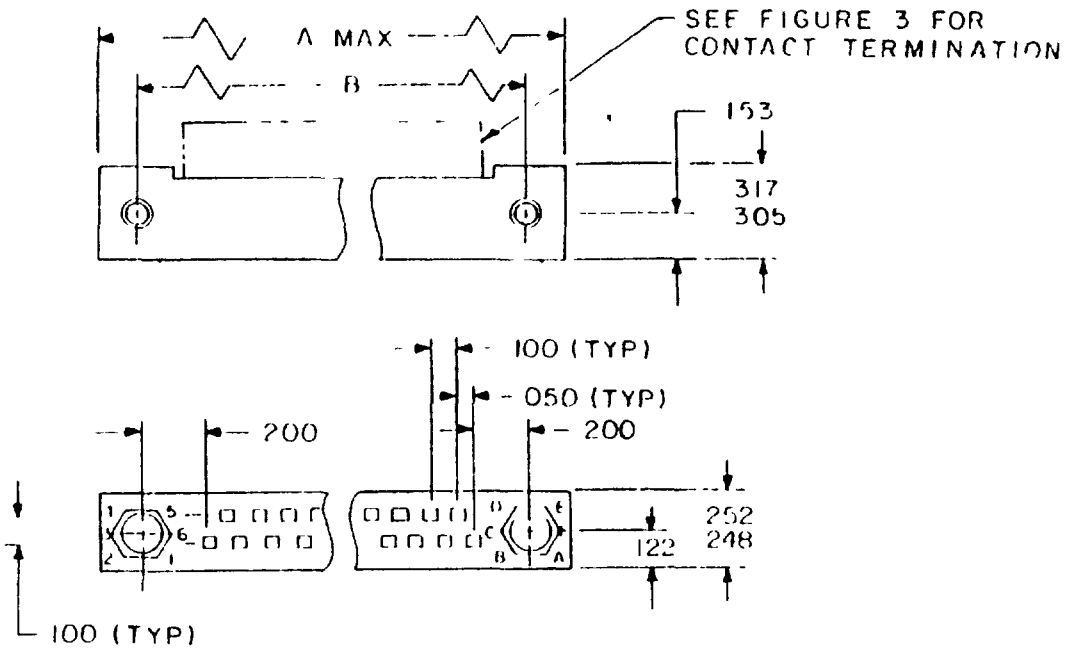

Inches	mm	Inches	mm
.050	1.27	.248	6.30
.100	2.54	.252	6.40
.122	3.10	.305	7.45
.153	3.89	.317	8.05
.200	5.08		

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ± 005 (0 13 mm).


FIGURE 1. Connector, receptacle (.100 inch spacing)

AMSC N/A FSC 5935


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-02-22122:322
Check the source to verify that this is the current version before use.

TABLE I Arrangements and characteristics

Contact arrangement	No of contacts	Dimensions (inches) A Max	Dimensions (inches) B ± 006
M55302/142A	17	1 516 ('38 50)	1 200 (30.48)
M55302/142B	29	2 114 (58 70)	1.80 (45.7)
M55302/142C	33	2.314 (58.80)	2.000 (50 80)
M55302/142D	41	2.716 (69.00)	2 400 (60.96)
M55302/142E	53	3.315 (84 20)	3.000 (76.20)
M55302/142F	65	3 917 (99.50)	3 60 (91.44)

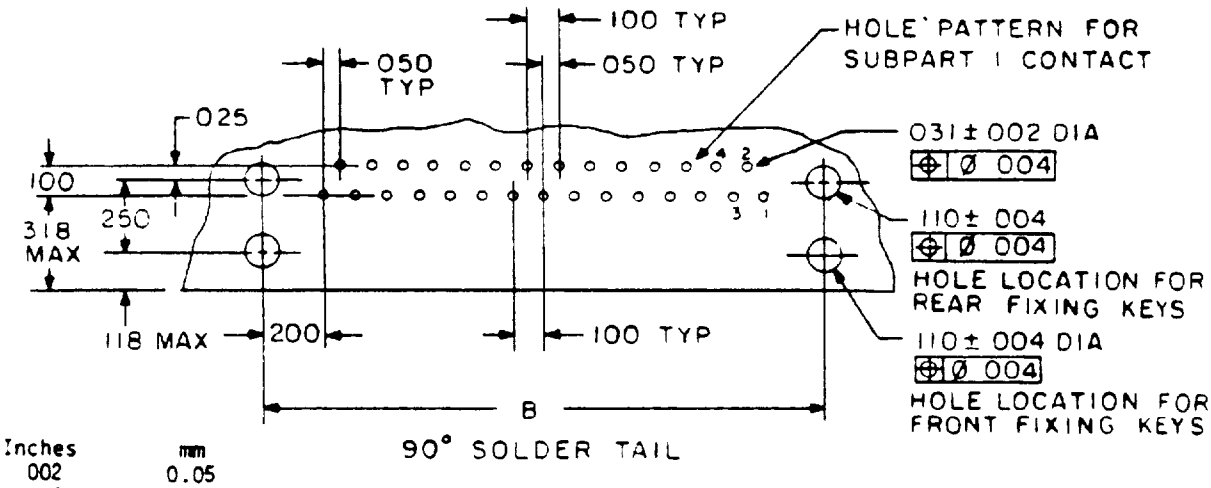


Inches	mm
002	0.05
004	0.10
008	0 20
.025	0.64
.031	0.79
050	1.27

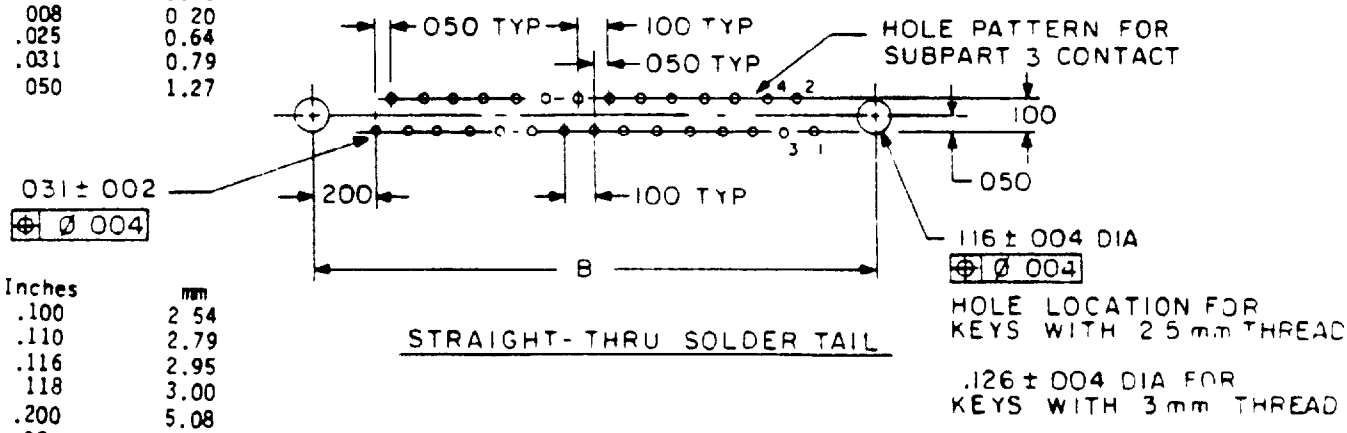

Inches	mm
.100	2 54
.110	2.79
.116	2.95
118	3.00
.200	5.08
250	6.35
318	8 08

FIGURE 2 Recommended hole patterns


Source: https://assist.dla.mil -- Downloaded: 2026l0-22T22:52Z
Check the source to verify that this is the currentversion before use.

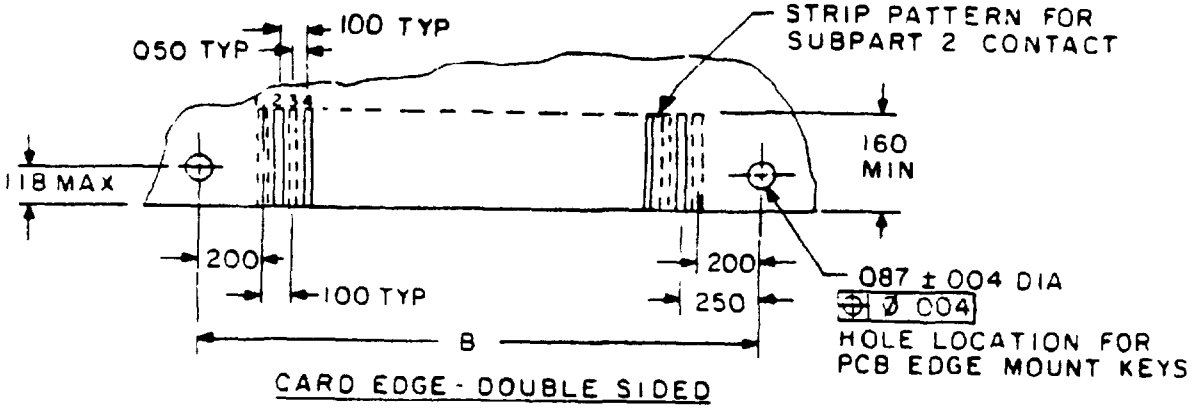


NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses.

FIGURE 2. Recommended hole patterns - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:52Z
Check the source to verify that this is the current version before use.




Part number
M55302/142A




Part number
M55302/142B




Part number
M55302/142C



Part number
M55302/142D




Part number
M55302/142E




Part number
M55302/142F

FIGURE 3 Contact arrangements and keying configurations


Source: https://assist.dla.mil -- Downloaded: 202640-22T22:52Z
Check the source to verify that this is the current version before use.

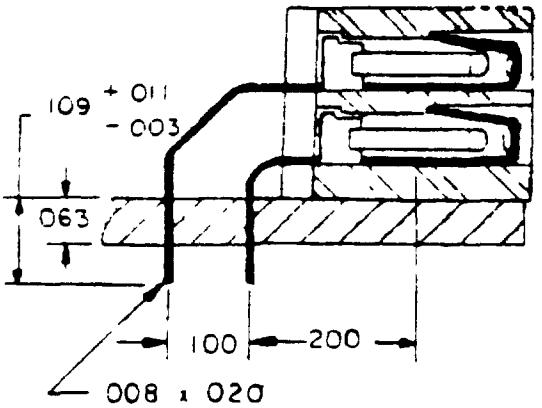


Subpart 1
30° Solder tails

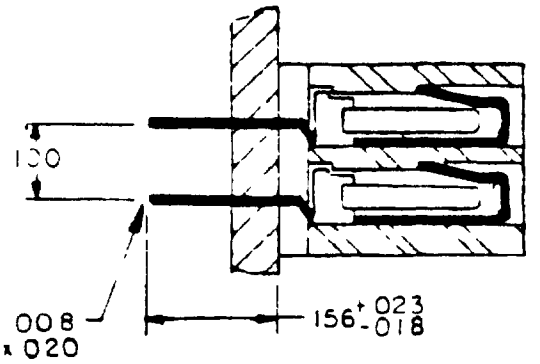


Subpart 3
Solder tails

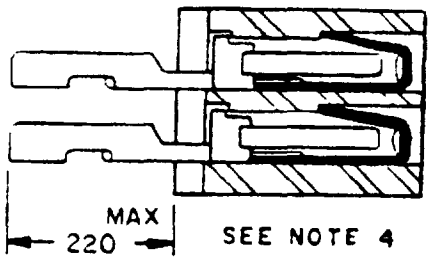


Subpart 4
Solder terminals

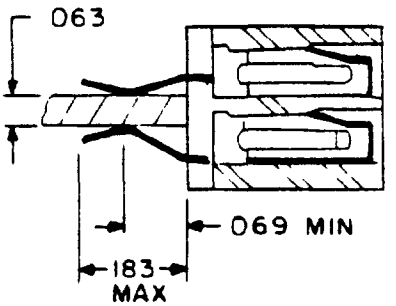


Subpart 2
Card edge

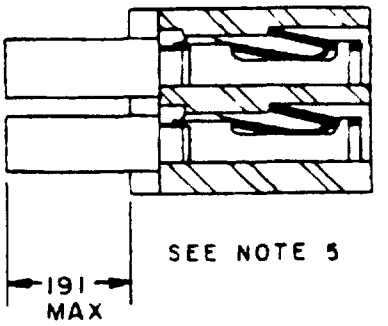

Subpart 5
Crimp 24-28 AWG

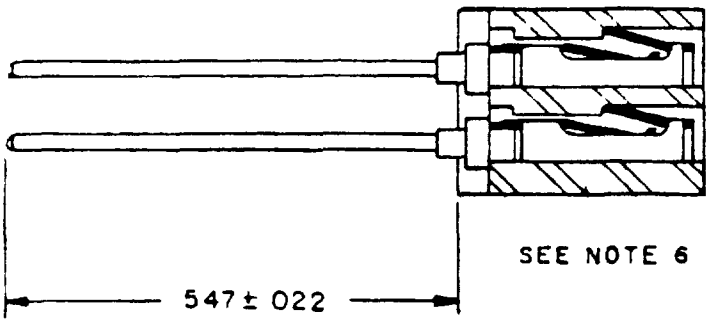

Subpart 6
Wire wrappost

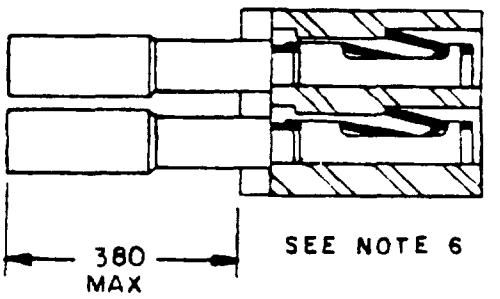


Subpart 7 SEE NOTE 4
Crimp 22 AWG

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no 22-26 AWG wires.
6. Contact with .025 (0.64 mm) wrappost in accordance with MIL-STD-1130.


Inches	mm	Inches	mm
003	0 08	100	2 54
008	0 20	109	2 77
011	0 28	156	3 96
018	0 46	183	4 65
020	0 51	191	4 85
022	0 56	200	5 08
023	0 58	220	5 59
063	1 60	380	9 65
069	1 75	547	13 89

FIGURE 4. Connector terminations.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:52Z
Check the source to verify that this is the current version before use.

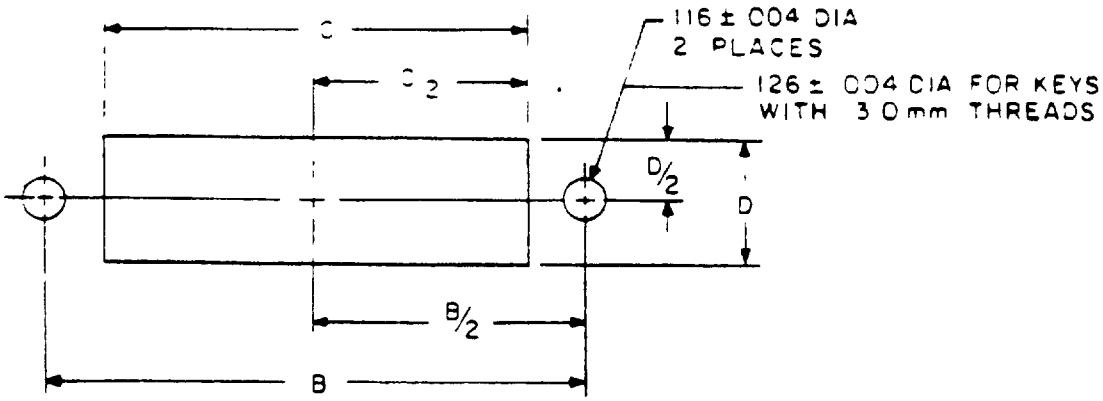

FIXED MOUNT

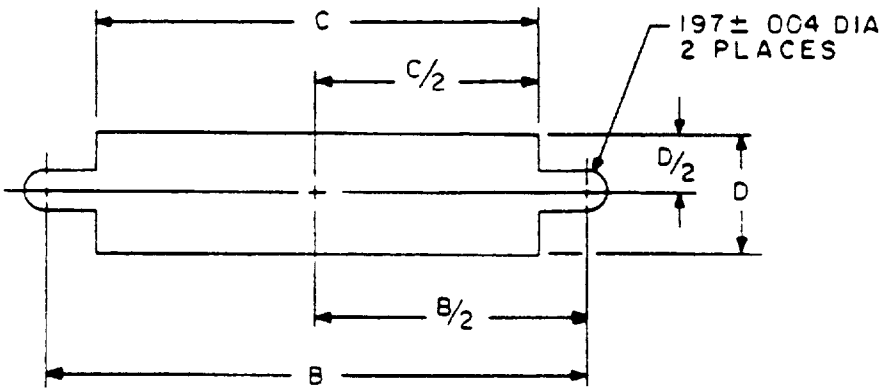


FLOATING MOUNT

Number of Contacts	17	29	33	41	53	65
B ±.008 (±0.20)	1.200 (30.48)	1.800 (45.72)	2.000 (50.80)	2.400 (60.96)	3.000 (76.20)	3.600 (91.44)
C Min.	1.020 (25.91)	1.618 (41.10)	1.819 (46.20)	2.221 (56.41)	2.819 (71.60)	3.422 (86.92)
D Min.	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	374 (9.45)


NOTES:
1 Dimensions are in inches.
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4 Floating mount panel thickness .085 (2.15 mm) maximum.

FIGURE 5 Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

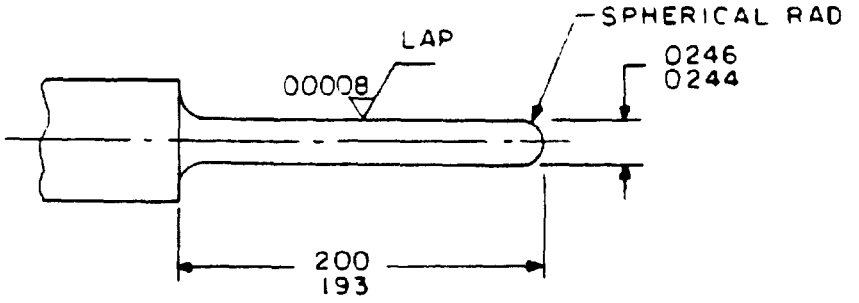

TEST PIN A

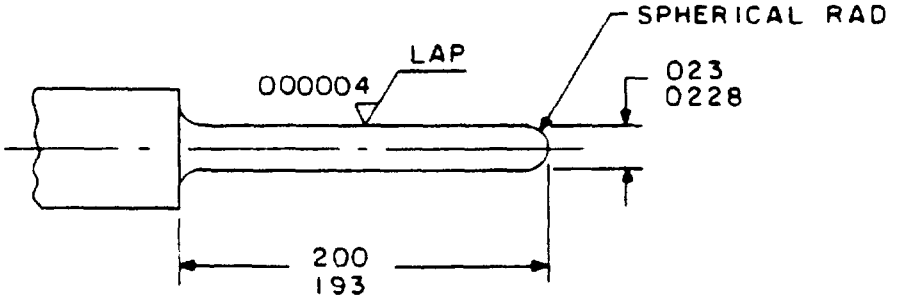

TEST PIN B

Material Tool steel

FIGURE 6 Test pins

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration See figures 1 through 5 and table I

Contact identification See figure 3.

Contact retention 4 pounds minimum for each contact

Contact engagement. 0.7 ounce minimum, 3.6 ounces maximum.

Contact separation 0.5 ounce minimum. Use the following test procedure

a. Insert and withdraw test pin "A" (see figure 6)

b. Insert test pin "B" (see figure 6) fully, then withdraw the pin and measure the separation force

Contact resistance· Shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level 1,000 V rms, 60 Hz

High altitude 300 V rms, 60 Hz.

Current rating, maximum: 3.0 amperes.

Keying socket: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed in accordance with M55302/154. Connectors are supplied with keying pins in the "1" and "A" positions, except for 1/4-turn locking styles, which are keyed in "F" and "6" positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Crimping tools (for subparts 4 and 6):

Basic tool. M22520/2-01.

Positioner· M22520/2-36.

Removal tool See M81969/40-01.

Hood types See MIL-C-55302/155.

Mounting hardware See MIL-C-55302/154.

Mating connectors: Shall conform to MIL-C-55302/140.

Retention clip: Optional.

Oversize pin exclusion test: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows

Example

M55302/142	*	*	N	1	*

- M55302/142 — Specification sheet number; Receptacle with socket contacts
- * — Contact arrangement (see figure 3)
- * — Contact type - 3.0 amperes (see figure 4)
- N — Contact type - Coaxial; N - not applicable
- 1 — Indexing type; 1 - Hexagon post (36 positions)
- * — Mounting hardware (see MIL-C-55302/154)

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities
Army - ME
Navy - MC
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3652-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.