INCH-POUND
MIL-C-55302/31H
31 October 1988
SUPERSEDING
MIL-C-55302/31G
25 February 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: KEYING ACCESSORIES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the key accessories described herein shall consist of this document and the latest issue of MIL-C-55302.

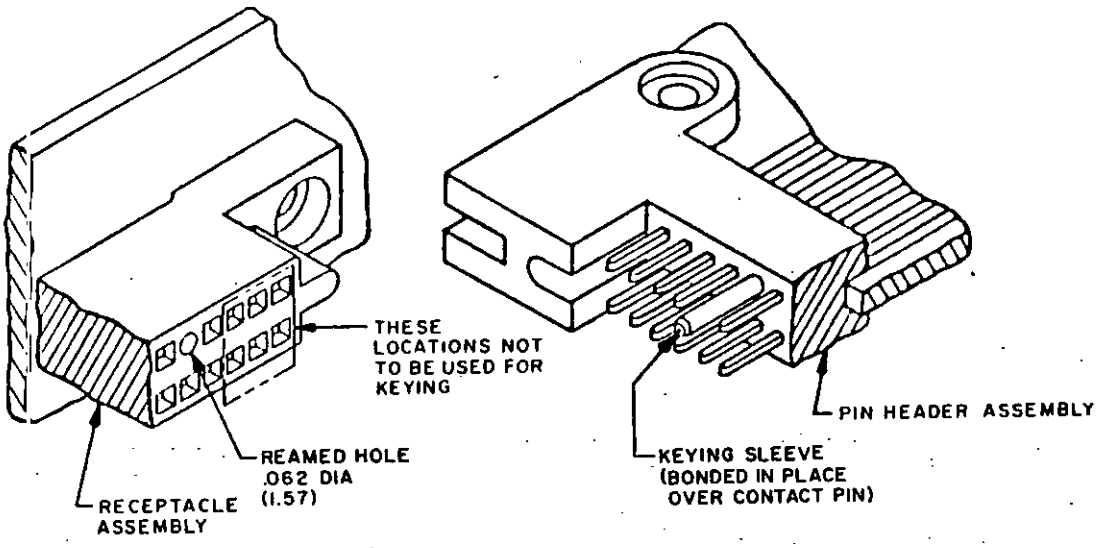


FIGURE 1. Installation of keying sleeve.

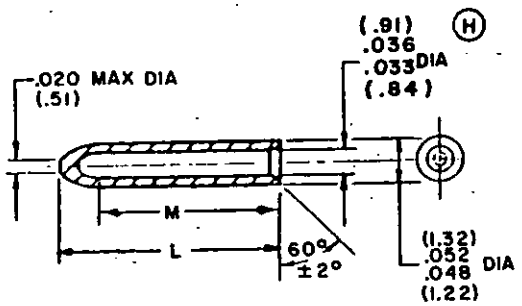


FIGURE 2. Keying sleeve.

Ⓗ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

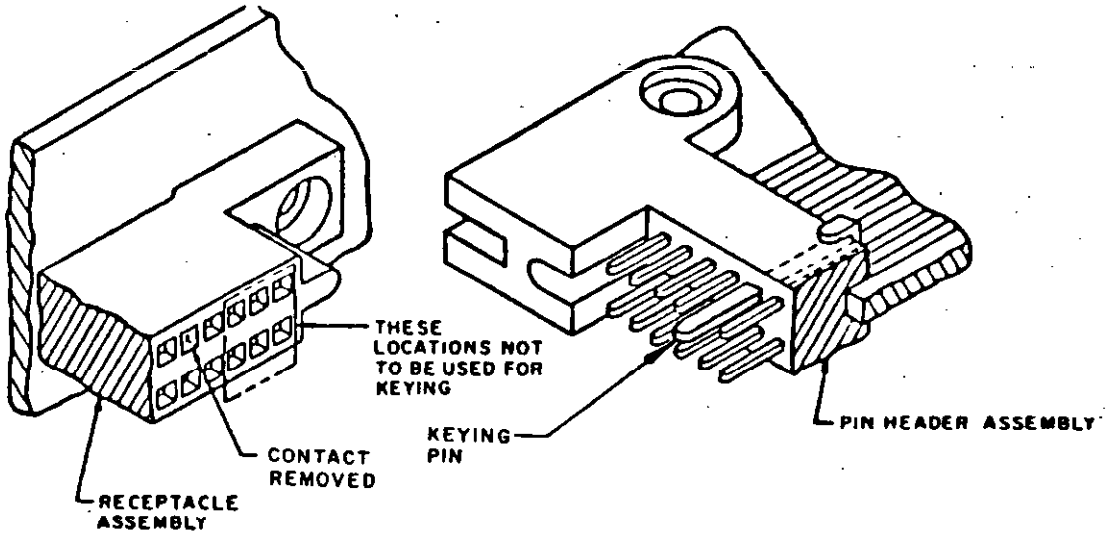


FIGURE 3. Installation of keying pin.

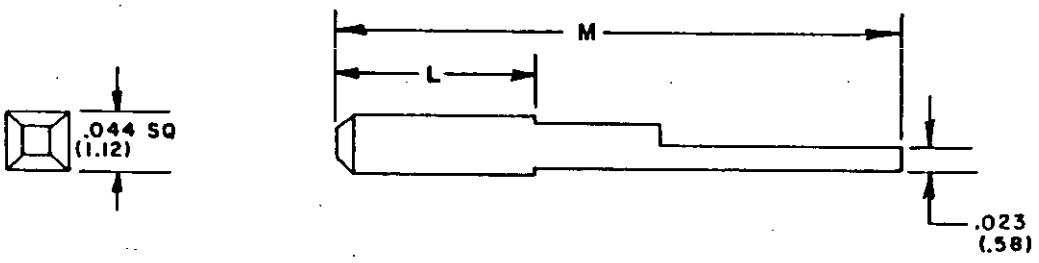


FIGURE 4. Keying pin.

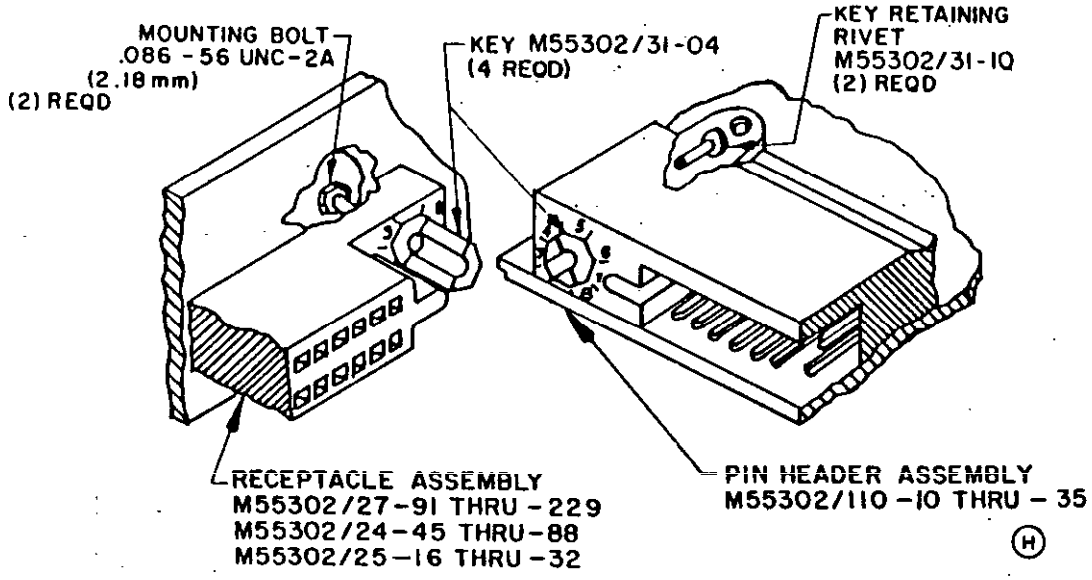


FIGURE 5. Installation of external key (position 6 shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

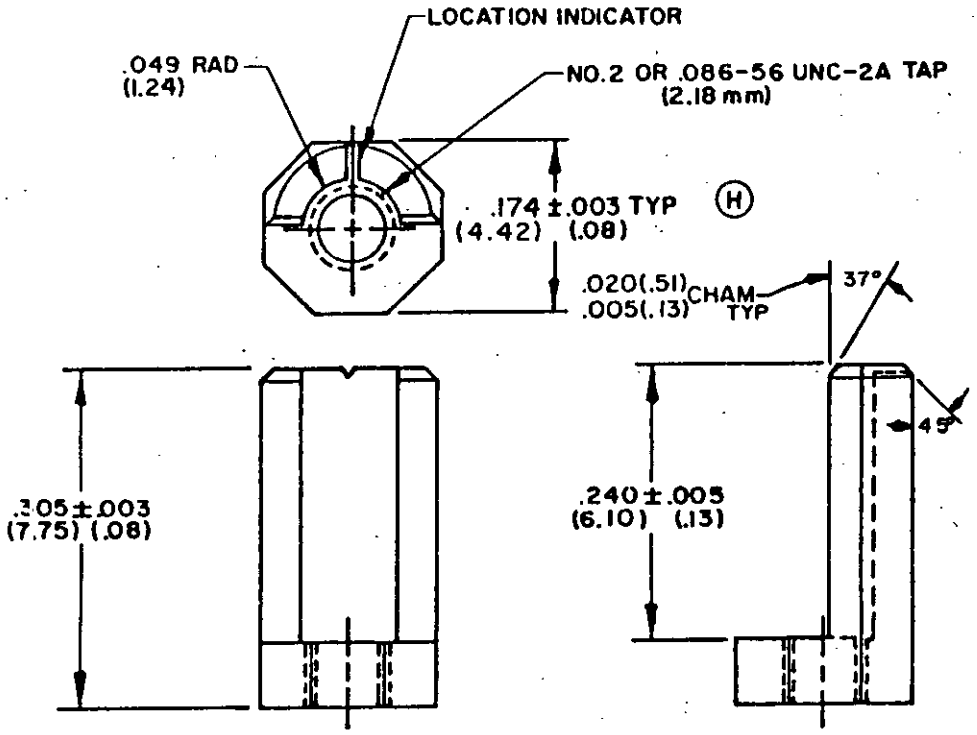


FIGURE 6. External key, M55302/31-04.

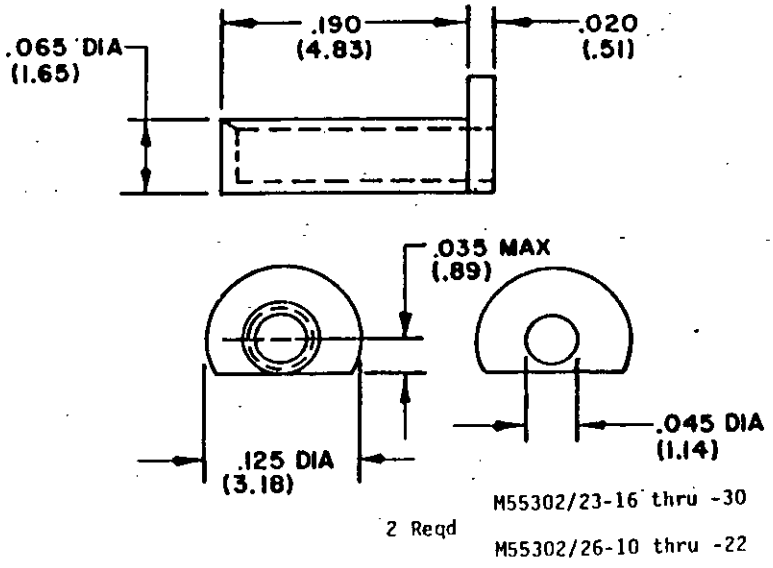


FIGURE 7. Retaining rivet for external key, M55302/31-05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

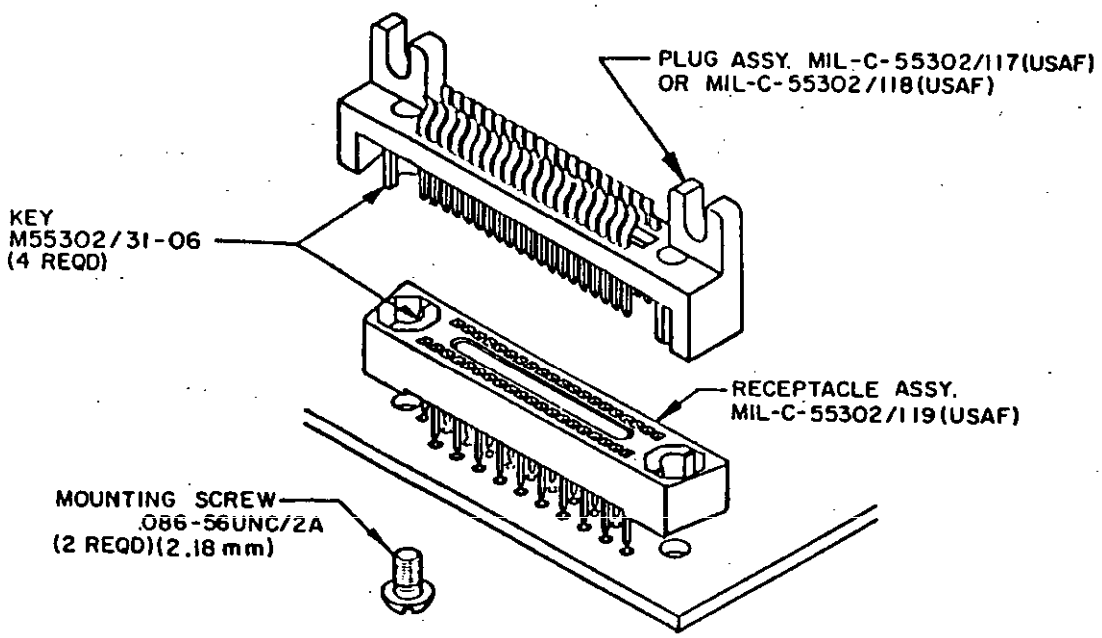


FIGURE 8. Installation of external key.

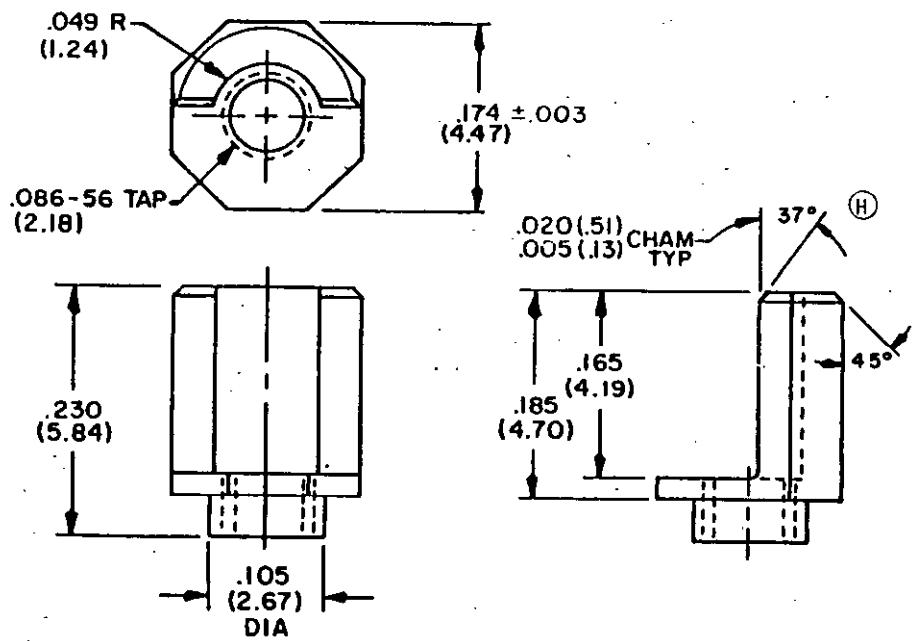


FIGURE 9. External key, M55302/31-06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

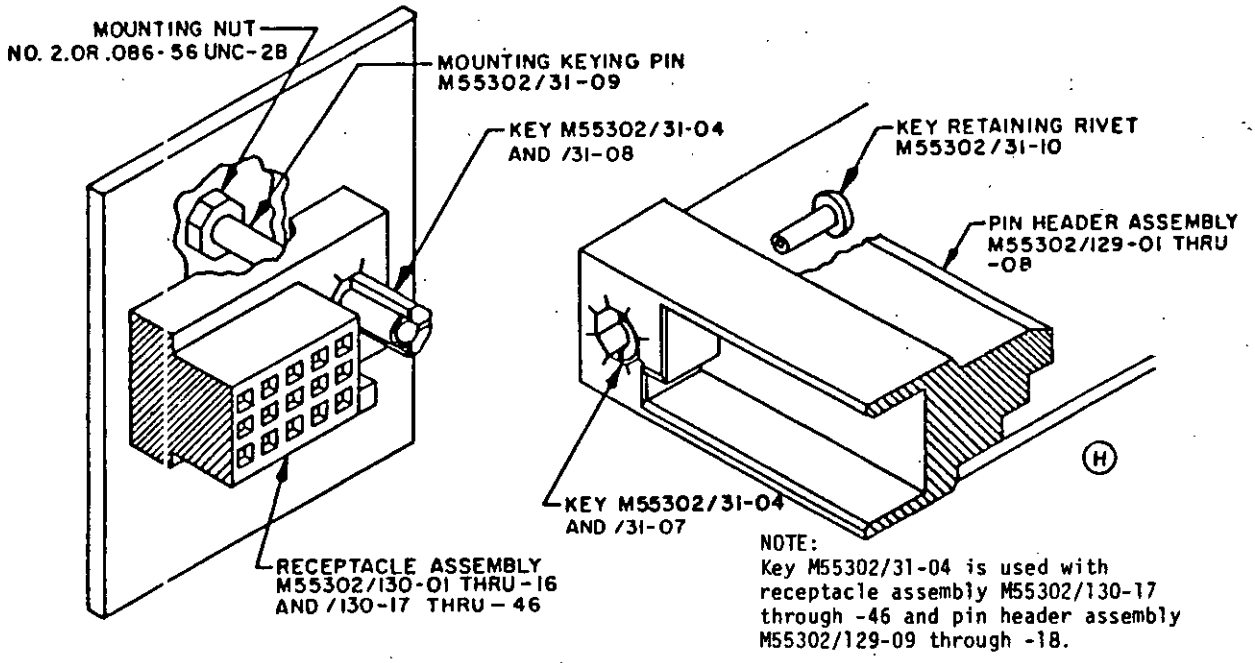


FIGURE 10. Installation of external key.

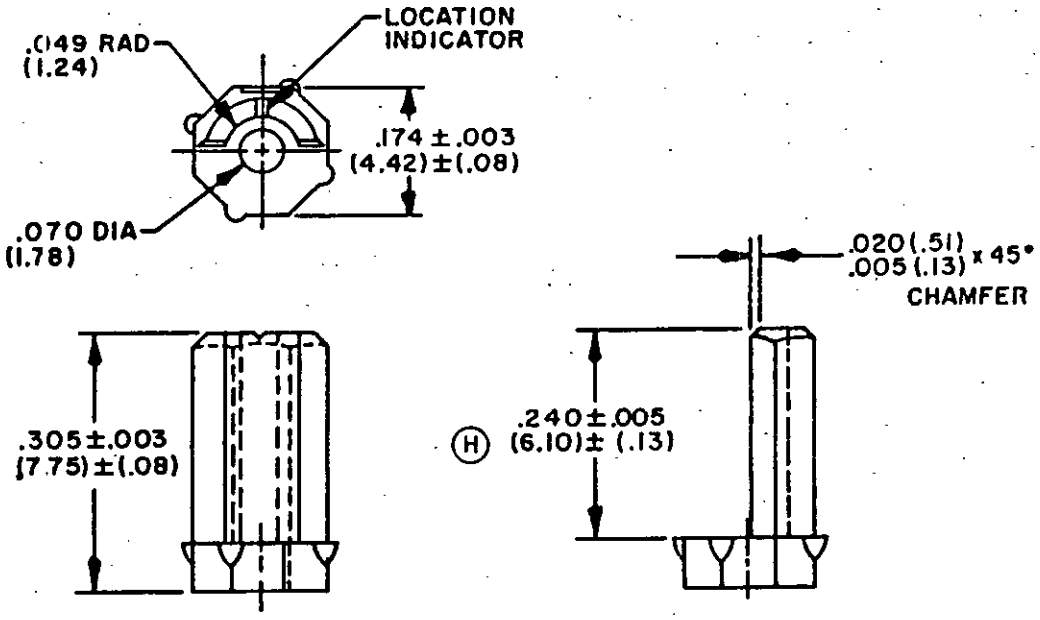


FIGURE 11. External key, M55302/31-07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

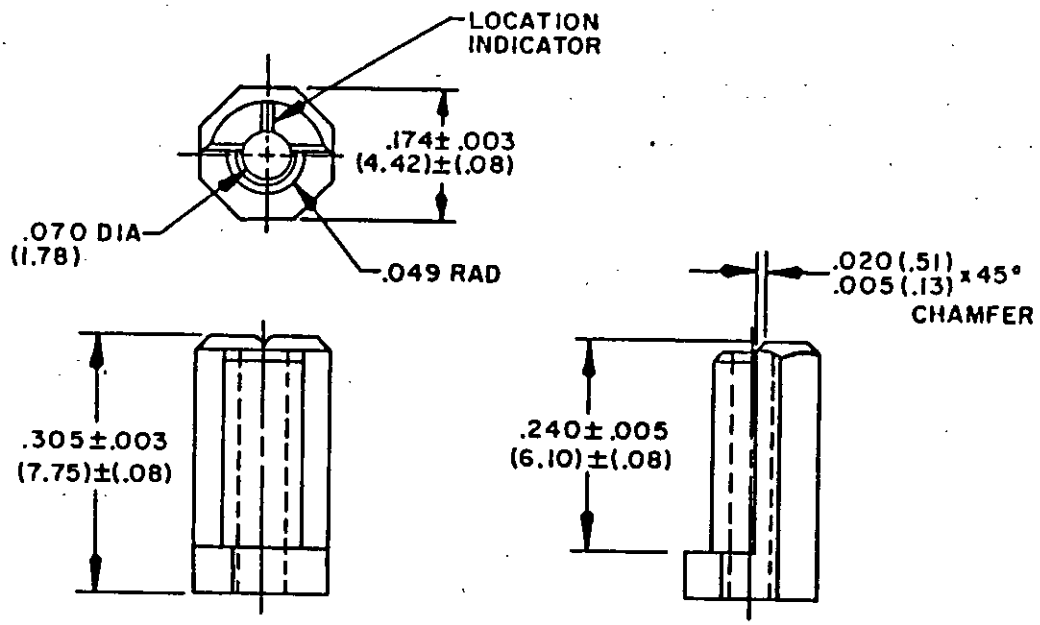


FIGURE 12. External key, M55302/31-08.

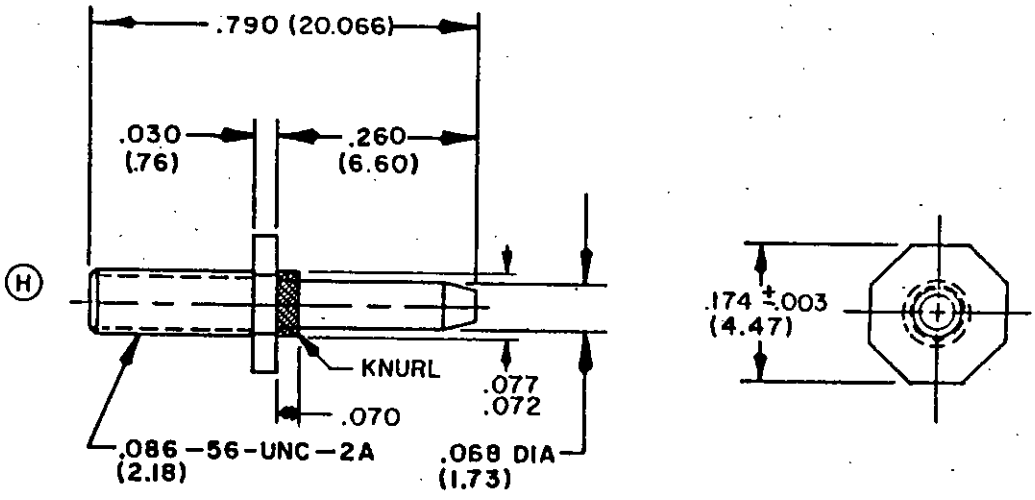


FIGURE 13. Mounting/keying pin, M55302/31-09.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

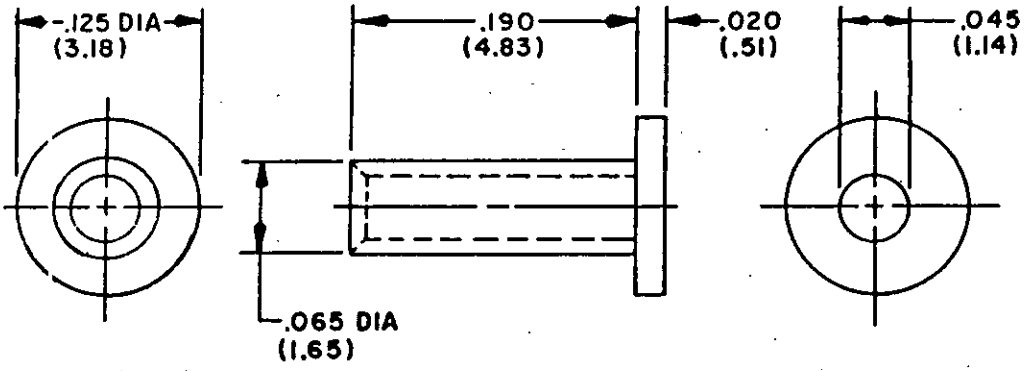


FIGURE 14. Retaining rivet for external key, M55302/31-10.

TABLE I.

Type	Key part number	L	M	Figure
I	M55302/31-01	.305 (7.75)	.240 Min (6.10)	1, 2
I	M55302/31-02	.250 (6.35)	.225 Min (5.72)	1, 2
II	M55302/31-03	.227 (5.77)	.700 ±.015 (17.78) (.38)	3, 4
III	M55302/31-04	---	---	5, 6
III	M55302/31-05	---	---	5, 7
III	M55302/31-06	---	---	8, 9
IV	M55302/31-07	---	---	10,11
IV	M55302/31-08	---	---	10,12
IV	M55302/31-09	---	---	10,13
IV	M55302/31-10	---	---	10,14

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses.

FIGURE 15. Notes and table for figures 1 through 14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and configuration: See figures 1 through 14.

Material:

Types I and II: Brass per QQ-B-626.

Types III:

Key: Stainless steel per QQ-S-763.

Rivet: Brass per QQ-B-626.

Type IV:

Key: Glass filled polyester per MIL-M-24519 type GPT-30F.

Mounting/keying pin: Stainless steel per QQ-S-763.

Finish:

Types I and II: Nickel per QQ-N-290.

Type III:

Key: Passivate per QQ-P-35

Rivet: Nickel per QQ-N-290.

Type IV: Mounting/keying pin - Passivate per QQ-P-35.

Application:

Types I and II: This keying shall be used with connectors, as defined in MIL-C-555302/23, MIL-C-55302/24, MIL-C-55302/25, MIL-C-55302/26 and MIL-C-55302/27.

Ⓗ Type III: This keying shall be used with connectors, M55302/27-91 through M55302/27-229; M55302/110-10 through M55302/110-35, M55302/117-01 through M55302/117-11; M55302/118-01 through M55302/118-11; and M55302/119-01 through M53302/119-11, M55302/129-09 through M55302/129-18 and M55302/130-17 through M55302/130-46.

Type IV: This keying shall be used with MIL-C-55302/110, MIL-C-55302/129 and MIL-C-55302/130.

Installation:

Type I: For receptacle assemblies MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, remove contact and ream cavity to .062 inch diameter hole. For plug assemblies MIL-C-55302/23 or MIL-C-55302/26-, bond keying sleeve with 3M adhesive (EC-2216 or equivalent) in place over contact. (See figure 1).

Ⓗ Type II: For receptacle assemblies MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, remove contact. For plug assemblies MIL-C-55302/23, MIL-C-55302/26, remove contact and insert keying pin as shown. Secure in place by bending tail over outside edge of housing. Trim excess material. (See figure 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

Recommended keying:

Types I and II: Two keys of same type located on oposite ends of connector excluding first six contacts on each end.

Types III and IV (-04, -05 and -10): See figures 5 and 10.

Receptacle assembly: For part numbers M55302/27-91 through M55302/27-229, M55032/24-45 through M55302/24-88, M55302/25-16 through M55302/25-32, and M55302/130-17 through M55302/130-46, place key (-04) in numbered position as indicated by location slot (position 6 shown) and secure in place with .086 - 56 screw inserted through printed circuit board.

(H) Plug assembly: For part numbers M55302/129-09 through M55302/129-18, M55302/110-10 through M55302/110-35, M55302/23-16 through M55302/23-30 and M55302/26-10 through M55302/26-22, place key (-04) in the identically numbered position as indicated by location slot (position 6 shown) and secure in place with rivet M55302/31-05 or M55302/31-10, using AMP tool part number 91117-1, 911173 or equivalent.

Type III (-06): See figure 8.

Receptacle assembly: For part numbers M55302/119-01 through M55302/119-11, place key (-06) in one of the eight possible locations and press fit into mounting hole; then secure in place with .086 - 56 screw inserted through printed circuit board.

(H) Plug assembly: For part numbers M55302/117-01 through M55302/117-11, or M55302/118-01 through M55302/118-11, place key (-06) in the identical position as the receptacle (M55302/119-01 through M55302/119-08) and press fit into mounting hole.

Type IV (-07, -08, and -09): See figure 10.

(H) Receptacle assembly: For part numbers M55302/130-01 through M55302/130-16, mount connector to printed circuit board with mounting/key pin (-09) and secure with mounting nut. Place key (-08) over pin and press fit in to one of the eight possible locations.

Plug assembly: For part numbers M55302/129-01 through M55302/129-08, place key (-07) in the identical position as the receptacle (M55302/130-01 through M55302/130-16) and secure in place with rivet M55302/31-10 using AMP tool part number 91117-3 or equivalent.

Part number: M55302/31- (and dash number from table I).

Visual and mechanical inspections, required in accordance with MIL-C-55302.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS, OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3645-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.