
MILITARY SPECIFICATION SHEET

VALVE, SAMPLING AND BLEED, HYDRAULIC, TYPE II SYSTEMS

NPTF FITTING

This specification is approved for use by the USA Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the valve described herein shall consist of this document and the latest issue in effect of specification MIL-V-81940.

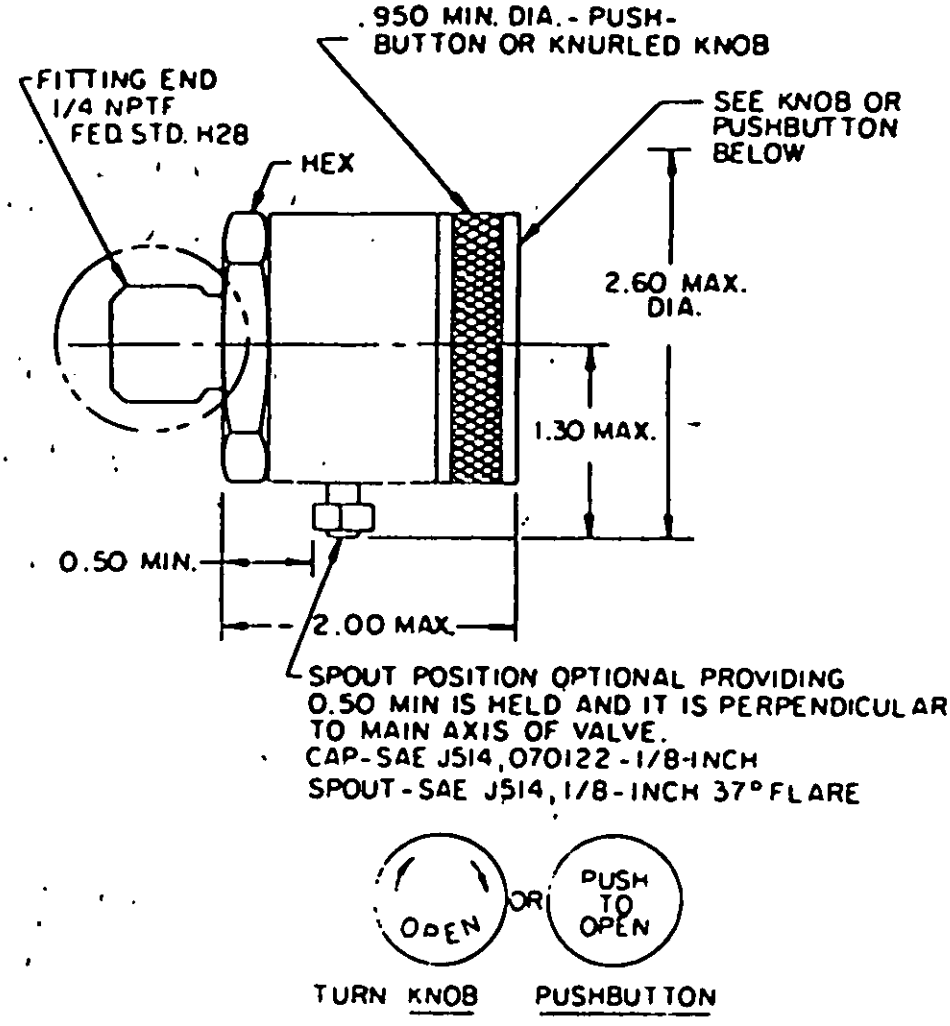

X-4103

FIGURE 1. Valve (NPTF Fitting).

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches, unless otherwise specified. See figure 1.
2. Tolerances, decimals ± .010, angles ± 1 degree.
3. Unless otherwise specified, surface roughness shall not exceed 125 microinches, per MIL-STD-10. Remove all burrs and break sharp edges .005 minimum.
4. Material shall be in accordance with the procurement specification.

REQUIREMENTS:

1. The valves supplied under this military specification sheet shall conform to MIL-V-81940 of the latest issue in effect on date of invitation for bid or request for proposal, except, the proof pressure may be 600 psi, the leakage and valve operating pressure may be 300 psi, and the impulse operating pressure may be 300 psi.
2. Valve shall be actuated by a rotary type knob or push button. Release of the knob or button shall automatically return the valve to the closed position. The rotary type knob shall be fully opened with a maximum rotation of 180 degrees. The valve knob or button return mechanism shall be independent of the valve poppet allowing the valve poppet to close automatically by fluid pressure upon release or failure of the knob or button return mechanism.
3. Torque required to actuate the rotary knob type valve to a full open position shall not exceed 10 inch-pounds with operating pressure applied to the valve inlet.
4. Force required to actuate the push button type valve to a full open position shall not exceed 25 pounds with operating pressure on applied to the valve inlet.
5. Valve shall have a protective cap with secondary sealing provisions. Protective cap shall include a security chain or equivalent to prevent loss of the cap.
6. Valves qualified under MIL-V-81940 that differ only in the threaded terminations will be acceptable under this slash sheet.
7. Part Number: The part number consists of the basic number of this specification sheet plus a dash number indicating end fitting.

   M81940/2-1 Valve with 1/4 inch NPTF fitting.

8. In addition to the marking required in the basic specification the marking of valves that are limited to 300 psi operating pressure shall include "NOT FOR AEROSPACE APPLICATIONS".

INTENDED USE: This valve is intended for ground equipment application and is not intended for aerospace applications. See MIL-V-81940/1 for aerospace applications.

Custodian:
Army - ME

Review Interest
Army - AT

Preparing activity:
Army - ME

Project 1650-A104

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.