INCH-POUND


MIL-DTL-81940/3A
17 October 2019
SUPERSEDING
MIL-V-81940/3(ME)
15 December 1983

DETAIL SPECIFICATION SHEET

VALVE, SAMPLING AND BLEED, HYDRAULIC, TYPE II SYSTEMS 37 DEGREE FLARE FITTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-81940.

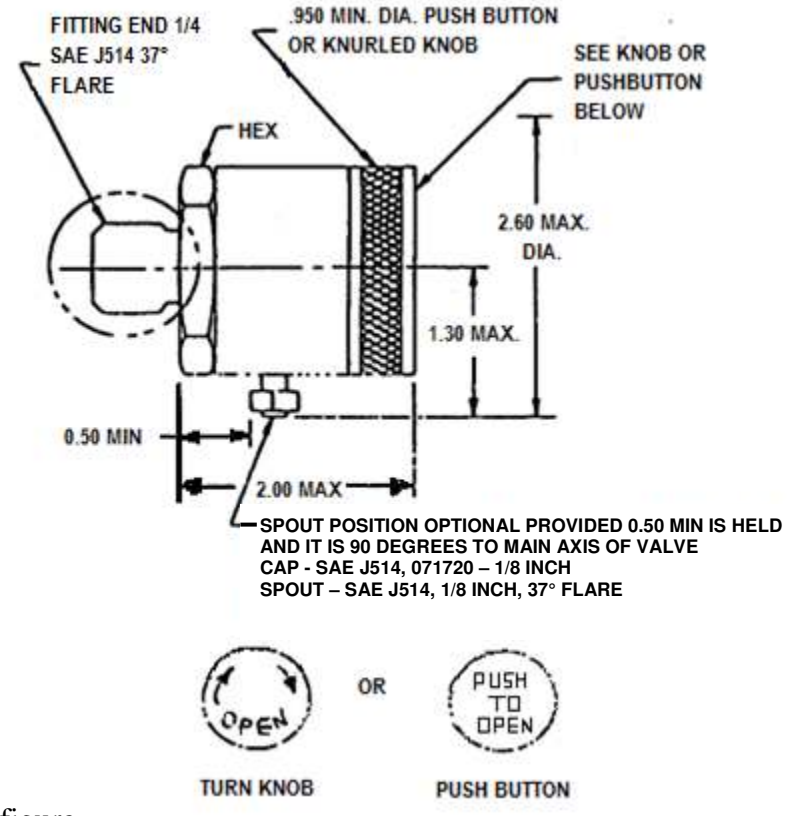

See notes at end of figure.

FIGURE 1. Valve (37º flare fitting).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches, unless otherwise specified. See figure 1.

2. Tolerance, decimals ±0.010, angles ±1 degree.

3. Unless otherwise specified, surface roughness shall not exceed 125 microinches Ra, per ASME B46.1. Remove all burrs and break sharp edges 0.005 minimum.

4. Material shall be in accordance with the procurement specification.

REQUIREMENTS:

1. The valves supplied under this military specification sheet shall conform to MIL-DTL-81940 of the latest issue in effect on date of invitation for bid or request for proposal, except, the proof pressure may be 600 psi, the leakage and valve operating pressure may be 300 psi, and the impulse operating pressure may be 300 psi.

2. Valve shall be actuated by a rotary type knob or push button. Release of the knob or button shall automatically return the valve to the closed position. The rotary type knob shall be fully opened with a maximum rotation of 180 degrees. The valve knob or button return mechanism shall be independent of the valve poppet allowing the valve poppet to close automatically by fluid pressure upon release or failure of the knob or button return mechanism.

3. Torque required to actuate the rotary knob type valve to a full open position shall not exceed 10 inch-pounds with operating psi pressure applied to the valve inlet.

4. Force required to actuate the push button type valve to a full open position shall not exceed 25 pounds with operating pressure applied to the valve inlet.

5. Valve shall have a protective cap with secondary sealing provisions. Protective cap shall include a security chain or equivalent to prevent loss of the cap.

6. Valves qualified under MIL-DTL-81940 that differ only in the threaded terminations will be acceptable under this slash sheet.

7. The Part or Identifying Number (PIN) consists of an “M” prefix followed by the basic number of this specification sheet and a dash number indicating the end fitting

M81940/3-1 Valve with ¼ inch 37º fitting.

8. In addition to the marking required in the basic specification, the marking of valves that are limited to 300 psi operating pressure shall include "NOT FOR AEROSPACE APPLICATIONS".

INTENDED USE: This valve is intended for ground equipment applications and is not intended for aerospace applications. See MIL-DTL-81940/1 for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations, unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Referenced documents. In addition to MIL-DTL-81940, this document references the following:

ASME B46.1
SAE J514
MIL-DTL-81940/1

CONCLUDING MATERIAL

Custodians:
Army - CR4
Navy - AS

Preparing activity:
Navy - AS

(Project 4820-2019-007)

Review activity:
Army - AT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.