INCH-POUND
MIL-V-0081940/4A(SH)
25 February 1992
USED IN LIEU OF
MIL-V-81940/4
14 December 1990

MILITARY SPECIFICATION SHEET

VALVE, SAMPLING AND BLEED, HYDRAULIC, 3,000 PSI
NON-AIRCRAFT APPLICATIONS

This specification is approved for use by the Naval Sea Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-V-81940/4. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may used in acquisition.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-V-81940.

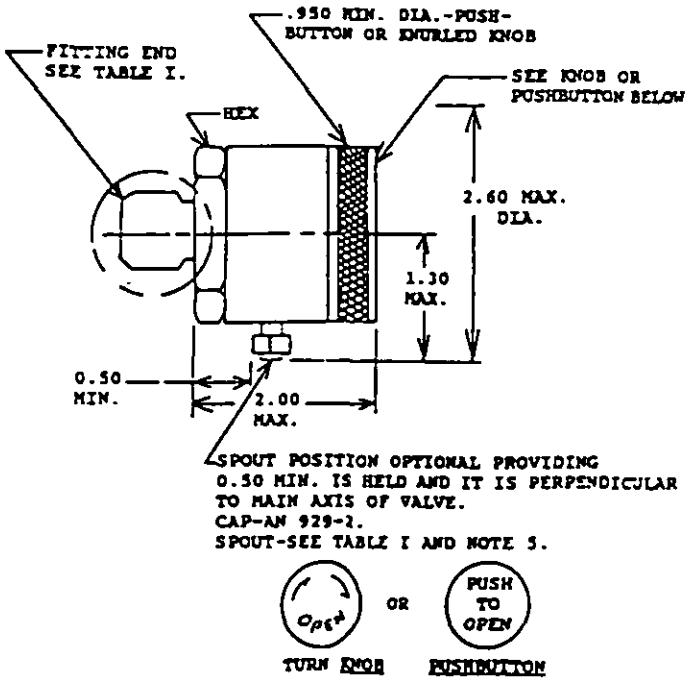


FIGURE 1. Valve.

AMSC N/A FSC 4810
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:27Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches unless otherwise specified (see figure 1).
2. Tolerances: Decimals plus or minus 0.010, angle plus or minus 1 degree.
3. Unless otherwise specified, surface roughness shall not exceed 125 microinches in accordance with MIL-STD-10. Remove all burrs and break sharp edges 0.005 minimum.
4. Material shall be in accordance with MIL-V-81940.
5. The spout shall conform to the latest issue of the applicable standard, except the bore may be up to 0.103 inches in diameter.

REQUIREMENTS:

1. The valve shall be actuated by a rotary type knob or push button. Release of the knob or button shall automatically return the valve to the closed position. The rotary type knob shall be fully opened with a maximum rotation of 180 degrees. The valve knob or button return mechanism shall be independent of the valve poppet allowing the valve poppet to close automatically by fluid pressure upon release or failure of the knob or button return mechanism.
2. Torque required to actuate the rotary knob type valve to a fully open position shall not exceed 10 inch-pounds with an operating pressure of 3,000 pounds per square inch (lb/in^2) applied to the valve inlet.
3. Force required to actuate push button type valve to a fully open position shall not exceed 25 pounds with an operating pressure of 3,000 lb/in^2 applied to the valve inlet.
4. Valve shall have a protective cap with secondary sealing provisions. Protective cap shall include a security chain or equivalent to prevent loss of cap.
5. The part number shall consist of the basic number of this specification sheet plus a dash number indicating end fitting and spout as specified in table I.

TABLE I. Part number construction.

Part no.	Fitting	Spout
M81940/4-1	SAE J514 FIG. 3B (070120) 1/4	MS33656-2
M81940/4-2	1/4 NPTF PER FED-STD-H28	MS33656-2
M81940/4-3	1/4 NPT PER FED-STD-H28	MS33656-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:27Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 4810-N093)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:27Z
Check the source to verify that this is the current version before use.