
MILITARY SPECIFICATION SHEET

PROTECTORS, ELECTRICAL COMMUNICATION CIRCUITS

ARRESTER ASSEMBLY, CARBON DISC, FAIL-SAFE (FS), TYPE A2

The complete requirements for procuring the arrester described herein shall consist of this document and the latest issue of Specification MIL-P-55624.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

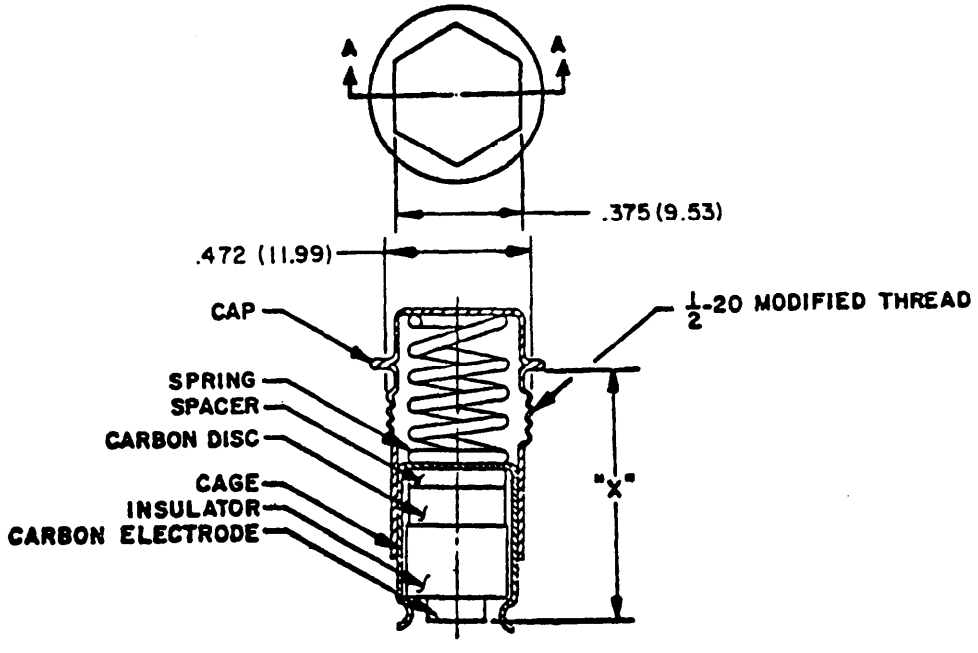

SECTION A-A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. When the spring is compressed so that distance "X" is .620(15.75 mm) inch, the force exerted shall not exceed 9 pounds; when "X" is .683(17.35 mm) in the force shall be a minimum of 1 pound.
5. Unless otherwise specified, tolerance shall be ±.010(.25 mm).

FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T23:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure. The requirements herein are not intended to limit internal construction of the assembly.

Materials:

Cap: Brass or copper.

Spring: Steel.

Spacer: Fusible component formulated to melt at sustained currents of 30 amperes or more.

Disc: Carbon.

Cage: Brass or copper.

Insulator: Ceramic or steatite.

Electrode: Carbon.

Finish: The cap, spring, and cage shall be plated with zinc, tin, cadmium, or nickel.

Cap: Shall be at ground potential at all times.

Air gap: The air gap formed between the carbon disc and the carbon electrode shall be as specified in table I.

Voltage breakdown: See table.

Ability to resist permanent grounding: Average number of discharges shall be 10 or more.

Color code: The insulator shall be color coded with a dot not less than 1/16-inch in diameter as specified in table I. This dot identifies the voltage breakdown (arc-over), dc.

Use with: MIL-P-55624/3, style P3 or MIL-P-55624/4, style P4 protector assembly.

Part number: M55624/6-(dash number from table I).

TABLE I

Dash no.	Arrester type	Air gap approx.	Breakdown voltage dc	Color code
001	A2	.004	450 ±100	White
002	A2	.006	700 ±100	Blue
003	A2	.010	1200 ±100	Yellow

Custodians:
Army - EL
Navy - YD
Air Force - 80

Review activities:
Army - MU, MI, SL, EL
Navy - EC
Air Force - 80, 11
DSA - ES

User activities:
Army - AT, WC, ME
Navy - MC, SH
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5920-0291-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R2

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in t use of the specification in procurement of products for ultimate use by the Department of Defense. This sh is provided for obtaining information on the use of this specification which will insure that suitable produc can be procured with a minimum amount of delay and at the least cost. Comments and the return of this fo will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comme and suggestions submitted on this form do not constitute or imply authorization to waive any portion of th referenced document(s) or serve to amend contractual requirements.

SPECIFICATION: JTL-P-55624/6 PROTECTORS, ELECTRICAL COMMUNICATION CIRCUITS ARRESTER ASSEMBLY, CARBON DISC, FAIL-SAFE)FS), TYPE A2

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUR MENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional pa attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:42Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- PP-SD
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T23:42Z
Check the source to verify that this is the currentversion before use.