MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

CAPACITORS, FIXED

TO ALL HOLDERS OF DOD-STD-35-4C(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-4C(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
1	25 August 1978	(Reprinted without change)	
2	14 January 1983	2	25 August 1978
3	25 August 1978	(Reprinted without change)	
4	14 January 1983	4	25 August 1978
5	14 January 1983	5	25 August 1978
6	25 August 1978	(Reprinted without change)	
15	25 August 1978	(Reprinted without change)	
16	14 January 1983	16	25 August 1978
21	25 August 1978	(Reprinted without change)	
22	14 January 1983	22	25 August 1978
23	14 January 1983	23	25 August 1978
24	14 January 1983	24	25 August 1978
25	14 January 1983	25	25 August 1978
26	14 January 1983	26	25 August 1978
27	14 January 1983	27	25 August 1978
28	25 August 1978	(Reprinted without change)	
29	25 August 1978	(Reprinted without change)	
30	14 January 1983	30	25 August 1978
31	14 January 1983	31	25 August 1978
32	25 August 1978	(Reprinted without change)	
59	25 August 1978	(Reprinted without change)	
60	14 January 1983	60	25 August 1978
61	14 January 1983	61	25 August 1978
62	14 January 1983	62	25 August 1978
63	14 January 1983	63	25 August 1978
64	25 August 1978	(Reprinted without change)	
187	14 January 1983	187	25 August 1978
188	14 January 1983	188	25 August 1978
189	14 January 1983	189	25 August 1978
190	14 January 1983	190	25 August 1978
209	14 January 1983	209	25 August 1978
210	14 January 1983	210	25 August 1978
213	25 August 1978	(Reprinted without change)	
214	14 January 1978	214	25 August 1978

AREA EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
231	25 August 1978	(Reprinted without change)	
232	14 January 1983	232	25 August 1978
235	14 January 1983	235	25 August 1978
236	25 August 1978	(Reprinted without change)	
241	25 August 1978	(Reprinted without change)	
242	25 August 1978	(Reprinted without change)	
243	25 August 1978	(Reprinted without change)	
244	25 August 1978	(Reprinted without change)	
259	14 January 1983	259	25 August 1978
260	14 January 1983	260	25 August 1978
261	14 January 1983	261	25 August 1978
262	14 January 1983	262	25 August 1978
263	14 January 1983	263	25 August 1978
264	14 January 1983	264	25 August 1978
265	14 January 1983	265	25 August 1978
266	14 January 1983	266	25 August 1978
267	14 January 1983	267	25 August 1978
268	14 January 1983	268	25 August 1978
269	14 January 1983	269	25 August 1978
270	14 January 1983	270	25 August 1978
271	14 January 1983	271	25 August 1978
273-274	14 January 1983	273-274	25 August 1978
275-276	14 January 1983	275-276	25 August 1978

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
22a	14 January 1983	210a	14 January 1983
22b	14 January 1983	213a	14 January 1983
24a	14 January 1983	213b	14 January 1983
24b	14 January 1983	231a	14 January 1983
63a	14 January 1983	231b	14 January 1983
63b	14 January 1983	241a	14 January 1983
196a	14 January 1983	241b	14 January 1983
196b	14 January 1983	243a	14 January 7983
196c	14 January 1983	243b	14 January 1983
196d	14 January 1983	256a	14 January 1983
202a	14 January 1983	256b	14 January 1983
209a	14 January 1983	256c	14 January 1983
209b	14 January 1983	256d	14 January 1983

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

3. RETAIN THIS NOTICE PAGE AND INSERT BEFORE TABLE OF CONTENTS.

4. Holders of DOD-STD-35-4C(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the military standard is completely revised or canceled.

Custodians:
Army-MI

User activity:
Army-AR

Review activities:
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-SG
Army-CR

Preparing activity:
Army-MI

(Project EDS-A320)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for fixed capacitors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles 'listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is Intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLEI. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED CERAMIC DIELECTRIC	003068	MIL-C-55681	ESTABLISHED RELIABILITY
CAPACITOR, FIXED, CERAMIC DIELECTRIC	003001	MIL-C-39014 MIL-C-11015	ER NON ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, CHIP	003071	MIL-C-55681	ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, FEEDTHROUGH	003007	MIL-C-20 MIL-C-11015 MIL-C-39014 MIL-C-83439	NON ER NON ER ER NON ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, HIGH VOLTAGE	003072	MIL-C-20 MIL-C-11015 MIL-C-39014	NON ER NON ER ER
CAPACITOR? FIXED, CERAMIC DIELECTRIC, STANDOFF	003008	MIL-C-11015 MIL-C-39014	NON ER ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, TEMPERATURE COMPENSATING (INSULATED)	003006	MIL-C-20	ER AND NON ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, TEMPERATURE COMPENSATING (UNINSULATED)	003005	MIL-C-2O	ER AND NON ER
CAPACITOR, FIXED, ELECTROLYTIC, ALUMINUM OXIDE, NONPOLARIZED	003010	MIL-C-39018	ER AND NON ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX, (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, ELECTRO-LYTIC, ALUMINUM OXIDE, POLARIZED	003009	MIL-C-39018	ER AND NON ER
CAPACITOR, FIXED, ELECTRO-LYTIC, DC, ALUMINUM DRY ELECTROLYTE, POLARIZED	003011	MIL-C-62	NON ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE TANTALUM	003025	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE TANTALUM CATHODE	003081	MIL-C-83500	NONHERMETICALLY SEALED IN METAL CASE
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, NONPOLAR-IZED, ETCHED FOIL	003017	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, NONPOLAR-IZED, PLAIN FOIL	003015	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, POLARIZED ETCHED FOIL	003016	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, POLARIZED, PLAIN FOIL	003014	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC NONSOLID ELECTRO-LYTE TANTALUM, POLARIZED, SINTERED SLUG	003013	MIL-C-39006	ER

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, ELECTROLYTIC, TANTALUM	003031	MIL-C-55365	ER, SOLID ELECTROLYTE
		MIL-C-39006	ER, NONSOLID ELECTROLYTE,
		MIL-C-49337	NONHERMETIC SEAL
CAPACITOR, FIXED, ELECTROLYTIC, TANTALUM, SOLID ELECTROLYTE	003024	MIL-C-55365	ER
		MIL-C-49137	NONHERMETIC SEAL
CAPACITOR, FIXED, ELECTROLYTIC, TANTALUM, SOLID ELECTROLYTE, CHIP	003073	MIL-C-55365	ER
CAPACITOR, FIXED, FEED-THROUGH, METALLIZED PLASTIC (HERMETICALLY SEALED IN METAL CASE)	003079	MIL-C-83439	NON ER
CAPACITOR, FIXED, FEED-THROUGH, TANTALUM, SOLID ELECTROLYTE	003078	MIL-C-83439	NON ER
CAPACITOR, FIXED, GLASS DIELECTRIC	003027	MIL-C-2269	ER
CAPACITOR, FIXED, METALLIZED	003074	MIL-C-39022	ER, HERMETIC SEAL
		MIL-C-55514	ER, NONMETALLIC CASE
		MIL-C-83421	ER, HERMETIC SEAL
CAPACITOR, FIXED, METALLIZED PAPER, DC (HERMETICALLY SEALED IN METAL CASE)	003028	MIL-C-39022	ER
		MIL-C-83421	ER
CAPACITOR, FIXED, METALLIZED PAPER-PLASTIC FILM DIELECTRIC (HERMETICALLY SEALED IN METAL CASE)	003075	MIL-C-39022	ER
		MIL-C-83421	ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, METAL-LIZED PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003076	MIL-C-39022 MIL-C-83421	ER ER
CAPACITIOR, FIXED, METAL-LIZED PLASTIC DIELECTRIC, DC, NON-METAL CASE	003034	MIL-C-55514	ER
CAPACITOR, FIXED, MICA DIELECTRIC	003039	MIL-C-5 MIL-C-39001	NON ER ER
CAPACITOR FIXED, MICA DIELECTRIC, BUTTON STYLE, FEEDTHROUGH	003040	MIL-C-10950	BUTTON STYLES
CAPACITOR FIXED, MICA DIELECTRIC, BUTTON STYLE, FEEDTHROUGH, (HERMETICALLY SEALED)	003042	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MICA DIELECTRICS BUTTON STYLE, STANDOFF	003041	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MICA DIELECTRIC BUTTON STYLE, STANDOFF, (HERMETICALLY SEALED)	003043	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MULTIELEMENT	003077	MIL-C-55365 MIL-C-55681	ER ER
CAPACITOR, FIXED, PAPER DIELECTRIC, DC, (HERMETI-CALLY SEALED IN METAL CASE)	003044	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PAPER-PLASTIC DIELECTRICS (HERMETICALLY SEALED IN CERAMIC CASE)	003048	MIL-C-19978	ER AND NON ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, PAPER-PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN GLASS CASE)	003047	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PAPER-PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003049	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN CERAMIC CASE)	003056	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN GLASS CASE)	003057	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003055	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, NONMETALLIC CASE	003052	MIL-C-55514	ER
CAPACITOR, FIXED, RADIO INTERFERENCE REDUCTION, AC FEEDTHROUGH (HERMETICALLY SEALED IN METAL CASE)	003060	MIL-C-11693	ER AND NON ER
CAPACITOR, FIXED, RADIO INTERFERENCE REDUCTION, DC FEEDTHROUGH (HERMETICALLY SEALED IN METAL CASE)	003061	MIL-C-11693	ER AND NON ER
Capacitor FIXED, RADIO INTERFERENCE REDUCTION, PAPER DIELECTRIC, AC BYPASS, (HERMETICALLY SEALED IN METAL CASE)	003064	MIL-C-12889	NON ER

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3. 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for fixed capacitor characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1386	MIN INSUL RES MEGOHM	1562	CAP, MICROFARAD	1563	CAP, PICOFARAD
1564	CAP TOL, PLUS PCT	1565	CAP TOL, MINUS PCT	1582	MAX RATED VOLTAGE, VOLTS
3587	MAXIMUM DC LEAKAGE MICROAMPS	1590	MAX DISS FACTOR, PERCENT	1596	MAXIMUM PWR FACTOR
1608	MAX SURGE VOLTAGE, VOLTS	1632	TEMP COEF, PPM/DEG	1624	MAXIMUM IMPEDANCE, OHMS
1658	MINIMUM QUALITY FACTOR	3111	FREQUENCY RATING, HERTZ	3119	MAX CUR RATING, AMPERES
3127	MAXIMUM ESR, OHMS	3139	TEMP COEF TOLERANCE PPM/DEG	7021	MAXIMUM WEIGHT, GRAMS
7022	MAXIMUM WEIGHT, OUNCES	7023	MAXIMUM WEIGHT, POUNDS	2206	CAP CHANGE PLUS PCT
2207	CAP CHANGE MINUS PCT				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY* HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
STYLE (DESIGNATION)	2020
CHARACTERISTIC (DESIGNATION)	2021
TERMINAL ASSEMBLY (DESIGNATION)	2022
TERMINAL FINISH (DESIGNATION)	2023
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEL LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5073
MAXIMUM STORAGE (DEGREES CELSIUS)	7302

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2020	STYLE 2020 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2021	CHARACTERISTIC 2021 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2022	TERMINAL ASSEMBLY 2022 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2023	TERMINAL FINISH 2023 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7303
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
WATT-SECOND RATING	
(WATT-SECONDS)	1696

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS–
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
1696	WATT–SECOND RATING. THE WATT–SECOND RATING SHALL BE 1696, AS CALCULATED USING THE FOLLOWING EQUATION: WATT–SECOND(S) EQUALS ONE–HALF THE PRODUCT OF CAPACITANCE IN FARADS AND THE SQUARE OF THE IMPRESSED DC VOLTAGE IN VOLTS .

Supersedes page 23 of 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX B	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (INCHES)	7572
SI (MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX B	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE Dimensions	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED,	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLES (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE . (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION

6790 OPERATING ALTITUDE, THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.

6791 OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.

6792 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.

6793 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.

Supersedes page 25 of 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CASE	
CONNECTION (SELECT ONE)	
SECTION ELECTRICALLY CONNECTED TO CASE.	2081
SECTION ELECTRICALLY ISOLATED FROM CASE, CASE INSULATED BY SLEEVE.	2082
	2083
SEALING (SELECT ONE)	
ENCAPSULATED.	2087
UNENCAPSULATED.	2088
HERMETIC.	1820
SIZE (LETTER)	2060

Supersedes page 26 or 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CASE.
2081	THE CAPACITOR SECTION SHALL BE ELECTRICALLY CONNECTED TO THE CASE.
2082	THE CAPACITOR SECTION SHALL BE ISOLATED FROM THE CASE.
2083	THE CAPACITOR CASE SHALL BE INSULATED BY MEANS OF A SLEEVE OR EQUIVALENT INSULATION METHOD.
2087	THE DEVICE SHALL BE ENCAPSULATED.
2088	THE DEVICE SHALL BE UNENCAPSULATED.
1820	THE DEVICE SHALL BE HERMETICALLY SEALED.
2060	THE CASE SIZE LETTER SHALL BE 2060.

Supersedes page 27 of 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
COOLING MEDIA	
OIL,	2089
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS (PERCENT OF RATED VOLTAGE)	7030
DIELECTRIC VOLTAGE STRESS (SELECT ONE)	
MAXIMUM (VOLTS PER 0.001 INCH)	2078
MAXIMUM (VOLTS PER MILLIMETER)	2079
EXTENDED FOIL TECHNIQUE.	2080

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2089 COOLING MEDIA. THE INTERNAL COOLING MEDIA SHALL BE OIL.

DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:

7025 THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.

7026 THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.

7029 THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.

7030 THE DESIGN RELIABILITY SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.

2078 DIELECTRIC VOLTAGE STRESS. THE CAPACITOR SHALL BE MANUFACTURED SUCH THAT THE VOLTAGE STRESS SHALL BE NOT GREATER THAN 2078 VOLT(S) PER THOUSANDTH OF AN INCH OF DIELECTRIC THICKNESS.

2079 DIELECTRIC VOLTAGE STRESS. THE CAPACITOR SHALL BE MANUFACTURED SUCH THAT THE VOLTAGE STRESS SHALL BE NOT GREATER THAN 2079 VOLT(S) PER MILLIMETER OF DIELECTRIC THICKNESS.

2080 EXTENDED FOIL TECHNIQUE. THE CAPACITOR SECTION SHALL BE MANUFACTURED USING THE EXTENDED FOIL TECHNIQUE.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SCHEMATIC	
*ILLUSTRATION (NUMBER)	3000
*STYLE (NUMBER)	3002
NOTE: SEE APPENDIX B.	
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM NONOPERATING (DEGREES CELSIUS)	6800
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM SERVICE (DEGREES CELSIUS)	6802
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3000 3002	SCHEMATIC. THE SCHEMATIC IS SPECIFIED BY ILLUSTRATION 3000 AND STYLE 3002. ADDITIONAL SECTIONS SHOWN BY BROKEN LINES ARE NOT RESTRICTED TO THE NUMBER OF SECTIONS ILLUSTRATED BUT ARE SPECIFIED IN THE ELECTRICAL CHARACTERISTICS TABLE.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6797	MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6800	MINIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT LESS THAN 6800 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 68011 DEGREES CELSIUS.
6802	MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
NOMINAL STORAGE (DEGREES CELSIUS)	6804
NOMINAL OPERATING (DEGREES CELSIUS)	6805
VOLTAGE	
PER ELECTRICAL CHARACTERISITCS TABLE.	
NOTE: SEE APPENDIX A, TABLE III.	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI	
(GRAMS)	7021
CAPACITANCE	
REQUIREMENTS PER ELECTRICAL CHARACTERISTICS TABLE.	
NOTE: SEE APPENDIX A, TABLE III (SELECT MICROFARADS OR PICOFARADS)	

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4737 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE-

4844 BETWEEN MUTUALLY INSULATED PARTS.

3655 DISSIPATION FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1655.

1677 DISSIPATION FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

1657 DISSIPATION FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1657.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISSIPATION FACTOR (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	1678
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1592
(MEGAHERTZ)	1588
TEST TEMPERATURE (DEGREES CELSIUS)	1591
MAXIMUM TEST VOLTAGE (VOLTS, RMS)	1593
POLARIZING VOLTAGE (VOLTS, DC)	1595
MEASUREMENT ACCURACY WITHIN (PERCENT)	1594
TEST VOLTAGE (VOLTS)	2570
EQUIVALENT SERIES RESISTANCE (ESR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1755
PER ELECTRICAL CHARACTERISTICS TABLE.	1768
*NOTE: SEE APPENDIX A, TABLE III.	

Supersedes page 60 of 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1678	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED AS FOLLOWS:
1592	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1592 HERTZ.
1588	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1588 MEGAHERTZ.
1591	THE TEST TEMPERATURE SHALL BE 1591 DEGREES CELSIUS.
1593	THE TEST VOLTAGE SHALL BE NOT GREATER THAN 1593 VOLT(S) RMS.
1595	THE POLARIZING VOLTAGE SHALL BE 1595 VOLT(S) DC.
1594	THE EQUIPMENT MEASURING ACCURACY SHALL BE WITHIN 3594 PERCENT.
2570	THE TEST VOLTAGE SHALL BE 2570 VOLT(S).
1755	EQUIVALENT SERIES RESISTANCE (ESR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1755.
1768	EQUIVALENT SERIES RESISTANCE (ESR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

Supersedes page 61 of 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EQUIVALENT SERIES RESISTANCE (ESR) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1757
AS FOLLOWS:	1769
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1758
(KILOHERTZ)	1756
TEST VOLTAGE (VOLTS)	1759
POLARIZING VOLTAGE (VOLTS, DC)	1760
TEST TEMPERATURE (DEGREES CELSIUS)	1761

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1757	EQUIVALENT SERIES RESISTANCE (ESR).	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1757.
1769	EQUIVALENT SERIES RESISTANCE (ESR).	TESTING SHALL BE PERFORMED AS FOLLOWS:
1758	THE TEST SHALL BE CONDUCTED AT A FREQUENCY OF 1758 HERTZ.	
1756	THE TEST SHALL BE CONDUCTED AT A FREQUENCY OF 1756 KILOHERTZ.	
1759	THE TEST SHALL BE CONDUCTED AT A VOLTAGE OF 1759 VOLT(S).	
1760	THE TEST SHALL BE CONDUCTED AT A POLARIZING VOLTAGE OF 1760 VOLT(S) DC.	
1761	THE TEST TEMPERATURE SHALL BE 1761 DEGREES CELSIUS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLASH POINT, IMPREGNANT/FILLING COMPOUND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	2131
MINIMUM FLASH POINT (DEGREES CELSIUS)	2132
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	2136
PER ASTMD92.	2137

New page

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2131	FLASH POINT, IMPREGNANT/FILLING COMPOUND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2131.
2132	FLASH POINT, IMPREGNANT/FILLING COMPOUND. THE FLASH POINT SHALL BE NOT LESS THAN 2132 DEGREES CELSIUS.
2136	FLASH POINT, IMPREGNANT/FILLING COMPOUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2136.
2L37	FLASH POINT, IMPREGNANT/FILLING COMPOUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD92 EXCEPT THAT THE FIRE POINT AND PRECISION DO NOT APPLY. IMPREGNANT OR FILLING COMPOUND SHALL BE SUBSTITUTED FOR THE WORD OIL THROUGHOUT THE TEST METHOD,

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY, OPERATING RANGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1981
AS FOLLOWS:	1944
MAXIMUM TEMPERATURE RISE AT MINIMUM FREQUENCY (DEGREES CELSIUS)	1897
MAXIMUM TEMPERATURE RISE AT MAXIMUM FREQUENCY (DEGREES CELSIUS)	1898
MAXIMUM INSERTION LOSS AT MAXIMUM FREQUENCY (DECIBELS)	1993
MAXIMUM INSERTION LOSS AT MINIMUM FREQUENCY (DECIBELS)	1994
MAXIMUM INSERTION LOSS AT INTERMEDIATE FREQUENCIES (DECIBELS)	1995
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1893
TEST PER MIL-STD-220.	1889

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE.

ELECTRICAL CHARACTERISTICS. CAPACITOR SECTION NUMBERS IDENTIFY EACH OF ONE OR MORE CAPACITORS MOUNTED IN A COMMON ENCLOSURE. EACH CAPACITOR SECTION SHALL MEET THE RESPECTIVE REQUIREMENTS LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	1	2	3	4
CAPACITANCE, MICROFARAD	1562	3060	3061	3062
CAPACITANCE, PICOFARAD	1563	3064	3065	3066
TOLERANCE, PLUS PCT	1564	3068	3069	3070
TOLERANCE, MINUS PCT	1565	3072	3073	3074
VOLTAGE RATING, VOLT MAX	1582	2065	3077	3078
TYPE VOLTAGE FOR RATING	1583	2066	3081	3082
VOLT RATING TEMP, DEG C	1584	2067	3085	3086
SURGE VOLTAGE, VOLT MAX	1608	3088	3089	3090
DC LEAKAGE, MICROA MAX	1587	3092	3093	3094
INSUL RES, MEGOHMS MIN	3386	3096	3097	3098
DISSIPATION FAC, PCT MAX	1590	3100	3101	3102
POWER FACTOR, MAX	1596	3104	3105	3106
QUALITY FACTOR, MIN	1658	3108	3109	3110
FREQUENCY RATING, HERTZ	3111	3112	3113	3114
PULSE CURRENT, A MAX	2095	2098	3117	3118
CURRENT RATING, A MAX	3119	3120	3121	3122
VOLT AMPERE RATING, MIN	1601	3124	3125	3126
ESR, OHMS MAX	3127	3128	3129	3130
IMPEDANCE, OHMS MAX	1624	3132	3133	3134
TEMP COEF, PPM/DEG C	1632	3136	3137	3138
TEMP COEF TOL, PPM/DEG C	3139	3140	3141	3142
TEMP CHAR, PCT	3343	3144	3145	3146
TEMP CHAR TOL, PCT	3347	3148	3149	3150
POS TERM IDENTIFIER	3569	3152	3153	3154

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE. (CONT)

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	5	6	7	8
CAPACITANCE, MICROFARAD	3355	3156	3157	3158
CAPACITANCE, PICOFARAD	3159	3160	3161	3162
TOLERANCE, PLUS PCT	3163	3164	3165	3166
TOLERANCE, MINUS PCT	3167	3168	3169	3170
VOLTAGE RATING, VOLT MAX	3171	3172	3173	3174
TYPE VOLTAGE FOR RATING	3175	3176	3177	3178
VOLT RATING TEMP, DEG C	3179	3180	3181	3182
SURGE VOLTAGE, VOLT MAX	3183	3184	3185	3186
DC LEAKAGE, MICROA MAX	3187	3188	3%89	3190
INSUL RES, MEGOHMS MIN	3191	3192	3393	3194
DISSIPATION FAC, PCT MAX	3195	3196	3197	3198
POWER FACTOR, MAX	3199	3200	3201	3202
QUALITY FACTOR, MIN	3203	3204	3205	3206
FREQUENCY RATING, HERTZ	3207	3208	3209	3210
PULSE CURRENT, A MAX	3211	3212	3213	3214
CURRENT RATING, A MAX	3215	3236	3217	3218
VOLT AMPERE RATING, MIN	3219	3220	3221	3222
ESRS OHMS MAX	3223	3224	3225	3226
IMPEDANCE, OHMS MAX	3227	3228	3229	3230
TEMP COEF, PPM/DEG C	3231	3232	3233	3234
TEMP COEF TOL, PPM/DEG C	3235	3236	3237	3238
TEMP CHAR, PCT	3239	3240	3241	3242
TEMP CHAR TOL, PCT	3243	3244	3245	3246
POS TERM IDENTIFIER	3247	3248	3249	3250

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE. (CONT)

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	5	6	7	8
CAPACITANCE, MICROFARAD	32511	3252	3253	3254
CAPACITANCE, PICOFARAD	3255	3256	3257	3258
TOLERANCE, PLUS PCT	3259	3260	3261	3262
TOLERANCE, MINUS PCT	3263	3264	3265	3266
VOLTAGE RATING, VOLT MAX	3267	3268	3269	3270
TYPE VOLTAGE FOR RATING	3271	3272	3273	3274
VOLT RATING TEMP, DEG C	3275	3276	3277	3278
SURGE VOLTAGE, VOLT MAX	3279	3280	3283	3282
DC LEAKAGE, MICROA MAX	3283	3284	3285	3206
INSUL RES, MEGOHMS MIN	3287	3288	3289	3290
DISSIPATION FAC, PCT MAX	3291	3292	3293	3294
POWER FACTOR, MAX	3295	3296	3297	3298
QUALITY FACTOR, MIN	3299	3300	3301	3302
FREQUENCY RATING, HERTZ	3303	3304	3305	3306
PULSE CURRENT,A MAX	3307	3308	3309	3310
CURRENT RATING, A MAX	3311	3312	3313	3314
VOLT AMPERE RATING, MIN	3315	3316	3337	3318
ESR, OHMS MAX	3319	3320	3321	3322
IMPEDANCE, OHMS MAX	3323	3324	3325	3326
TEMP COEF, PPM/DEG C	3327	3328	3329	3330
TEMP COEF TOL, PPM/DEG C	3331	3332	3333	3334
TEMP CHAR, PCT	3335	3336	3337	3338
TEMP CHAR TOL, PCT	3339	3340	3341	3342
POS TERM IDENTIFIER	3343	3344	3345	3346

Supersedes page 189 of 25 August 1978


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE. (CONT)


ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	13	14	15	16
CAPACITANCE, MICROFARAD	3347	3348	3349	3350
CAPACITANCE, PICOFARAD	3351	3352	3353	3354
TOLERANCE, PLUS PCT	3355	3356	3357	3358
TOLERANCE, MINUS PCT	3359	3360	3361	3362
VOLTAGE RATING, VOLT MAX	3363	3364	3365	3366
TYPE VOLTAGE FOR RATING	3367	3368	3369	3370
VOLT RATING TEMP, DEG C	3371	3372	3373	3374
SURGE VOLTAGE, VOLT MAX	3375	3376	3377	3378
DC LEAKAGE, MICRO MAX	3379	3380	3381	3382
INSUL RES, MEGOHMS MIN	3383	3384	3385	3386
DISSIPATION FAC, PCT MAX	3387	3388	3389	3390
POWER FACTOR, MAX	3393	3392	3393	3394
QUALITY FACTOR, MIN	3395	3396	3397	3398
FREQUENCY RATING, HERTZ	3399	3400	3401	3402
PULSE CURRENT, A MAX	3403	3404	3405	3406
CURRENT RATING, A MAX	3407	3408	3409	3430
VOLT AMPERE RATING, MIN	3411	3412	3413	3434
ESR, OHMS MAX	3415	3416	3417	3418
IMPEDANCE, OHMS MAX	3419	3420	34211	3422
TEMP COEF, PPM/DEG C	3423	3424	3425	3426
TEMP COEF TOL, PPM/DEG C	3427	3428	3429	3430
TEMP CHAR, PCT	3431	3432	3433	3434
TEMP CHAR TOL, PCT	3435	3436	3437	3438
POS TERM IDENTIFIER	3439	3440	3441	3442

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

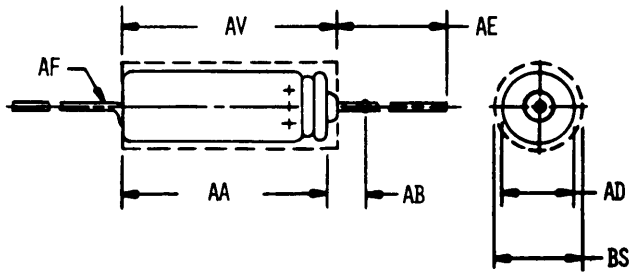


003-01-13

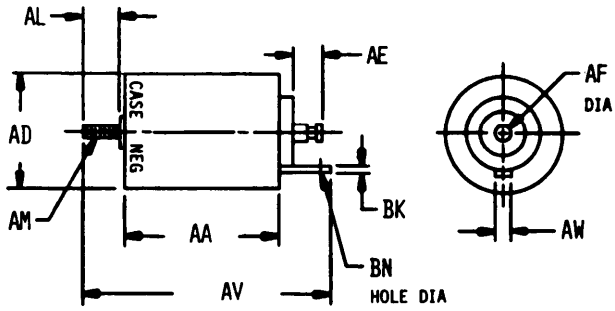


003-01-14


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

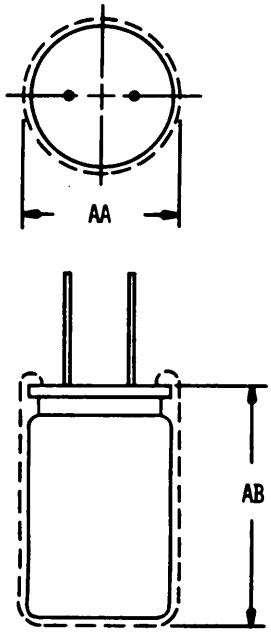

003-01-15

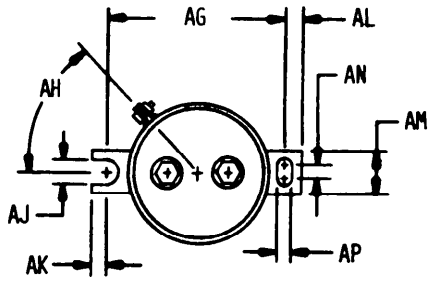


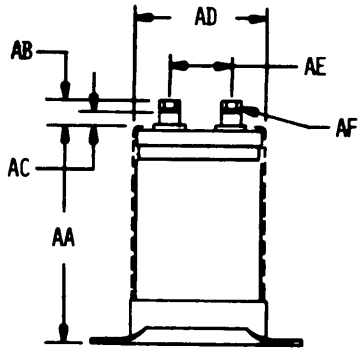


003-01-16

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

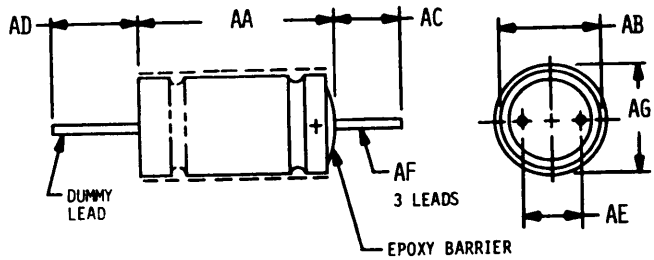


003-01-17

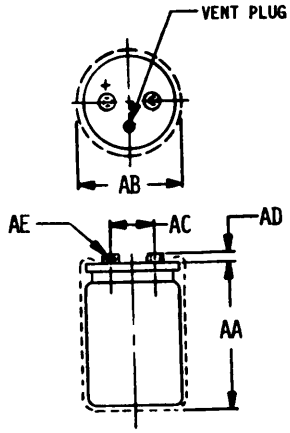

003-01-18

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

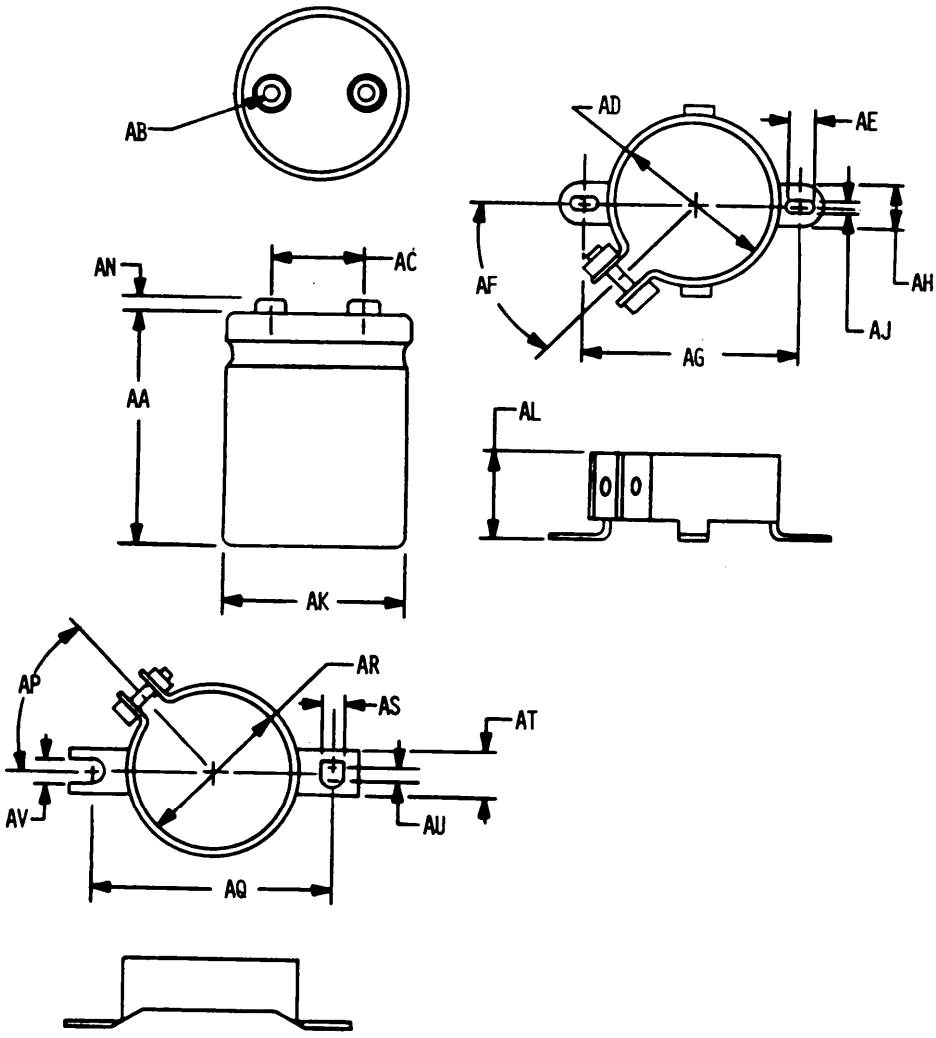


003-01-19

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

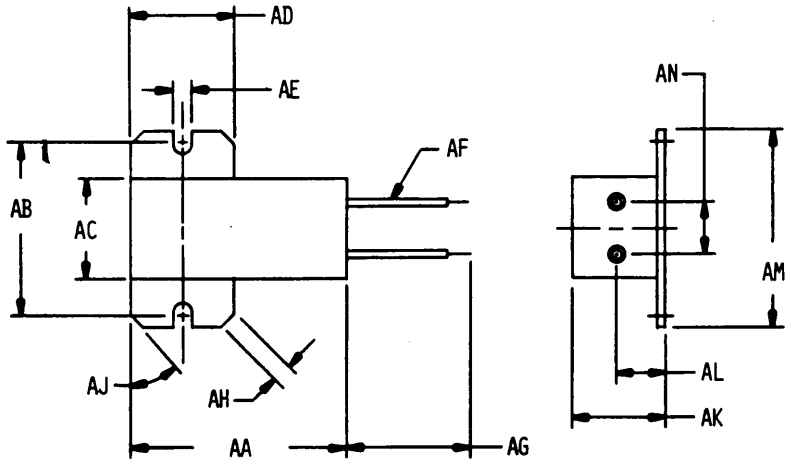

003-02-19

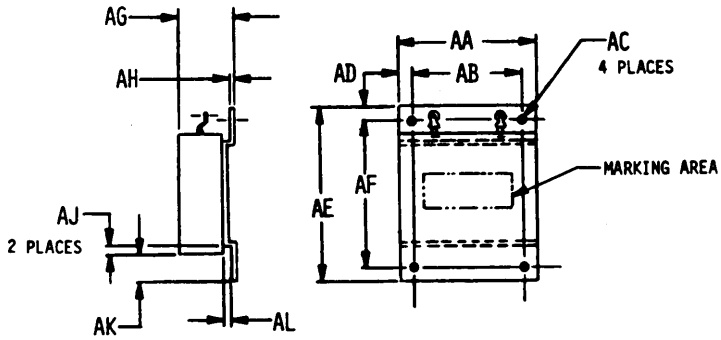


003-02-20

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

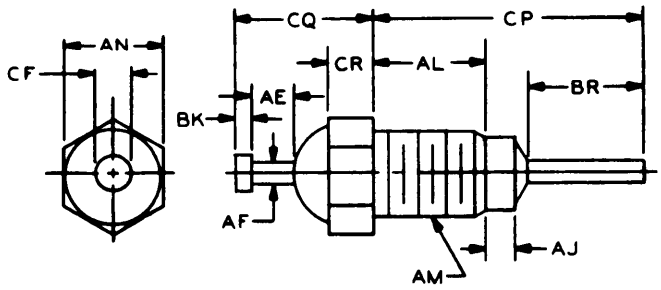

003-06-15


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

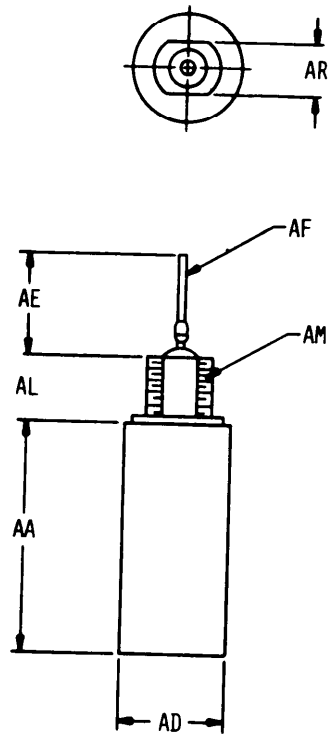

003-06-16

New page ,


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

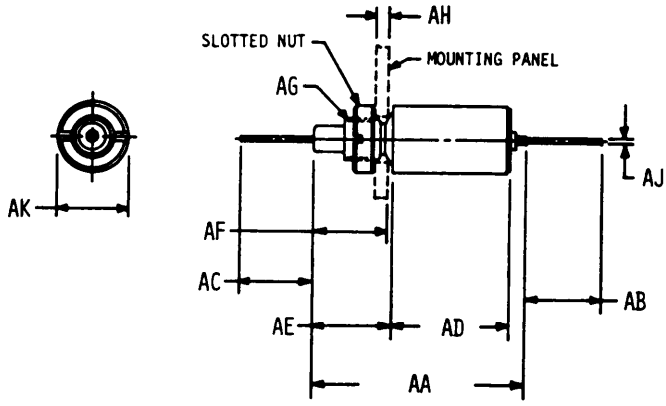


003-06-17

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

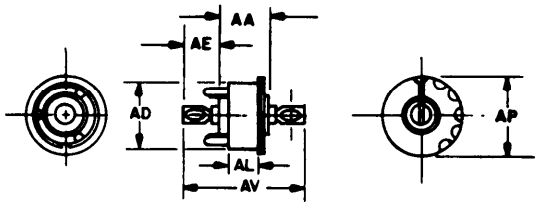


003-07-1




003-07-2



003-07-3




003-07-4

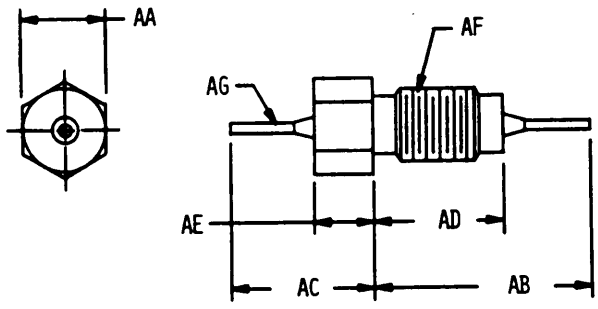

003-07-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

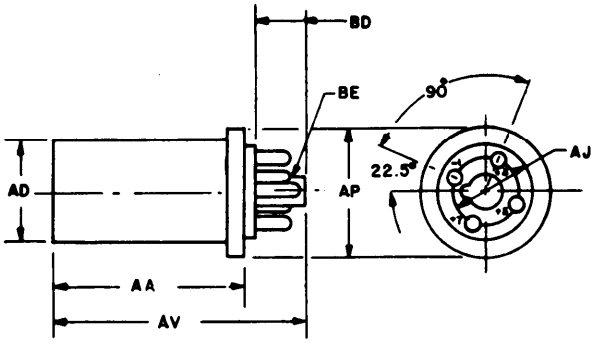


003-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

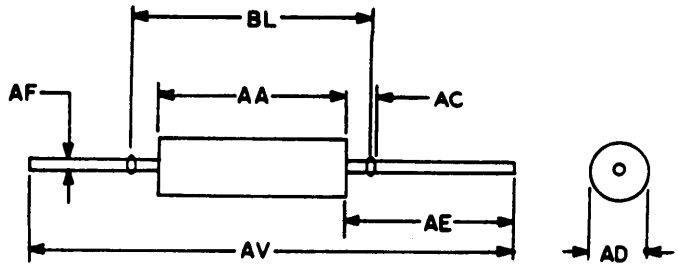


003-09-7

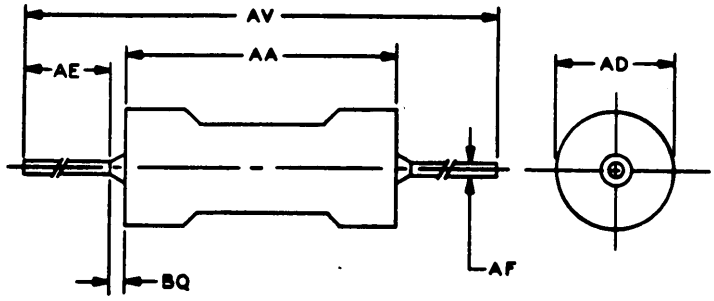

003-09-8

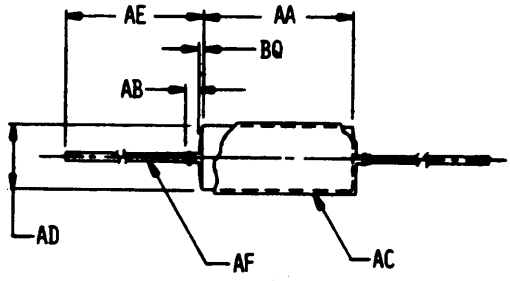


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

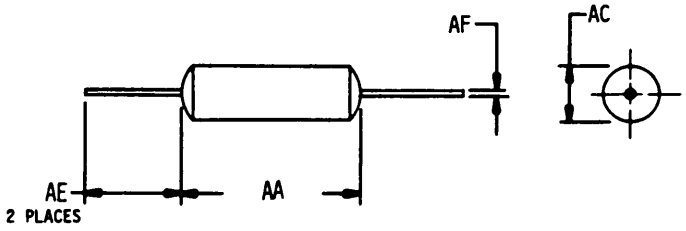

003-09-10

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.




003-10-1

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

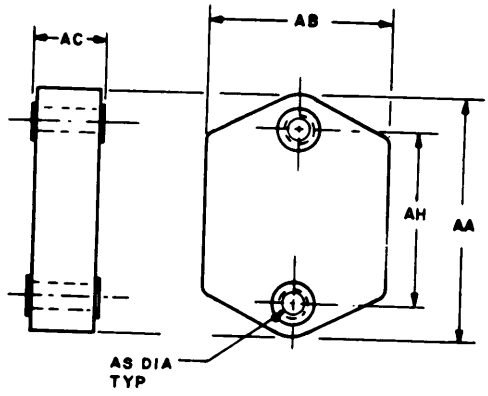

003-11-1

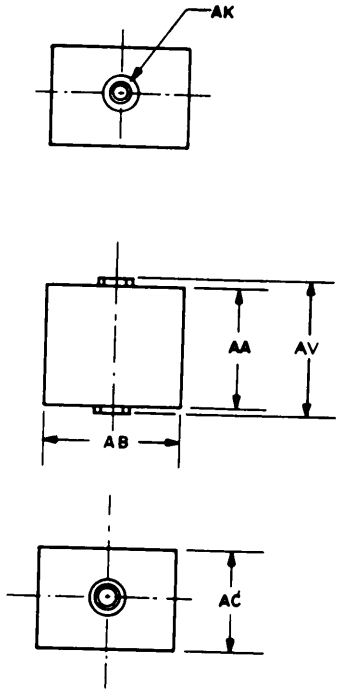


003-11-2

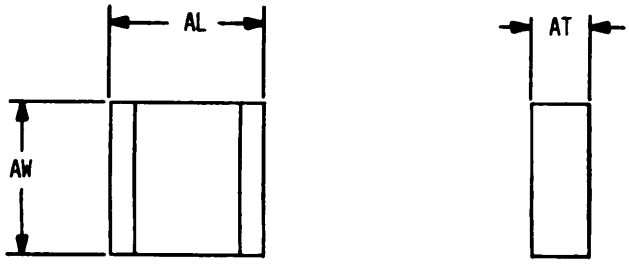

003-11-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

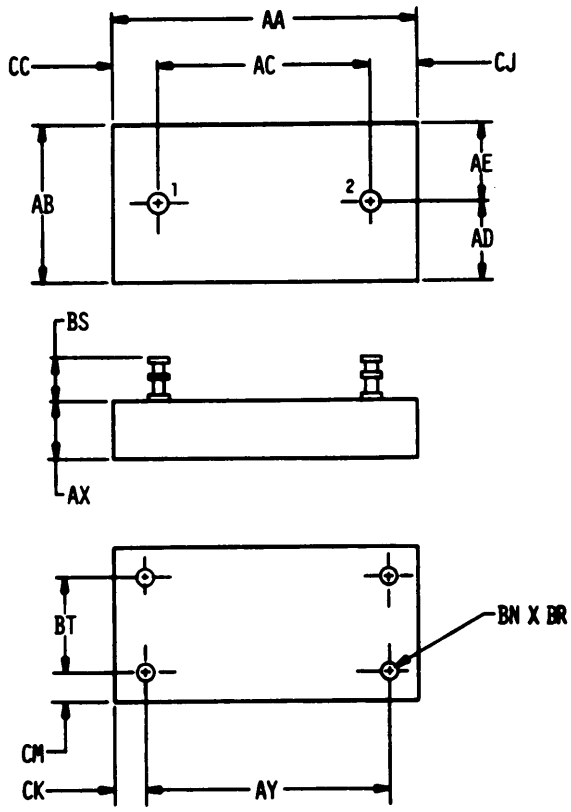


803-14-15

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

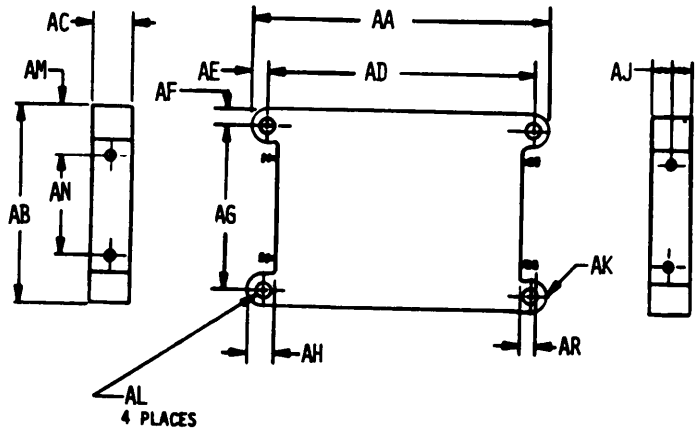


003-14-16

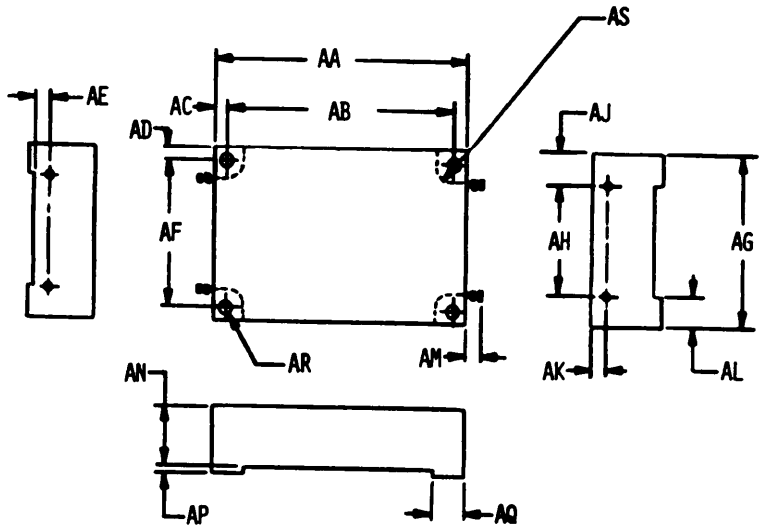


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

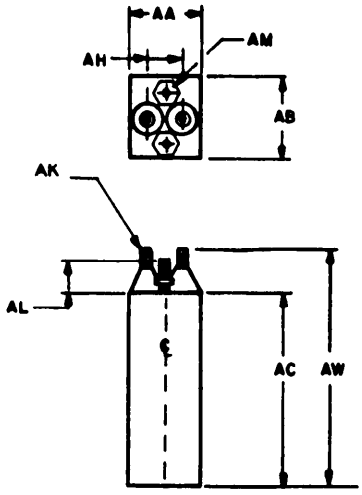


883-15-1

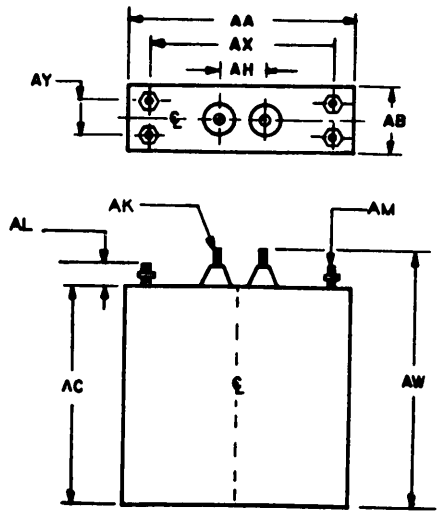


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

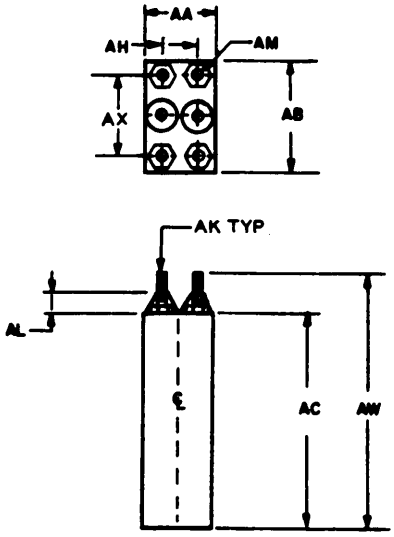


003-15-3

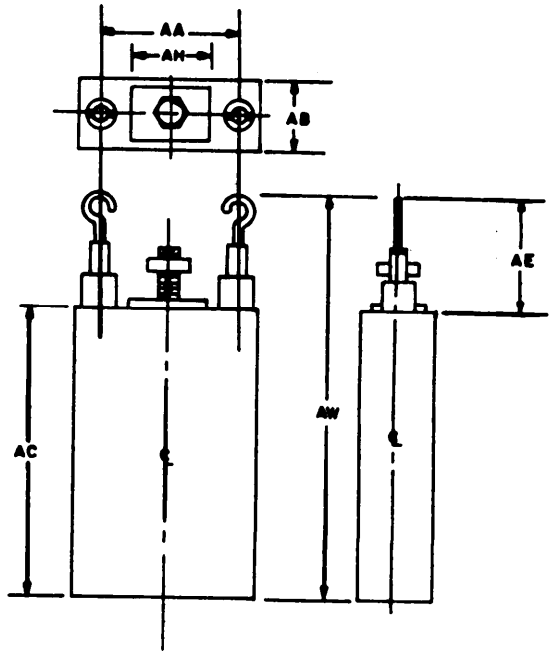


003-15-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

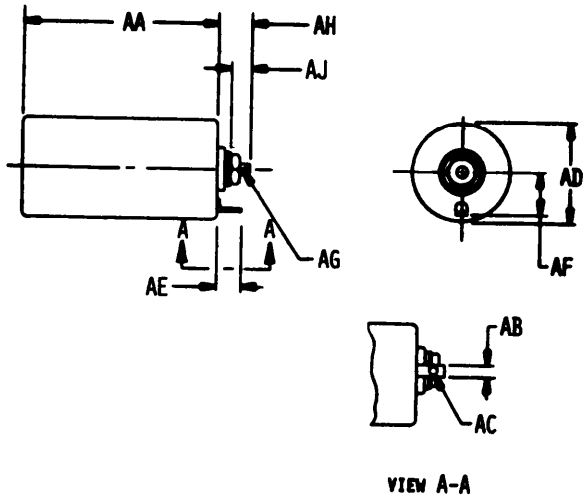


003-15-8

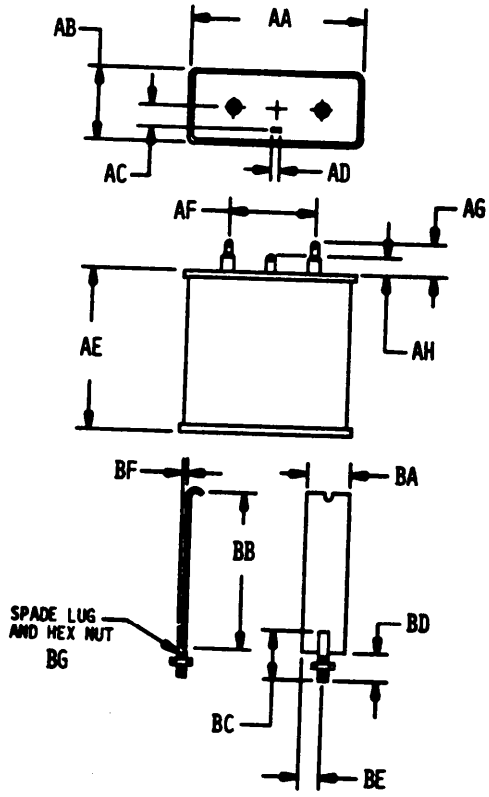


003-15-9


Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the currenversion before use.

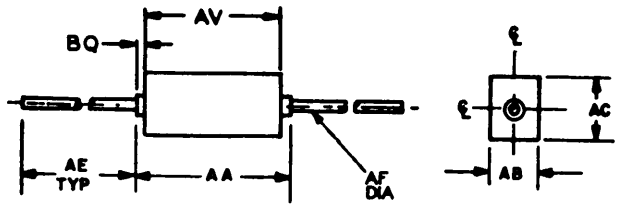

003-16-1

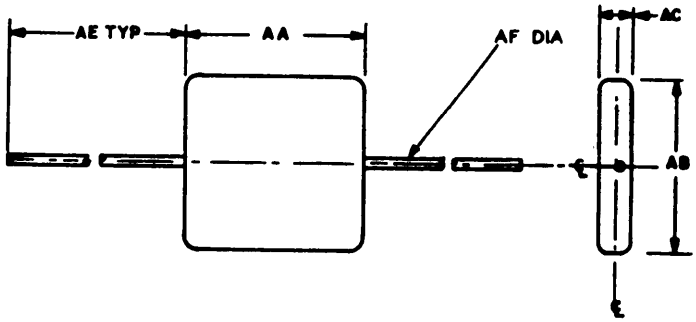


003-16-2

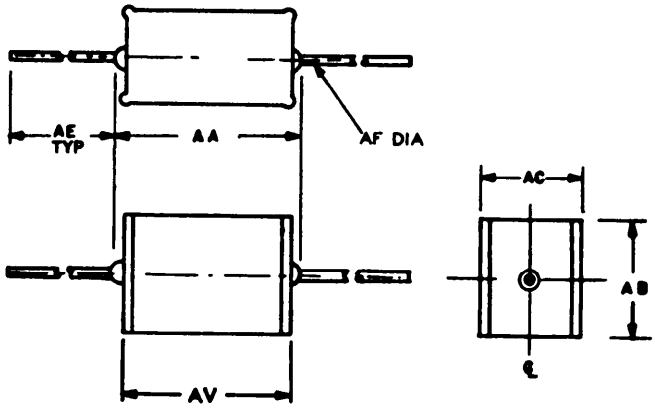


003-16-3

Reprinted without change


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

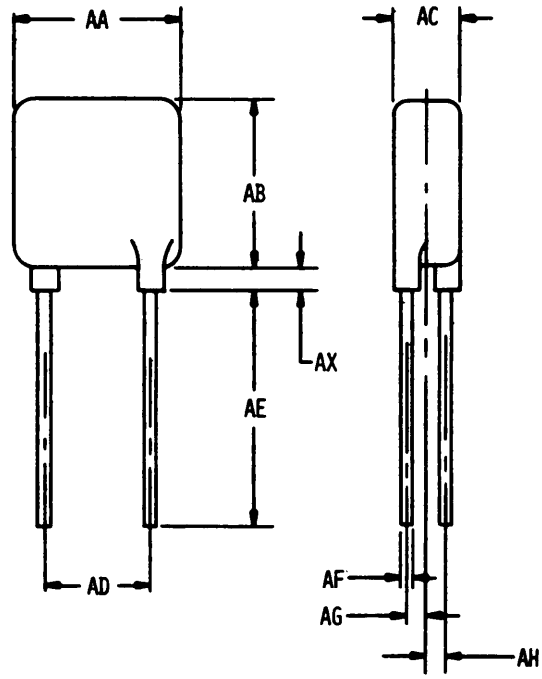

003-16-16

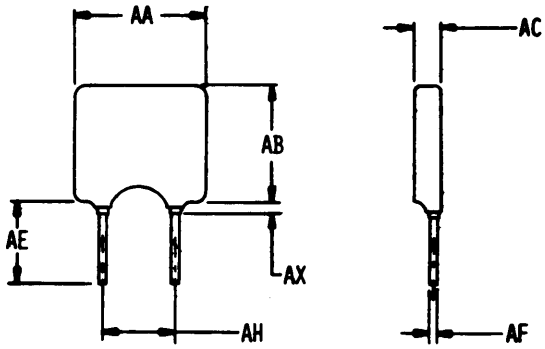


003-16-17

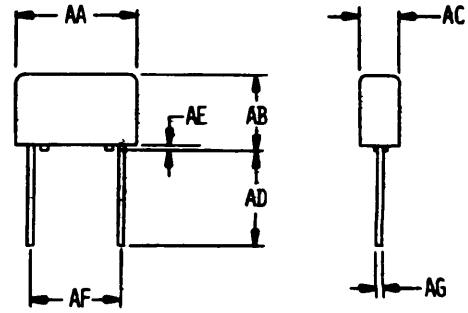


003-16-18

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

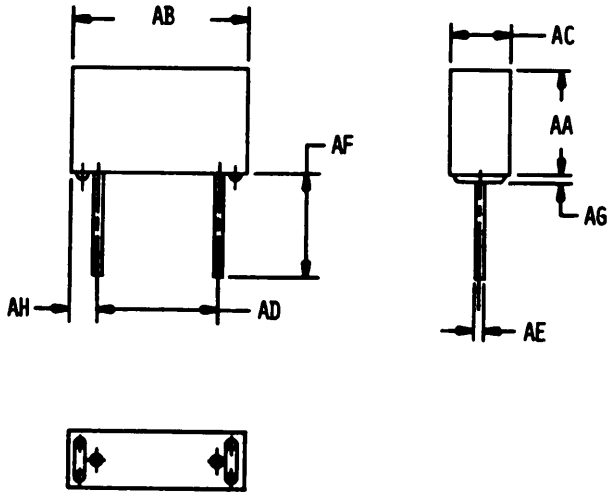


003-16-19

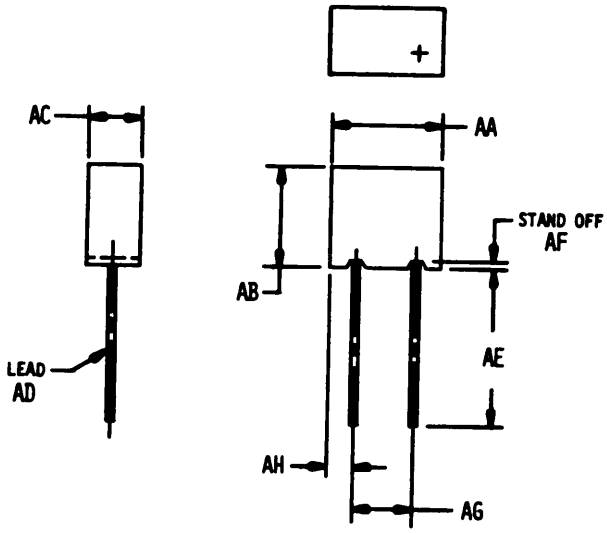


003-16-20

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

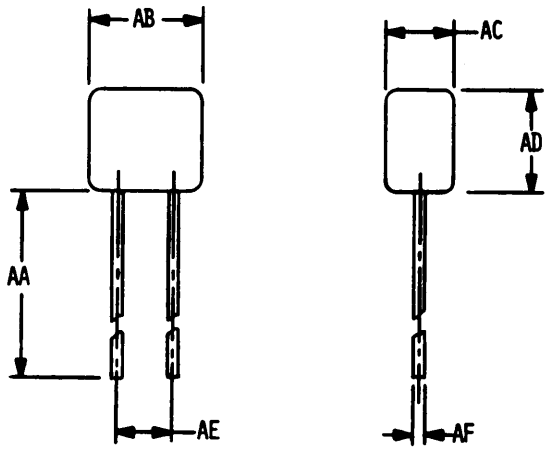


083-16-21

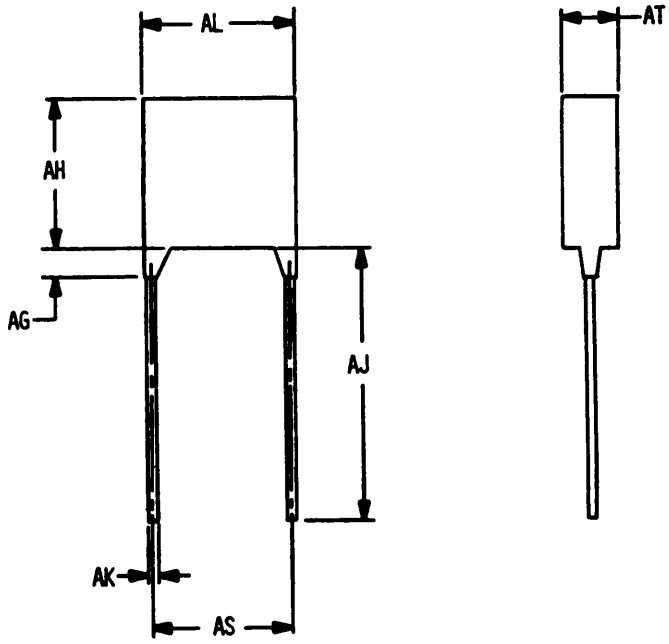


083-16-22


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

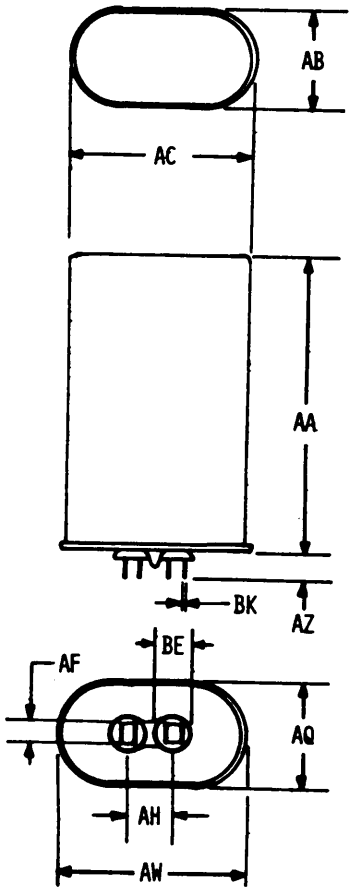

003-17-1

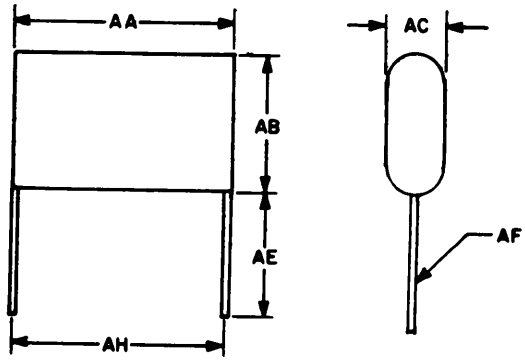


003-17-2

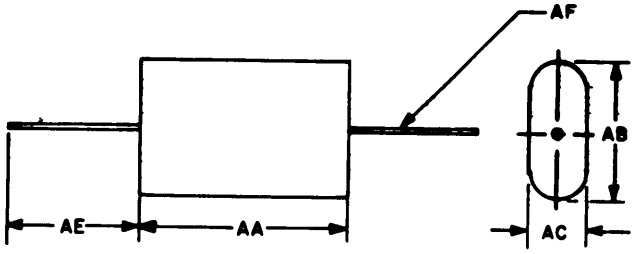


003-17-3

Reprtnted without change


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

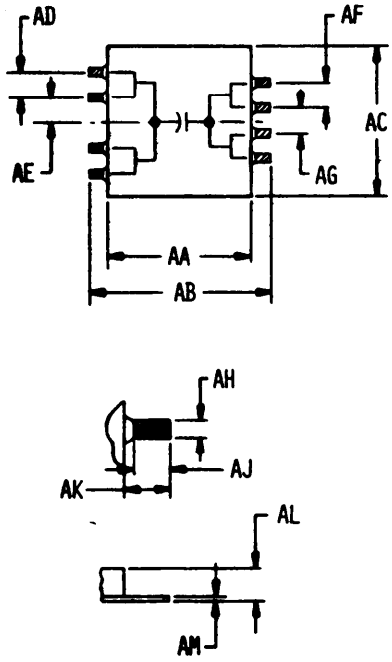


003-17-4

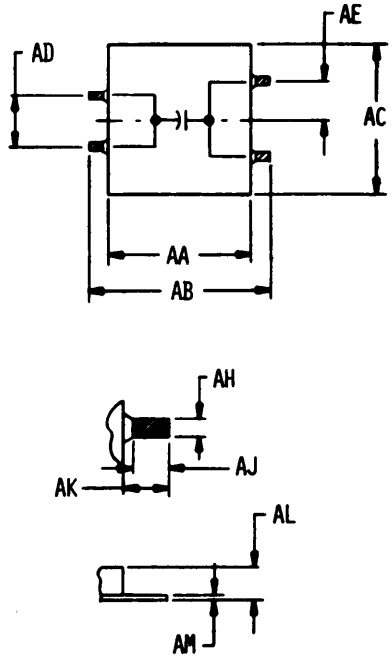

003-17-5

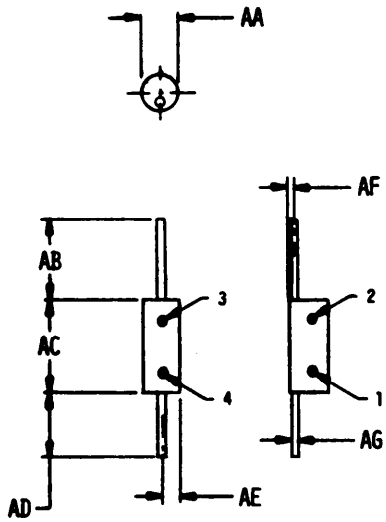


003-17-6

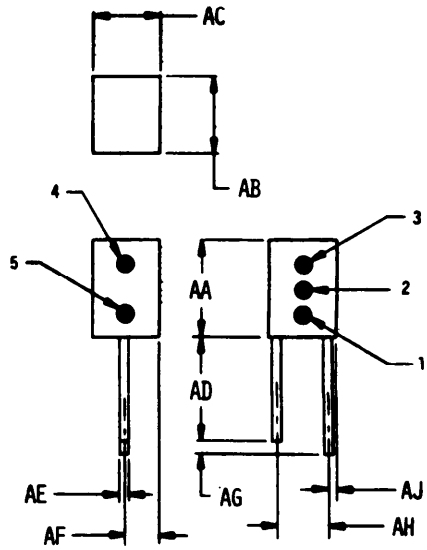


003-17-7

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

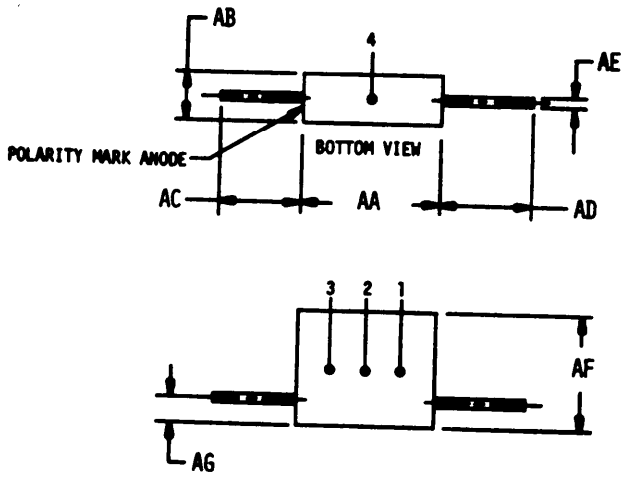


803-17-8

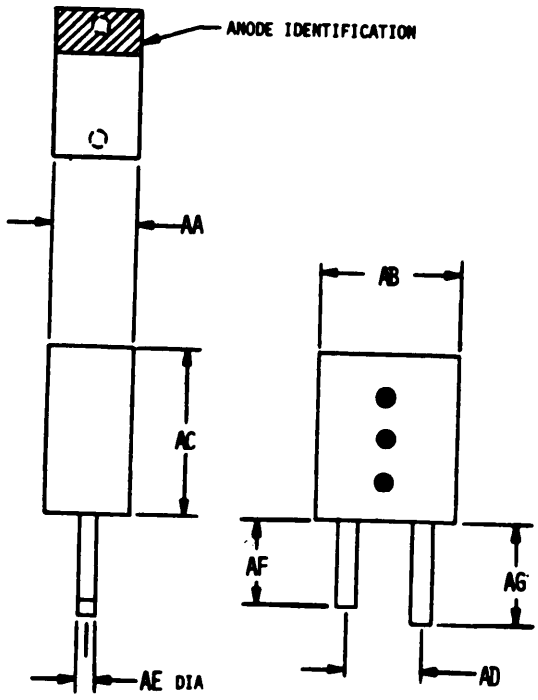

803-17-9

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

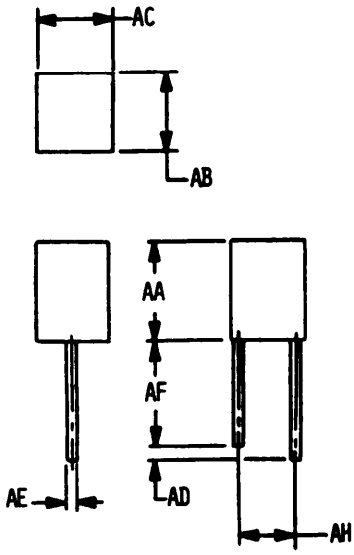


003-17-10

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

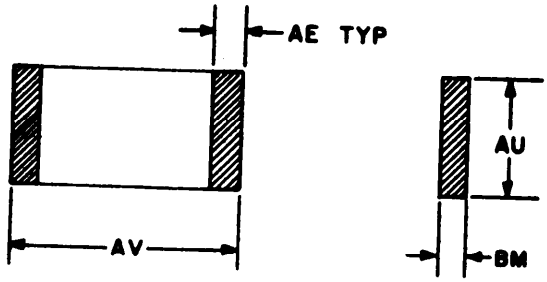


883-18-1

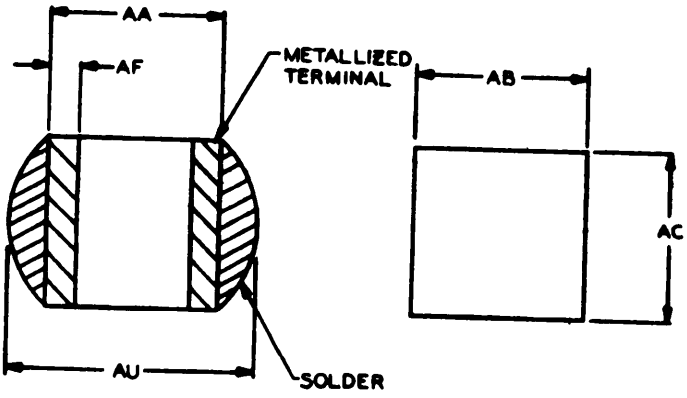


883-18-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.



003-21-7




003-21-8



003-21-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

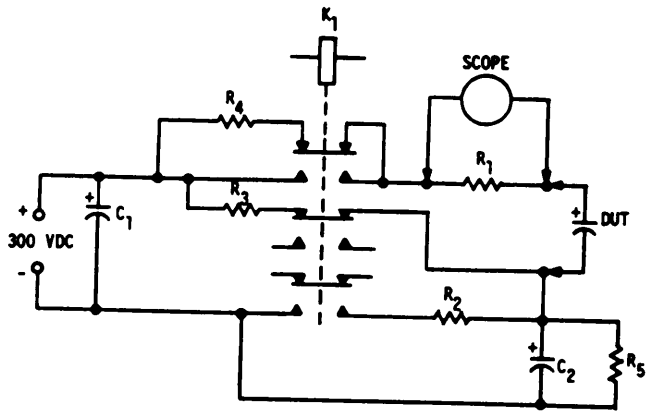

003-22-1


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.




003-23-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

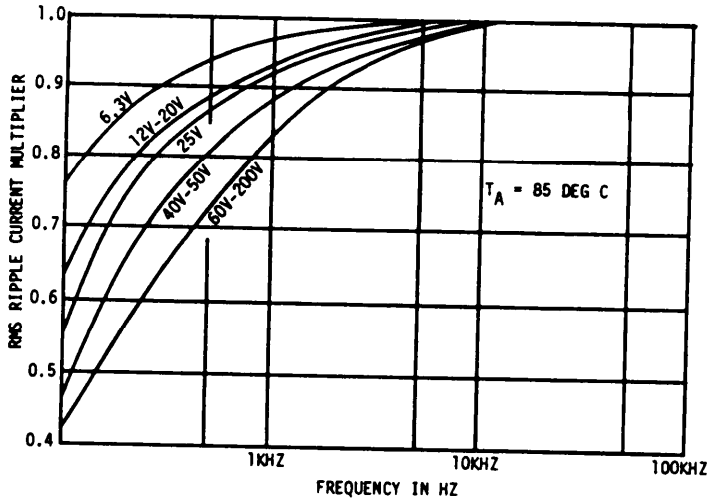

003-24-1

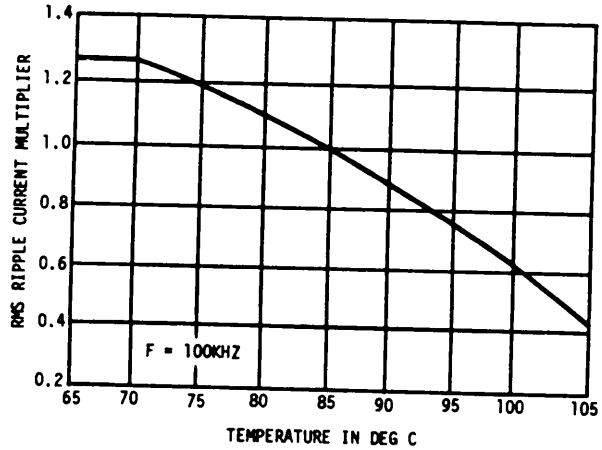

003-24-2

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	18	1414	154	1500	130	1595	60
0102	18	1416	154	1502	130	1596	187
0103	18	1418	152	1504	130	1597	100
0104	18	1419	154	1508	130	1598	100
O105	16	1420	154	1509	130	1599	100
0107	20	1421	154	1511	84	1600	100
0108	20	1426	164	1520	86	1601	187
0700	18	1627	164	1522	86	1602	100
0800	18	lb28	166	1533	160	1608	187
1003	18	1430	166	1534	160	1609	176
1004	18	1431	166	1535	162	1611	176
1005	18	1432	88	1536	162	1612	187
1006	18	1433	152	1537	162	1613	36
1008	18	1435	164	1562	187	1614	170
1009	26	1436	164	1563	187	1615	170
1371	84	1438	166	1564	187	1616	172
1372	86	1439	166	1565	187	1617	172
1373	86	1446	158	1566	34	1616	172
1375	152	1447	158	1564	34	1619	170
1376	86	1448	158	1569	187	1620	170
1377	86	1452	166	1570	34	1621	170
1378	86	1453	166	1571	34	1623	78
1380	64	1455	158	1572	34	1624	167
1381	86	1456	158	1573	34	1625	78
1383	86	1459	166	1574	34	1626	78
1384	84	1462	166	1576	176	1627	78
1386	187	1466	162	1580	176	1632	178
1387	84	1467	162	1582	187	1633	178
1388	84	1468	128	1583	187	1634	176
1391	90	1470	162	1584	187	1640	176
1394	88	1475	160	1585	46	1641	176
1395	90	1476	160	1586	46	1642	176
1396	88	1477	72	1587	187	1643	102
1397	90	1478	128	1588	60	1644	102
1400	88	1482	128	1589	178	1645	178
1406	80	1486	128	1590	187	1647	66
1410	152	1488	128	1591	69	1648	44
1411	154	1494	126	1592	60	1649	46
1412	154	1495	126	1593	68	1650	50
1413	154	1498	86	1594	60	1652	44

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1653	46	1712	142	1764	180	1817	152
1655	58	1714	98	1765	180	1819	120
1657	50	1716	98	1766	178	1620	26
1658	187	1717	98	1768	68	1821	152
1669	192	1718	98	1769	62	1822	152
1662	102	1720	178	1770	72	1823	130
1663	102	1721	170	1771	66	1824	84
1665	102	1723	170	1772	66	1825	86
1666	98	1?24	172	1773	76	1826	170
1667	102	1726	40	1774	44	1827	170
1668	98	1728	42	1775	44	1628	168
1672	100	1729	17O	1776	44	1829	168
1675	100	1730	42	1777	44	1830	174
1677	58	1731	42	1778	66	1833	156
1678	60	1732	42	1779	88	1837	148
1679	78	1733	42	1780	122	1838	150
1681	110	1734	40	1781	44	1839	158
1682	110	1735	40	1782	44	1840	162
1684	110	1737	40	1785	114	1842	148
1687	78	1739	46	1786	42	1843	148
1688	78	1740	42	1787	116	1844	150
1689	112	1741	49	1788	42	1845	148
1690	112	1742	40	1789	68	1846	148
1691	70	1743	46	1795	68	1847	92
1692	102	1744	40	1799	118	1846	150
1693	78	1745	42	1800	118	1849	148
1694	78B	1747	168	1801	108	1851	146
1696	22	1749	46	1802	106	1852	148
1697	40	1750	168	1803	108	1853	148
1698	100	1751	168	1804	150	1854	148
1699	108	1752	168	1807	150	1855	148
1700	108	1753	168	1808	150	1856	146
1701	102	1755	60	1809	150	1858	146
1702	102	1756	62	1810	150	1859	146
1703	138	1757	62	1811	150	1860	146
1706	168	1758	62	1812	150	1861	146
1707	108	1759	62	1813	150	1862	146
1709	108	1760	62	1814	56	1863	146
1710	140	1761	62	1815	112	1864	146
1711	42	1763	180	1816	112	1865	146

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1866	146	1930	48	1974	94	2055	176
1867	146	1932	48	1975	94	2056	176
1869	144	1933	48	1976	92	2057	176
1870	144	1934	59	1977	92	2060	26
1871	144	1935	50	1578	90	2061	174
1872	144	1936	50	1981	172	2062	174
1873	144	1937	50	1982	172	2063	174
1876	144	1938	59	1984	172	2065	187
1877	142	1939	50	1985	174	2066	187
1878	142	1941	48	1987	36	2067	187
1880	142	1942	48	1988	36	2071	88
1881	144	1943	92	1990	34	2072	88
1882	142	1944	64	1991	36	2073	76
1883	144	1945	48	1992	36	2074	76
1884	144	1946	98	1993	64	2075	76
1885	142	1947	98	1994	64	2076	112
1886	144	1948	98	1995	64	2078	28
1888	142	1949	98	1996	80	2079	28
1889	64	1950	68	1997	82	2080	26
1891	64	1951	94	1998	82	2081	26
1893	64	1952	68	1999	82	2082	26
1894	66	1953	92	2000	82	2083	26
1895	66	1955	68	2001	172	2087	26
1896	66	1956	68	2002	94	2088	26
1897	64	1957	68	2020	22	2089	28
1898	64	1958	68	2021	22	2090	172
1907	152	1959	66	2022	22	2091	174
1908	132	1960	68	2023	22	2092	182
1909	88	1961	68	2031	82	2093	172
1911	80	1962	68	2032	82	2094	172
1912	80	1963	66	2041	80	2095	187
1913	80	1965	92	2043	60	2096	42
1915	82	1966	92	2044	80	2097	42
1916	82	1967	92	2046	80	2098	187
1917	82	1968	66	2847	80	2101	36
1918	82	1969	92	2049	78	2102	36
1919	82	1970	92	2051	174	2103	36
1920	82	1971	92	2052	60	2104	38
1923	82	1972	92	2053	174	2105	36
1924	82	1973	94	2054	174	2106	36

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2167	36	2165	164	2215	141	2255	141
2111	38	2166	164	2216	141	2256	141
2112	38	2167	164	2217	141	2257	141
2113	38	2168	164	2218	141	2258	141
2114	38	2169	52	2219	141	2259	141
2115	36	2170	56	2220	141	2260	141
2116	30	2171	56	2221	141	2261	141
2117	38	2177	164	2222	141	2262	141
2118	38	2174	94	2223	141	2263	141
2119	38	2175	94	2224	141	2264	141
2120	38A	2176	94	2225	141	2265	141
2131	63A	2177	9b	2226	141	2266	141
2132	63A	2178	96	2227	141	2267	141
2136	63A	2179	96	2228	141	2268	141
2137	63	2180	96	2229	141	2269	141
2160	128	2181	96	2230	141	2270	141
2141	128	2182	96	2231	141	2271	141
2142	128	2184	96	2232	141	2272	141
2143	128	2185	94	2233	141	2293	138
2144	128	2186	96	2234	141	2294	138
2145	130	2187	96	2235	141	2295	138
2146	138	2188	96	2236	141	2296	52
2147	130	2189	96	2237	141	2299	134
2168	130	2190	96	2238	141	2301	137
2149	152	2191	96	2239	141	2302	137
2150	156	2210	149	2240	141	2303	137
2151	156	2201	141	2241	141	2304	137
2152	156	2202	141	2242	141	2305	137
2153	156	220 3	141	2243	141	2306	137
2154	158	2204	141	2244	141	2307	137
2155	158	2205	141	2245	141	2308	137
2156	158	2206	141	2246	141	2309	137
2157	158	2207	141	2247	141	2310	137
2158	158	2208	141	2248	141	2311	137
2159	160	2209	141	2249	141	2313	137
2160	160	2218	141	2248	141	2314	137
2161	160	2211	141	2251	141	2315	137
2162	162	2212	161	2252	141	2316	137
2163	162	2213	141	2253	141	2317	137
2164	164	2216	141	2254	141	2318	137

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2319	137	2363	137	2406	137	2450	137
2320	137	2364	137	2407	137	2451	137
2321	137	2365	137	2409	137	2452	137
2322	137	2366	137	2410	137	2453	137
2323	137	2367	137	2411	137	2454	137
2325	137	2368	137	2412	137	2455	137
2326	137	2369	137	2413	137	2457	137
2327	137	2370	137	2414	137	2458	137
2328	137	2371	137	2415	137	2459	137
2329	137	2373	137	2416	137	2460	137
2330	137	2374	137	2417	137	2461	137
2331	137	2375	137	2418	137	2462	137
2332	137	2376	137	2419	137	2463	137
2333	137	2377	137	2421	137	2464	137
2334	137	2378	137	2422	137	2465	137
2335	137	2379	137	2423	137	2466	137
2337	137	2380	137	2424	137	2467	137
2338	137	2381	137	2425	137	2469	137
2339	137	2382	137	2426	137	2470	137
2340	137	2383	137	2427	137	2671	137
2341	137	2385	137	2428	137	2472	137
2342	137	2386	137	2429	137	2473	137
2343	137	2387	137	2430	137	2474	137
2344	137	2388	137	2431	137	2475	137
2345	137	2389	137	2433	137	2476	137
2346	137	2390	137	2436	137	2477	137
2347	137	2391	137	2435	137	2478	137
2349	137	2392	137	2436	137	2479	137
23S0	137	2393	137	2437	137	2481	137
23S1	137	2394	137	2438	137	2482	137
2352	137	2395	137	2439	137	2483	137
2353	137	2397	137	2440	137	2484	137
2354	137	2398	137	2441	137	2485	137
2355	137	2399	137	2442	137	2486	137
2356	137	2400	137	2443	137	2487	137
2357	137	2401	137	2445	137	2488	137
2358	137	2402	137	2446	137	2489	137
2359	137	2403	137	2447	137	2490	137
2361	137	2404	137	2448	137	2491	137
2362	137	2405	137	2449	137	2493	137

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2494	137	2537	137	3093	187	3142	187
2495	137	2538	13?	3094	187	3143	187
2496	137	2539	137	3096	187	3144	187
2497	137	2559	46	3097	187	3145	187
2498	137	2560	46	3098	187	3146	187
2699	137	2562	46	3100	187	3147	187
2500	137	2563	46	3101	187	3148	187
2501	137	2564	48	3102	187	3149	187
2502	137	2565	48	3104	187	3150	187
2503	137	2566	48	3105	187	3152	187
2505	137	2567	48	3106	187	3153	187
2506	137	2566	34	3108	187	3154	187
2507	137	2569	34	3109	187	3155	148
2508	137	2570	60	3110	187	3156	188
2509	137	2571	34	3111	187	3157	188
2510	137	3000	30	3112	187	3158	188
2511	137	3001	44	3113	187	3159	188
2512	137	3002	30	3114	187	3160	188
2513	137	3060	187	3117	187	3161	188
2514	137	3061	187	3118	187	3162	188
2515	137	3062	187	3119	187	3163	188
2517	137	3064	187	3120	187	3164	188
2518	137	3065	187	3121	187	3165	188
2519	137	3066	187	3122	187	3166	188
2528	137	3068	187	3124	187	3167	188
2521	137	3069	187	3125	187	3168	188
2522	137	3070	187	3126	187	3169	188
2523	137	3072	187	3127	187	3170	188
2524	137	3073	187	3128	187	3171	188
2525	137	3074	187	3129	187	3172	188
2526	137	3077	187	3130	187	3173	188
2527	137	3078	187	3132	187	3174	186
2529	137	3081	187	3133	187	3175	188
2530	137	3082	187	3134	187	3176	188
2531	137	3085	187	3136	187	3177	188
2532	137	3086	187	3137	187	3178	188
2533	137	3088	187	3138	187	3179	188
2534	137	3089	187	3139	187	3180	188
2535	137	3090	187	3140	187	3181	188
2536	137	3092	187	3141	187	3182	188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3183	188	3223	188	3263	189	3303	189
3184	188	3224	188	3264	189	3304	189
3185	188	3225	188	3265	189	3305	189
3186	188	3226	188	3266	189	3306	189
3187	188	3227	188	3267	189	3307	189
3188	188	3228	188	3268	189	3308	189
3189	188	3229	188	3269	189	3309	189
3190	180	323Q	188	3270	189	3310	189
3191	188	3231	188	3271	189	3311	189
3192	188	3232	186	3272	189	3312	189
3193	188	3233	188	3273	189	3313	189
3194	188	3234	188	3274	189	3314	189
3195	188	3235	188	3275	189	3315	189
3196	188	3236	188	3276	189	3316	189
3197	188	3237	188	3277	189	3317	189
3198	188	3238	188	3278	189	3318	189
3199	188	3239	188	3279	189	3319	189
3200	188	3240	188	3280	189	3320	189
3201	188	3241	188	3281	189	3321	189
3202	188	3242	188	3282	189	3322	189
3203	188	3243	188	3283	189	3323	189
3204	188	3244	188	3284	189	3324	189
3205	188	3245	188	3285	189	3325	189
3206	188	3246	188	3286	189	3326	189
3207	188	3247	188	3287	189	3327	189
3208	188	3248	188	3288	189	3328	189
3209	188	3249	188	3289	189	3329	189
3210	188	3250	188	3290	189	3330	189
3211	188	3251	189	3291	189	3331	109
3212	188	3252	189	3292	189	3332	189
3213	188	3253	189	3293	189	3333	189
3214	188	3254	189	3294	189	3334	189
3215	188	3255	189	3295	189	3335	189
3216	188	3256	189	3296	189	3336	189
3217	188	3257	189	3297	189	3337	189
3218	188	3258	189	3298	189	3338	189
3219	188	3259	189	3299	189	3339	189
3220	188	3260	189	3300	189	3340	189
3221	188	3261	189	3301	189	3341	189
3222	188	3262	189	3302	189	3342	189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3343	189	3383	190	3423	190	4698	114
3344	189	3384	190	3424	190	4700	112
3345	189	3385	190	3425	190	4701	112
3346	189	3386	190	3426	190	4706	112
3347	190	3367	190	3427	190	4707	160
3348	190	3388	190	3428	190	4708	160
3349	190	3389	190	3429	190	4709	160
3350	190	3390	190	3430	190	4713	156
3351	190	3391	190	3431	190	4714	156
3352	190	3392	190	3432	190	4715	156
3353	190	3393	190	3433	190	4717	58
3354	190	3394	190	3434	190	4719	156
3355	190	3395	190	3435	190	4722	156
3356	190	3396	190	3436	190	4723	156
3357	190	3397	190	3437	190	4729	162
3358	190	3398	190	3436	190	4730	162
3359	190	3399	190	3439	190	4731	162
3360	190	3400	190	3440	190	4732	122
3361	190	3401	190	3441	190	4734	122
3362	190	3402	190	3442	190	4735	126
3363	190	3403	190	4662	132	4736	124
3364	190	3404	190	4663	134	4737	122
3365	190	3405	190	4664	136	4738	122
3366	190	3406	190	4665	134	4739	122
3367	190	3407	190	4666	134	4740	124
3368	190	3408	190	6667	134	4741	124
3369	190	3409	190	4669	134	4742	124
3370	190	341O	190	4671	114	4743	126
3371	190	3411	190	4672	132	4745	122
3372	190	3412	190	4674	132	4746	122
3373	190	3413	190	4675	132	4748	122
3374	190	3414	190	4683	132	4749	124
3375	190	3415	190	4684	132	4750	126
3376	190	3416	190	4685	132	475 1	126
3377	190	3417	190	4686	132	4752	126
3378	190	3418	190	4689	112	4754	76
3379	190	3419	190	4691	114	4755	79
338O	190	3420	190	4692	114	4756	70
3381	190	3421	190	4694	114	4760	70
3382	190	3422	190	4695	114	4761	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4762	70	4852	56	4985	90	6322	124
4765	118	4853	74	4986	90	6323	124
4766	118	4854	56	4989	114	6324	124
4770	118	4855	56	4991	90B	6325	124
6771	118	4856	56	5046	22B	6326	124
4772	118	4857	104	5048	22B	6328	126
4773	118	4858	104	5052	22B	6329	126
4782	116	4861	56	5054	22	6338	126
4783	118	4862	56	5060	22	6331	126
4788	74	4867	58	5061	22	6332	126
4790	74	4872	120	5062	22	6333	126
4791	72	4874	54	5063	22B	6359	84
4793	74	4878	116	5068	22	6369	18
4798	70	4884	52	5869	22B	6370	122
4799	72	4885	54	5070	22	6371	104
4802	?2	4886	52	5071	22	6372	189
4803	72	4890	74	5297	106	6696	110
4805	72	4891	54	6206	74	6697	110
4806	72	4897	58	6208	74	6698	110
4809	76	4902	54B	6279	116	6699	110
4810	76	4904	22B	6282	184	6700	110
4811	76	4905	22	6283	106	6706	110
4812	76	4906	50	6284	106	6707	110B
4814	76	4908	50	6285	106	6790	24B
4815	72	495Q	24	6286	106	6791	248
4819	76	4952	120	6287	106	6792	24B
4820	76	4956	120	6288	106	6793	24
4820	76	4958	118	6289	106	6794	30
4829	116	4959	118	6291	104	6795	30
4830	114	4960	120	6292	54	6796	30
4831	116	4969	74	6298	120	6797	30
4832	116	4970	74	6299	120	6798	30
4835	116	4971	74	6300	52	6795	30
4836	114	4975	168	6303	52	68O0	30
4838	116	4976	168	6304	52	6801	30
4839	116	4977	168	6307	54	6802	30
4843	104	4980	90	6310	54	6803	30
4844	56	4981	90	6312	56	6804	32
4848	58	4983	90	6320	122	6865	32
4849	54	4984	90	6321	124	6670	176

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6873	18						
6874	20						
6923	112						
6929	198						
6930	108						
6941	20						
6942	20						
6991	180						
6992	180						
6993	188						
6994	180						
6995	180						
7001	178						
7002	178						
7003	178						
7004	178						
7005	178						
7021	32						
7022	32						
7023	32						
7025	28						
7026	28						
7029	28						
7030	28B						
7301	22						
7302	22						
7572	24						
7577	24B						
7580	24						
7629	180						
7630	180						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

INDEX

Page

Additional Part Marking - 180
Additional Requirements - 178
Altitude- 24b
Altitude Rating - 22
Aperture Cards Required - 20
Applicable Documents- 182

Base Document - 18

Capacitance - 32
Capacitance Drift - 34
Case- 26
City, State, Zip- 18
Classification- 22
Company Name/Command- 18
Configuration - 24
Contract Number/Office Symbol - 18
Control - 18
Cooling Media - 28
Corona- 36
Current Rating- 40
Current Rating, Pulse - 40

Date- 18
DC Leakage- 44
DC Resistance - 46
Definition of Hermetic Sealing- 182
Design and Construction - 24b
Design Reliability- 28
Dielectric Absorption - 48
Dielectric Voltage Stress - 28
Dielectric Withstanding Voltage at Reduced Barometric Pressure- - - - 50
Dielectric Withstanding Voltage at Sea Level- - - - - - - - - - - - - - 54
Dissipation Factor- 58

Equivalent Series Resistance (ESR)- 60
Extended Foil Technique - 28

Finishes- 24
Flash Point, Impregnant/Filling Compound- - - - - - - - - - - - - - - - 63a
Format- 18
Frequency, Operating Range- 64
Frequency Rating, Continuous Current- - - - - - - - - - - - - - - - - - - 66
Fungus- 70

Supersedes page 269 of 25 August 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Government Design Activity FSCM - 18

Humidity- 70

Illustrations - 24
Immersion - 76
Impedance - 78
Inductance- 78
Insertion Loss- 80
Insulation Resistance - 84

Materials - 24
Metals- 24b
Moisture Resistance - 88
Mounting Hardware - 178

Nomenclature- 182
Notes - 182

Operation in Oil- 90
Overload/Voltage Drop - 94

Packaging - 182
Part Marking- 180
Part Number - 20
Part Number Cross-Reference - 182
Permeability, Magnetic- 98
Phone Number- 18
Power Factor- 98
Positive Terminal (Anode) Marking - 180
Preconditioning - 100

Quality Assurance Provisions- 182
Quality Factor- 102

Radiographic- 104
Rating- 22
Reliability Screening (Burn-in, Ageing, Conditioning, Stabilization,
Load Life, Overload)- 108
Requester FSCM- 18
Requester's Name- 18
Resistance to Soldering Heat- 112
Resistance to Solvents- 114
Revision of AEDPS Document (Number) - - - - - - - - - - - - - - - - - - - 20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Salt Spray - 116
Sand and Dust - 118
Schematic - 30
Scope - 20
Seal - 122
Shock, High Impact - 126
Shock, Specified Pulse - 130
Shorting Wire - 182
Solderability - 132
Source Table - 20
Stability at Low and High Temperatures - 134
Street/Building - 18
Superseded Document - 182
System Application - 18

Tabulated Characteristics - 24
Temperature - 30
Temperature Coefficient/Temperature Characteristic/Voltage
Temperature Limits - 138
Temperature, Exposure, High - 142
Temperature, Exposure, Low - 146
Temperature, Operation, Low - 148
Temperature Rating - 22
Terminal Strength - 152
Thermal Shock - 156

Units of Measure - 20

Vibration, High Frequency - 158
Vibration, Low Frequency - 160
Vibration, Random - 164
Voltage - 32
Voltage, Reverse Rating - 170
Voltage, Ripple Rating - 172
Voltage Standing Wave Ratio (VSWR) - 174
Voltage, Surge Rating - 176
Volt Ampere Rating - 168

Watt-Second Rating - 22b
Weight - 32
Workmanship - 178

Supersedes page 271 of 25 August 1978

*U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034:1865

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

SRS CONTROL NO.	
*TITLE CODE	*REQUESTER NO.
1 2 3 4 5 6	7 8 9 10 11 12

	CHAR CODE			
*REQUESTER'S NAME	Ø	1	Ø	1
*COMPANY NAME/COMMAND	Ø	1	Ø	2
*STREET/BUILDING	Ø	1	Ø	3
*CITY, STATE, ZIP	Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø	1	Ø	5
*REQUESTER FSCM	1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL	1	Ø	Ø	5
*BASE DOCUMENT	1	Ø	Ø	6
*SYSTEM APPLICATION	1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM	6	3	6	9
*FORMAT: SIX SECTION DOCUMENT.	Ø	7	Ø	Ø
OR				
ONE SECTION DOCUMENT.	Ø	8	Ø	Ø
REVISION OF AEDPS DOCUMENT NO.	Ø	1	Ø	8
*CONTROL: SOURCE.	6	8	7	3
OR				
SPECIFICATION.	6	8	7	4
UNIT OF MEASURE: U.S.	6	9	4	1
OR				
SI.	6	9	4	2
*SOURCE TABLE	9	A	A	B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART ___ REV ___ NOTICE# ___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø/)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S, I, Z CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.

*TITLE CODE						*REQUESTER NO.					
1	2	3	4	5	6	7	8	9	10	11	12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

CHAR CODE	CHARACTERISTIC VALUE
	1 5 10 15 20 25 30 35 40 45 50 55 60

Supersedes page 275-276 of 25 August 2009

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.