MIL-C-82297B
12 December 1980
SUPERSEDING
MIL-C-82297A
5 January 1976

MILITARY SPECIFICATION

COVERALLS, ARC PREVENTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a one-piece utility coverall, constructed of lightweight cotton twill material.

1.2 Classification The coveralls shall be of one type only, and shall be procured in the following sizes as specified (see 6.2):

Small, Medium, and Large

2. APPLICABLE DOCUMENTS

2.1 Issue of documents The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-F-106 - Fasteners, Slide, Interlocking
V-T-276 - Thread, Cotton
DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86 - Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed)

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-F-10884	- Fasteners, Snap
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-82283	- Cloth, Twill, Cotton, Lightweight

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1668	- Provisions for Evaluating Quality of Cloth Coveralls

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Traffic Department, 1616 P Street, NW Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

*3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2 and 6.2).

3.3 Materials

3.3.1 Basic material The basic material used for the coveralls shall be of a lightweight cotton twill material, conforming to MIL-C-82283.

3.3.2 Thread The thread for seaming and stitching the coveralls shall be cotton, conforming to type IA3, ticket numbers 30 and 50, 3 ply, and type IC2, ticket number A, 3 ply, of V-T-276. The thread used shall be dyed to match the shade of the basic material.

3.3.3 Tape The tape used to reinforce the front seam at the crotch area shall be cotton, conforming to type III, class 3, 1/2 inch in width, of DDD-T-86. The tape shall be dyed to match the shade of the basic material.

3.3.4 Snap fasteners The snap fastener shall conform to style 3, finish 3, of MIL-F-10884.

*3.3.5 Slide fastener The slide fastener for the front closure shall conform to type I, style 3, size LMS, long tab pull, of V-F-106, except that all metal components of the slide fastener shall be fabricated of brass and purchased from the same manufacturer (see 4.4.1).

3.3.5.1 Tape and thong for slide fastener The tape and thong for the slide fastener shall be as specified in V-F-106. The tape shall be dyed to approximate the shade of the basic material, and shall show good fastness to laundering as specified in V-F-106.

3.3.6 Label Each coverall shall have a combination identification, size, and instruction label conforming to type I, classes 1, 2, and 3, of DDD-L-20, except that the label shall bear the following inscription:

COVERALLS, ARC PREVENTIVE
CONTRACT NO: DLA-000-000-0000 (EXAMPLE)
STOCK NO: 8415-00-000-0000 (EXAMPLE)
SIZE: MEDIUM (EXAMPLE)
NAME OF CONTRACTOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

USAGE: This coverall is intended to be worn in warm or temperate climates over the microwave radiation protective coverall to prevent arcing or sparking as required by NAVSHIPS Instruction Manual 0967-316-3010, "Microwave Radiation Protective Gear". The assembly is to be worn with rubber or plastic boots and gloves. In cold or wet weather, raingear or cold weather jacket and trousers may be substituted as overgarments with appropriate gloves and footwear for these conditions.

The printing shall show fastness to laundering only.

3.4 Design The coveralls shall be one-piece with a slide fastener front closure, snap fastener, a breast pocket, front patch pockets, stand-up collar, and long sleeves (see Figure 1).

3.4.1 Figure Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 Pattern parts The component parts of the coveralls shall be cut from the basic material specified in 3.3.1, and in accordance with the pattern parts required for the manufacturing process as follows:

Nomenclature of pattern parts	Cut parts
Front	2
Back	2
Sleeve	2
Top collar	1
Under collar	1
Collar interlining	1
Front inside flap (left side)	2
Breast pocket	1
Breast pocket flap	1
Front patch pocket	2
Reinforcement (cover piece)	1

3.6 Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams, and stitchings Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. When stitch type 401 is used, the looper (underthread) shall be on the inside of the coveralls. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, or open seams will result. Unless otherwise specified, double needle stitching shall be 1/4 to 5/16 inch gauge with the outer row of stitching 1/16 inch from the folded edge.

3.6.2 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

3.7 Manufacturing operations requirements The coveralls shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed, provided that the finished coverall is identical to that produced by following the exact sequence as shown.

3.7.1 Shade and size marking The component parts shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the coveralls. Any method of shade and size marking may be used except:

1. Corrosive metal devices.
2. Sew-on shade tickets.
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the ticket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table 1 - Construction of coveralls

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the coveralls in strict accordance with patterns furnished, which show size and shape of component parts, placement of breast and front patch pockets, directional lines for cutting, and markings for proper assembly of all parts. Directional lines on the fronts and backs may vary from the warp direction, but not more than 1 1/2 inches. Measurements shall be taken at the top and bottom edges of the pattern from the directional lines to the selvage edge (on the even side of lay) of the fabric, and the difference between the two measurements shall not exceed 1 1/2 inches. b. All component parts shall be cut from one piece of material, except for the collar interlining, hanger loop, reinforcement (cover piece), and front inside flap which may be cut from ends. The twill face side of the basic material shall finish as the exposed surface of the coverall. The front inside flap pieces may also be cut from the selvage edge of the basic material. The component parts cut from ends shall approximate the shade of the outside of finished coverall.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1668, shall be removed from production and replaced with non-defective and properly matched components.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table 1 - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Shade and size marking (see 3.7.1) a. All component parts except those cut from ends shall be marked, ticketed, or bundled to insure a uniform shade, size, and proper assembly throughout the garment. b. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show on the outside of the coveralls, and whenever possible, number shall be covered by the seam allowance.					
4.	Assemble and attach breast pocket flap to coverall a. Set socket component of snap fastener in accordance with mark on pattern, with the back of the fastener reinforced with a piece of the basic material approximately one inch square.					
	b. Fold breast pocket flap lengthwise, and stitch both sides 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-12	30/3 30/3	30/3 50/3
	c. Turn breast pocket flap to its finished position and edgestitch the sides and along the bottom 1/4 inch from the folded edge.	301 or 401	SSe-2(b) and OSf-1	10-12	30/3 30/3	30/3 50/3
	d. Set breast pocket flap to left front of coverall in accordance with marking on pattern, and stitch 3/16 inch from the raw edge.	301	LSbk-2(a)	10-14	30/3	30/3
	e. Turn breast pocket flap down, and topstitch 1/4 inch from the folded edge.	301	LSbk-2(b)	10-14	30/3	30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coverall (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Assemble and attach breast pocket flap to coverall (cont'd)					
	f. The finished breast pocket flap shall measure 2 (± 1/8) inches in width and 5 (± 1/8) inches in length.					
5.	Assemble and attach breast pocket to coverall					
	a. Form a hem on breast pocket in accordance with marking on pattern, back to back with the raw edge turned under, and stitch 1/8 inch from each folded edge.	301 or 401	EFt-2 (Inverted)	10-12	30/3 30/3	30/3 50/3
	b. The finished hem shall measure 1 1/4 (± 1/8) inches in width.					
	c. Mark and set stud component of snap fastener on pocket hem, centered in the width and 5/8 (± 1/8) inch from top edge of pocket hem.					
	d. Set breast pocket to left front of coverall in accordance with marking on pattern, and double stitch the sides and bottom with turnunder.	301	LSd-2	10-14	30/3	30/3
	NOTE: The component parts of the snap fastener for the breast pocket and breast pocket flap shall correspond so that the fastened snap serves the intended purpose and does not distort the immediate area.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Assemble and attach front patch pockets to coverall					
	a. Form a hem on each front patch pocket in accordance with marking on pattern, back to back with the raw edge turned under, and stitch 1/8 inch from each folded edge.	301 or 401	EFt-2 (Inverted)	10-12	30/3 30/3	30/3 50/3
	b. The finished hem on each front patch pocket shall measure 1 (± 1/8) inch in width.					
	c. Position each front patch pocket on outside front of coverall as indicated by marking on pattern, with the side edges of pockets even with the side edges of the fronts, and double stitch the inside and bottom edges of pockets with turnunder.	301	LSd-2	10-14	30/3	30/3
	d. The outside edge of the pockets shall be caught in the side seam allowance when closing the sleeves and side seams specified in operation 14.					
	NOTE: The outside edges of the pockets may be stitched to the seam allowance prior to sleeve and side seam closing.	301	SSa-1	10-14	30/3	30/3
7.	Prepare fronts					
	a. Join and stitch left and right fronts of coverall together, starting at crotch and ending approximately 1/2 to 3/4 inch beyond the bottom end of front opening; 1/4 inch from the raw edge.	301	SSad-3(a)	10-12	30/3	30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Prepare fronts (cont'd)					
	b. Spread seam open and flat, with the 1/2 inch tape specified in 3.3.3 centered over the seam and extending 1 to 1 1/4 inches beyond the front opening, and double stitch with the stitching extending to the top edge of tape.	301 or 401	SSad-3(b)	10-12	30/3 30/3	30/3 50/3
	c. Overedge stitch edge of right front from top to bottom.	503 or 504	SSa-1	8-10	30/3	30/3
8.	Assemble front inside protective flap pieces					
	a. Stitch the flap pieces around both sides and along the bottom 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-12	30/3 30/3	30/3 50/3
	b. Turn to finished position, and edgestitch the sides and along the bottom 1/16 inch from the folded edge.	301	SSe-2(b)	10-12	30/3	30/3
9.	Attach slide fastener					
	a. Position right half of slide fastener on right front, with the edge of fastener tape even with the right front edge, and stitch 1/4 inch from the raw edge to finish with the bottom edge of tape 5 (+ 1/2) inches from the crotch and with the top scoop 3/8 to 1/2 inch below the neckline.	301	SSa-1	10-12	30/3	30/3
	b. Fold under right front edge as indicated by marking on pattern, and stitch 3/8 inch from the folded edge. Edge of fastener scoops shall be even with the folded edge of right front.	301	SSb-1	10-12	30/3	30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Attach slide fastener (cont'd)					
	c. Position left half of slide fastener on left front to correspond with right half of slide fastener on right front, with the edge of fastener tape even with left front edge. Superimpose the front inside flap over the slide fastener, with the raw edges of flap even with the edge of tape and front edge, and stitch 1/4 inch from the raw edge.	515 or 516 or 519 or 517 or 518	SSa-2	10-12	30/3 (chain) & 50/3 (overedge)	50/3
			SSa-2	10-12	30/3 (lock) & 50/3 (overedge)	30/3 50/3
	d. Fold under left front edge as indicated by marking on pattern, and stitch 3/8 inch from folded edge. Edge of fastener scoops shall be even with the folded edge of left front, and the front inside flap shall extend 2 1/2 (± 1/8) inches beyond the folded edge.	301	Similar to LSe-1	10-12	30/3	30/3
	Note: When the slide fastener is in the close position, the folded edges of the front closure shall butt to conceal the slide fastener.					
10.	Assemble back of coverall					
	Join and stitch the back pieces at center back with a double stitched and double lapped seam, left back over right back, starting from the bottom of crotch to the top edge of neckline.	301 or 401	LSc-2	10-12	30/3 30/3	30/3 30/3
11.	Attach backs to shoulders					
	Join the backs to fronts at shoulder edges with a double stitched and double lapped seam, back lapped over fronts.	301 or 401	LSc-2	10-12	30/3 30/3	30/3 30/3

NCTR Form 1, 15 Sep 1967

MIL-C-8229B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12	Assemble and attach collar to coverall a. Superimpose the top collar piece, collar interlining piece, and under collar piece together, and stitch 1/4 inch from the raw edge the two sides and along the top collar.	301	SSe-2(a)	10-12	30/3	30/3
	b. Trim corners neatly and then turn to the outside carrying the interlining piece with the undercollar piece.					
	c. Set and stitch undercollar and interlining pieces to neckline, 3/8 inch from edge.	301	SSa-1	10-12	30/3	30/3
	d. Turn collar to finished position, and stitch the top collar piece down along neckline 1/16 inch from the fold.	301	LSb-1	10-12	30/3	30/3
	e. Topstitch sides and top of collar 1/4 to 5/16 inch from fold.	301	SSe-2(b)	10-12	30/3	30/3
	NOTE: The top collar is on the outside when the garment is worn.					
13	Join sleeves to armholes Set and stitch sleeves to armholes with a double stitched and double lapped seam, fronts and back lapped over sleeves.	301 or 401	LSc-2	10-12	30/3 30/3	30/3 50/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil - Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Close sleeves and join back and fronts at sides Close underarm seam of sleeves and join back and fronts at sides, catching the outer edge of front patch pockets when applicable, with a double stitched and double lapped seam. The front of sleeve shall overlap the back of sleeve and the fronts shall overlap the back at side seam.	301 or 401	LSc-2	10-12	30/3 30/3	30/3 50/3
15.	Close leg inseam Close the leg inseams with a double stitched and double lapped seam, fronts lapped over back.	301 or 401	LSc-2	10-12	30/3 30/3	30/3 50/3
16.	Hems a. Turn under the bottom raw edges of sleeves 1/4 inch and stitch 1/16 inch from inner folded edge. The finished hem shall measure 1 1/4 (± 1/4) inches in width.	301	EFb-1	10-12	30/3	30/3
	b. Turn under the bottom raw edges of legs 1/4 inch and stitch 1/16 inch from inner folded edge. The finished hem shall measure 1 1/4 (± 1/4) inches in width.	301	EFb-1	10-12	30/3	30/3
17.	Attach hanger loop a. The loop shall be made by folding a piece of the basic fabric to the center with the edges abutting, and stitch with a covering stitch on the underside.	402 or 406	EFh-1	10-12	30/3	30/3
	b. Bartack hanger loop with ends turned under to the inside back of coverall, centered over the center back seam on the collar seam.	Bartack	LSd-1 (each end)	28 per bartack	30/3	30/3
	c. The finished hanger loop shall measure 1/4 to 3/8 inch in width, and shall have a free opening of 2 1/2 to 2 3/4 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Attach label Position the label specified in 3.3.6 on the inside of coverall, centered on the center back seam and 1 (± 1/4) inch below neckline, and stitch around all four sides 1/16 inch from edge.	301	-	10-12	30/3	30/3
19.	Attach stud portion of snap fastener to front inside flap a. Set the stud portion of snap fastener to front inside flap, positioned 5/8 inch from outside top corner and front edge. b. Position reinforcement (cover piece) on inner corner of front inside flap, covering the base of stud c. Turn under the three sides approximately 1/4 inch and stitch 1/16 to 1/8 inch from folded edge.	301	SSb-1	10-12	30/3	30/3
20.	Attach socket portion of snap fastenenr to right front of coverall a. Set the socket portion of snap fastener on inside right front of coverall to correspond to stud component on front inside flap. b. Reinforce socket portion of snap fastener, by placing a 5/8 inch square piece of the basic material underneath the socket.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
21	Make bartacks					
	a. Reinforce bottom of front slide fastener tape with a 3/8 to 1/2 inch horizontal bartack positioned 1/8 to 1/4 inch below slide fastener stop.	Bartack	-	28 per bartack	A/3	A/3
	b. Reinforce inner corner edges of front patch pockets at the top opening with a 3/8 to 1/2 inch horizontal bartack, with the stitching securely covering the width of the double row of stitching.	Bartack		28 per bartack	A/3	A/3
22	Cleaning					
	a. Trim all thread ends and remove loose threads.					
	b. Remove all spots and stains.					
	c. Remove all shade tickets and markings.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

3.8 Measurements The sizes and measurements of the finished coveralls shall be in accordance with Table II. All measurements and tolerances are expressed in inches and shall be made with the coverall placed smooth and flat and with the slide fastener fully closed.

Table II - Finished measurements

Measurement	Size			Tolerance
	Small	Medium	Large	
Chest (A)	43 1/2	47 1/2	51 1/2	± 1
Leg width (B)	21	21	21	± 1/2
Leg inseam (C)	29	30	31	± 1/2
Sleeve inseam (D)	20 1/2	21 1/2	22 1/2	± 1/2

NOTE: A through D refer to Figure 1.

A. Twice the measurement taken across front at base of armholes, folded edge to folded edge.
B. Twice the measurement taken across width of leg hem, folded edge to folded edge.
C. Measurement taken along the leg inseam from the junction of the crotch and center back seams to bottom edge of leg opening.
D. Measurement taken along the sleeve inseam from the base of the armhole seam to the bottom edge of sleeve opening.

* 3.9 Workmanship The finished coverall shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-1668.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

*4.3 First article inspection The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2. For compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection Inspection shall be performed in accordance with MIL-STD-1668.

4.4.1 Component and material inspection In accordance with 4.1, components and material shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, a certificate of compliance shall be submitted by the contractor for the material components of the slide fastener (see 3.3.5).

4.4.2 End item examination Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1668.

5. PACKAGING

5.1 Preservation-packaging Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A

1. Each coverall shall be folded as follows:

   a. Close slide fastener and fasten snaps.
   b. Place coverall front down and flat, with the sleeves and legs fully extended.
   c. Bring legs up even with the back shoulder line.
   d. Fold sleeves at right angles across the back.
   e. Fold the length of coverall in half to measure 14 1/2 inches.
   f. Fold the sides of coverall in toward the center.
   g. The completely folded coverall shall measure approximately 14 1/2 inches by 11 inches.

2. Five coveralls, of one size only, shall be stacked in a bundle alternately reversed top to bottom, and securely cross-tied with a suitable cotton tape or twine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

5.1.2 Level C (Commercial packaging) Coveralls shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The contractor may use his standard practice when it meets this requirement. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2).

*5.2.1 Level A Thirty (30) coveralls, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 3A, of MIl-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c, of MIL-B-17757. Level A packages shall be packed flat within the shipping container, two in length, one in width, and three in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.2 Level B Thirty (30) coveralls, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, grade 275, size 3A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275, of MIL-B-17757. Level A packages shall be packed flat within the shipping container, two in length, one in width, and three in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial Packing) Coveralls, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

5.3 Marking In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes Each shipping container packed with mixed sizes shall have securely attached to the end and sides, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity of sizes contained therein.

6. NOTES

6.1 Intended use The coverall specified herein is intended to be worn over the metalized microwave radiation protective coverall (MIL-C-82296) to prevent arcing or sparking. It is used in moderate and summer temperatures, when no other environmental overgarments are worn.

*6.2 Ordering data Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. When first article is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns For access to samples and patterns, address the procuring office issuing the invitation for bids.

6.4 Marginal notations The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - NU
Air Force - 11

Review activities:
Navy - SH, MS
Air Force - 99

User activities:
Navy - OS, MC

Preparing Activity:
Navy - NU

Project No. 8415-N036

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

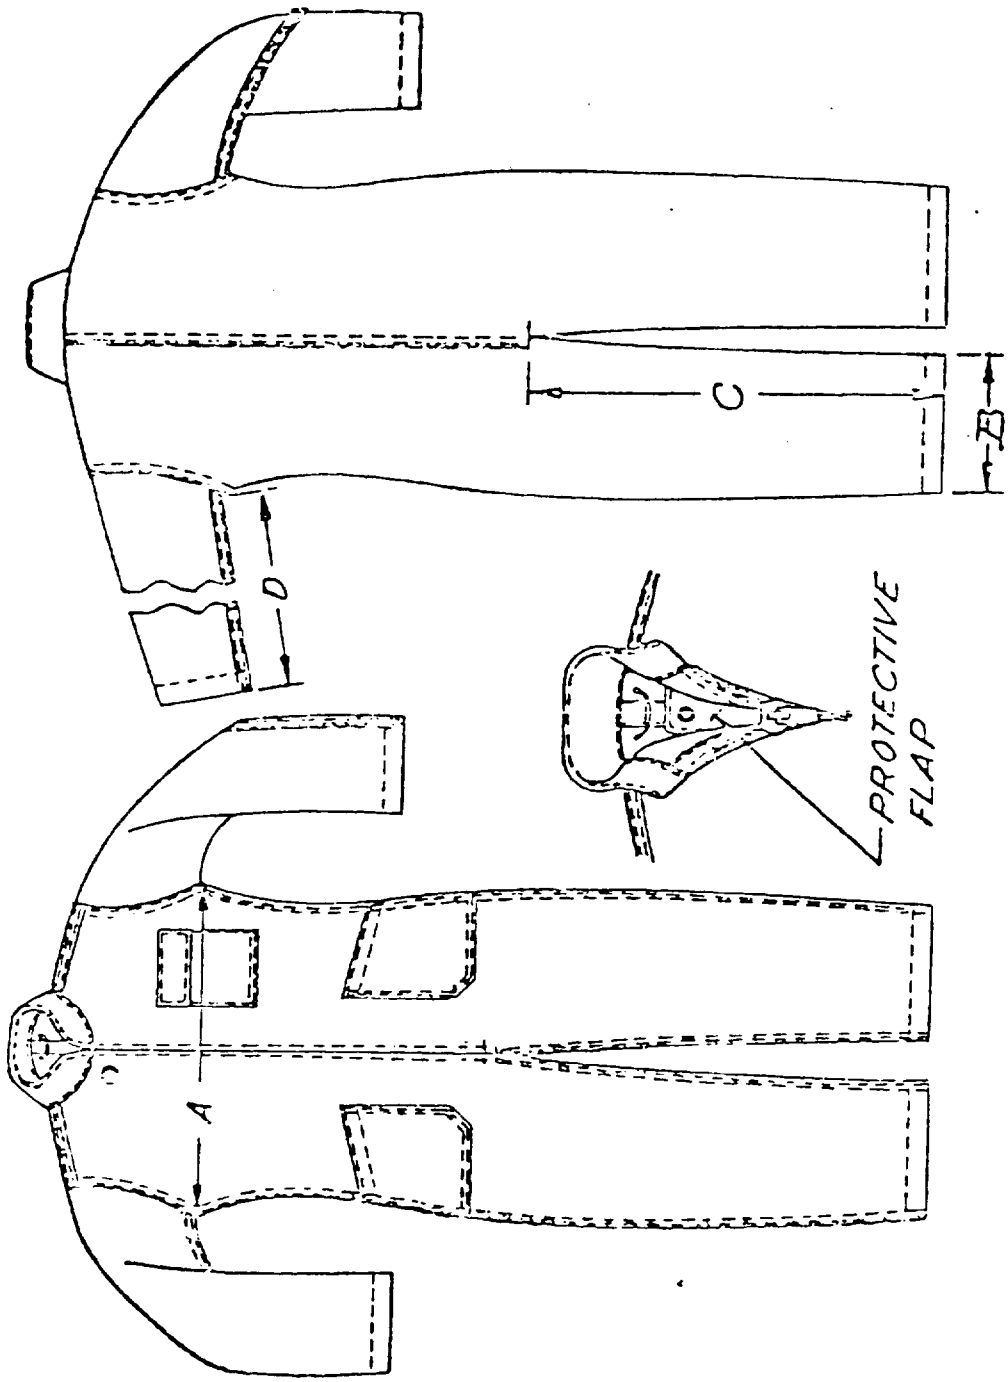


FIGURE 1. COVERALLS, ARC PREVENTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer In Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-82297B COVERALLS, ARC PREVENTIVE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:01Z
Check the source to verify that this is the current version before use.