MIL-R-52768(ME)
21 November 1973

MILITARY SPECIFICATION

FOR

RAILWAY CAR, FLAT, DEPRESSED CENTER
HEAVY DUTY, 150 TON, DOMESTIC SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers heavy duty depressed center flat-cars, for domestic service.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-P-3320	- Painting and Marking: Freight and Maintenance Cars.
MIL-P-3558	- Plate, Identification, Locomotive, Railway Cars, and Work Equipment.

STANDARD

Military

MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standard required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 2220

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

AMERICAN WELDING SOCIETY

Standard Qualification Procedure

(Application for copies should be addressed to the American Welding Society, 2501 Northwest Seventh Street, Miami, FL 33125.)

DEPARTMENT OF TRANSPORTATION (DOT)

United States Safety Appliances for All Classes of Cars and Locomotives.

(Application for copies should be addressed to the US Department of Transportation, Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

ASSOCIATION OF AMERICAN RAILROADS (AAR)

Specifications for Design, Fabrication and Construction of Freight Cars:

Single Car Testing Device - Code of Test.
Supplement to Manual of Standards and Recommended Practices.
Equipment Diagram, AAR Plates B and C for Unlimited Interchange Service.
Specification No. 2518 Installation of Freight Car Brake Equipment.
Specification for Testing Special Devices to Control Stability of Freight Cars Specification D-65.
Interchange Rules.

United States Safety Appliances for All Classes of Cars and Locomotives.
Manual of Standards and Recommended Practices:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

Mechanical Divisions:

Section A - Specifications for Material:
M-110 Rivet Steel and Rivets.
M-114 Helical Springs, Heat Treated Steel.
M-116 Steel, Structural, Shapes, Plates and Bars.
M-125 Machine Bolts and Nuts.
M-201 Steel Castings.
M-404 Unions and Pipe Fittings 300-Lb. Pressure.
M-601 Hose, Air-Brake and Train Air-Signal.
M-922 Self Locking Nuts for Self Locking Cap Screws.

Section E - Brakes and Brake Equipment.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren Street, Chicago, IL 60605.)

FEDERAL RAILROAD ADMINISTRATION (FRA)

United States Safety Application for All Classes of Cars and Locomotives

(Application for copies should be addressed to the Federal Railroad Administration, 2100 Second Street SW, Washington, DC 20590.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A36 Structural Steel.
A53 Welded and Seamless Steel Pipe.
A572 High Strength Low Alloy Columbium Vanadium Steel of Structural Quality

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Description. The car shall be the depressed center type, 150-ton capacity, 21 foot depressed center platform, 56-1/2-inch gage in accordance with the applicable Association of American Railroads (AAR) requirements. The underframe shall be cast steel, or riveted, or welded, or a combination of riveted and welded construction. Cars shall be constructed in accordance with AAR specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

3.1.1 Drawings. The supplier is responsible for preparing his own shop drawings. No deviation from the specified dimensions is permissible without prior approval of the contracting officer.

3.2 First article (first-produced cars). The supplier shall furnish a car for examination and test within the time frame specified (see 6.2), to prove prior to starting production that his production methods and choice of design detail will produce cars that comply with the requirements of this specification. Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Materials. Materials shall conform to applicable AAR and commercial specifications currently used by the railroad industry for this type of equipment unless otherwise specified herein.

3.3.1 Threaded parts. Threaded parts shall conform to Handbook H28. The American National fine thread series shall be used for threaded parts less than 1/4 inch diameter. The Unified or American National coarse thread series shall be used for threaded parts 1/4 inch diameter and larger; however, the American National fine thread series may be employed for these sizes when applicable. Airbrake pipe threads shall conform to the American National pipe thread series.

3.3.2 Steel. Structural steel shall conform to ASTM A36 (AAR #116) or A572, grade 50, type 2. Casting shall conform to AAR M-201, grades B and C. Rivets, if used, shall conform to AAR M-110.

3.3.3 Pipe and fittings. Pipe shall be steel conforming to ASTM A53. Pipe fittings shall conform to AAR M-404.

3.3.4 Bolts, nuts, and capscrews. Bolts and nuts shall conform to AAR M-125. Self-locking nuts and capscrews shall conform to AAR M-922.

3.3.5 Substitution of materials. Materials not conforming to the specifications referenced herein shall not be substituted, unless such substitutions are specifically approved by the contracting officer and; (1) it is clearly demonstrated that an improvement in operating characteristics, a saving in weight, conservation of critical or strategic materials, or a reduction in cost without sacrifice of reliability can be accomplished thereby; (2) that such substitutions will not preclude the subsequent use of specified materials in effecting repairs or replacements. Requests for approval of such substitutions shall be accompanied by completely detailed supporting data which clearly illustrate the use of the proposed substitute material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

3.4 Interchangeability. Jigs, templates, gages, and fixtures shall be used to insure interchangeability of like components and parts with respect to assembly, performance and quality. All parts having the same part number shall be functionally and dimensionally interchangeable.

3.5 Tolerances and fits. Tolerances and fits shall conform to appropriate AAR Manuals applicable to railway cars unless otherwise specified herein.

3.5.1 Adjustments. All parts and components subject to adjustment or replacement by operating or maintenance personnel shall be accessible. Adjusting facilities where provided shall operate without interference and shall maintain such adjustments under all conditions of service.

3.6 Dimensions and weight. Dimensions and weight of the car shall be as follows:

	6-Wheel Trucks	Double 4-Wheel Trucks
Length over Striking Plates	61'-6" (nom.)	72'-0" (nom.)
Length of Flat Depressed Section	21'-0"	21'-0"
Width of Car Platform	9'-0" (min.)	9'-0" (min.)
Height from rail to top of bed of Depressed Center Section (light car conditions)	2'-0" (max.)	2'-0" (max.)
Truck Centers	43'-0" (nom.)	47'-0" (nom.)
Lightweight of Car	115,000 Lbs. (max.)	125,000 Lbs. (max.)

3.6.1 Clearance. Clearance dimensions shall not exceed those shown on AAR Plate B for unrestricted interchange service. Car with equipment (figures 2 and 3) shall be within clearance limitations of AAR Plate C.

3.6.2 Curvature. The car shall be capable of negotiating a 46-degree curve (125-foot radius) when uncoupled. Car shall be capable of negotiating a 125-foot-radius curve when coupled by an auxiliary type coupler similar to National 31629 (see 4.5.2.8).

3.7 Design and construction. Design and construction shall be in accordance with the AAR Specifications for Design, Fabrication and Construction of Freight Cars and AAR Supplement to the Manual of Standards and Recommended Practices, except as specified herein. Static car test loading, impact testing, and static vertical lift coupler jacking testing in accordance with AAR Specifications shall not result in negative camber

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

or visible permanent deformation. Structural members shall be free of notch sensitive areas and discontinuities that could result in highly localized stress concentrations. A full set of drawings and design calculations shall be submitted to Secretary, Operations and Maintenance Department, Mechanical Division, AAR, for approval of cars as required by AAR. When specified (see 6.2), structural analysis and a Cooper Rating of the car in accordance with the specifications stated above shall be submitted by the car builder. Unless otherwise specified herein, all welding shall be in accordance with the latest applicable codes of the American Welding Society. The car shall be designed for the following load carrying capacity:

(a) 75 percent of the load concentrated on a knife edge at center of car.
(b) 100 percent of load uniformly distributed over 21 feet measured longitudinally, 10 feet 6 inches on each side of transverse centerline of car.
(c) Under loaded car conditions, no part of car body shall be less than 7 3/8 inches above the top of running rail under all allowable wear and spring deflection conditions.
(d) The car shall carry a load of 150 tons equally distributed over the mounting pads in car bed indicated on figures 1a and 1b.

3.8 Underframe. The underframe shall be cast steel, or riveted, or welded, or a combination of riveted and welded construction in accordance with AAR Manual of Standards and Recommended Practices and supplement thereto. The bottom flanges of all longitudinal structural members on the underside of the depressed section of the underframe shall be at the same height above top of rail to the maximum width of Plate B clearance diagram. Steel shall conform to ASTM A36 (AAR M-116) or ASTM A572. The center filler, draft lugs, body center plate, and strikers shall be an integral part of the underframe.

3.8.1 Pad areas. The pad areas in car bed shall be in accordance with figures 1a and 1b.

3.9 Decking. The depressed center section to be covered shall be as specified on figure 1a. All other platform areas to be covered shall be covered with antiskid steel floor plate conforming to ASTM A36. Floor plate shall be welded to the underframe.

3.10 Couplers. Couplers shall be AAR approved and shall be the end-of-car cushioning type. Cushioning shall have 15 inch travel. Couplers shall be rotary bottom operated with coupler operating levers at diagonal corners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

3.11 Brake system.

3.11.1 Airbrakes. Airbrakes shall be furnished and shall consist of dual AB1012 brake systems with ABD control valves and automatic slack adjusters or truck mounted brake system. Airbrake installation shall be in accordance with AAR Manual of Standards and Recommended Practices, Section E and Specification No. 2518 adopted by AAR, as applicable. Brake shoes shall be in accordance with the latest AAR requirements at time of contract award. The car brake piping system shall withstand an air pressure of 90 psi with a maximum pressure drop of 2 psi per minute. Brake valves and breathers shall be protected from damaging effect of road splash. Cars shall pass single car test code of test as specified in AAR leaflet 5039-4, supplement 1, or latest revision.

3.11.2 Braking force. Net airbrake and handbrake force, as determined by a static brake test shall conform to AAR requirements.

3.11.3 Airbrake hose. Airbrake hose shall conform to AAR M-601.

3.11.4 Slack adjuster. When provided the slack adjuster shall be automatic and shall have a range of adjustment which will permit brake shoes to clear wheel tread surfaces with all shoes worn to limit or with all shoes new and full thickness. Slack adjusters shall be AAR approved.

3.11.5 Handbrakes. Each car shall be equipped with two handbrakes; one applied at each side of the car in diagonal locations and shall be approved by FRA and AAR. Handbrakes shall not foul the underframe or other components of the car.

3.11.6 Badge plate. A metal badge plate, cast, etched, or stamped, showing brake rigging and dimensions as specified in AAR Manual of Standards and Recommended Practices, Section E, shall be attached in an accessible location near each applicable system.

3.12 Trucks. Trucks shall be designed for a 150 ton minimum capacity car and shall be an AAR approved design. The trucks shall have built-in snubbers and external hydraulic snubbing devices arranged to dampen vertical and lateral accelerations.

3.12.1 Wheels. Wheels shall be 33 inch minimum diameter, multiple-wear type in accordance with AAR Manual of Standards and Recommended Practices. Wheels shall be mounted in accordance with AAR requirements.

3.12.2 Axles. Axles shall be in accordance with AAR requirements. Ends of axles shall be drilled and tapped for roller bearing retaining caps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

3.12.3 Roller bearings. Roller bearings shall be AAR approved, applicable to interchange freight cars. Grease fittings shall be AAR approved pressure type.

3.12.3.1 Locking plate. Each roller bearing assembly shall include a locking plate in accordance with AAR Manual of Standards and Recommended Practices.

3.12.4 Springs. Springs shall conform to AAR M-114. The spring travel shall be compatible with hydraulic snubbing device used. The solid spring group capacity shall conform to AAR requirements.

3.13 Side bearings. Each car shall be equipped with AAR approved double roller-type side bearings or friction-type bearings adjusted to AAR specifications.

3.14 Identification plates. An identification plate conforming to MIL-P-3558, type II, shall be attached to the car underframe in a visible location.

3.15 Painting and marking. Painting and marking shall conform to MIL-P-3320, color 14064. Reporting marks shall be DODX in lieu of USAX as specified in MIL-P-3320. Additional markings shall be in accordance with AAR specifications. Car numbers conforming to MIL-P-3320 shall be applied and shall be provided by the contracting officer.

3.16 Lubrication. Roller bearings shall be grease lubricated in conformance to AAR requirements and applied in quantities approved by the bearing manufacturer. Truck centerplates shall be lubricated in accordance with AAR recommended practices.

3.17 Safety appliances. Safety appliances shall conform to United States Safety Appliances for All Classes of Cars and Locomotives in accordance with AAR, DOT or FRA where applicable. All handholds and ladder treads shall be hot-formed and rivet or boltholes shall be hot-punched. Sill steps shall conform to AAR standards.

3.18 Routing cardboard. An AAR approved routing cardboard shall be applied to each side of the car number.

3.19 Placard holders. A metal placard board shall be applied to each side of the car and to each end of the car.

3.20 Defect cardholder. AAR type defect cardholder shall be applied to each car.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

3.21 Automatic car identification (ACI) plate. ACI label mounted on plate shall be applied to each side of the car in accordance with AAR requirements.

3.22 Workmanship. Workmanship for fabrication and construction shall be in accordance with AAR Specifications for Design, Fabrication, and Construction of Freight Cars.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Acceptability criteria. Cars which conform to all requirements in sections 3 and 5 of this specification and pass all applicable examinations and tests in section 4 of this specification and meet requirements of the AAR Rules of Interchange will be considered acceptable by the Government.

4.1.2 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards or for providing evidence that components have been previously approved by AAR.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) First-produced car inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 First-produced car inspection. The first-produced car which shall have been produced from production tooling shall be examined and tested to determine conformance to the requirements of this specification.

4.3.1 Examination. The first-produced car shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

4.3.2 Tests. The first-produced car shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each car shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each car shall be tested as specified in 4.5.2 through 4.5.2.7. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. Each car shall be examined for the following defects:

101. Material not as specified.
102. Parts and components not interchangeable.
103. Threaded parts not as specified.
104. Car dimensions exceed dimensions shown on AAR Plate B.
105. Dimensions not as specified.
106. Placard holders not furnished or applied as specified.
107. Safety appliances not as specified.
108. Lubrication not as specified.
109. Identification plate not as specified.
110. Painting and marking not as specified.
111. Certification of construction and design approval not in accordance with AAR Specifications.
112. Workmanship not as specified.
113. Tolerances and fits are not as specified.
114. Brake equipment not as specified.
115. Defect cardholder not furnished or applied as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. Prior to tests, the car shall be lubricated in accordance with AAR requirements. Any tests required by AAR shall be in accordance with AAR specifications, and as specified herein.

4.5.2.2 Airbrake. The entire airbrake system shall be tested to insure correct functioning of all components. The car shall be tested with a single car testing device in accordance with AAR code for type of brake equipment. All pipe joints shall be tested for leaks at an air pressure

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

of 90 psi. The brake cylinder piston travel shall be as specified in Air Brake Specification No. 2518 and shall be tested for interference and correct travel. Nonconcormance to 3.11 or AAR requirements shall constitute failure of this test.

4.5.2.3 Braking force. Test in accordance with AAR requirements. Determine brake shoe pressure at shoe. Nonconformance to 3.11.2 shall constitute failure of this test.

4.5.2.4 Handbrake. The specified braking force shall result from application of 220 pounds at the handbrake. The brake shoe pressure shall be determined at each wheel. Nonconformance to 3.11.5 shall constitute failure of this test.

4.5.2.5 Side bearing clearance. With the car on level tangent track and the car body level, side bearing clearance shall be measured at each bearing. Nonconformance to AAR standard limits shall constitute failure of this test.

4.5.2.6 Slack adjuster. The slack adjuster when provided, shall be tested for range of travel. Nonconformance to 3.11.4 shall constitute failure of this test.

4.5.2.7 Load. The car shall be loaded in accordance with design loads specified in 3.1 and 3.7. There shall be no permanent resulting negative deflection in frame or unbalance of deck. Nonconformance to 3.1 or 3.7 shall constitute failure of this test.

4.5.2.8 Curvature. The car, uncoupled, shall be moved through a 125-foot-radius curve. At maximum swing, the brake rigging and the car body rigging shall be inspected to determine that clearances have been provided and the brake systems function as specified. A car coupled to a locomotive by means of an auxiliary coupler similar to National 31629 shall be moved through a 125-foot-radius curve to determine that the coupled units can negotiate the curve. Nonconformance to this test or 3.6.2 shall constitute failure.

4.5.2.9 Stability test. The car shall be stable when similarly tested in accordance with AAR Specification D-65, Manual of Standards and Recommended Practices. Loading characteristics shall be in accordance with figures 2 and 3. Nonconformance to AAR requirements shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

4.5.2.10 Static vertical coupler load. With car loaded to 100 percent of specified capacity evenly distributed over entire deck, apply vertical load to coupler, in accordance with AAR requirements for cushion underframe cars having sliding sills, and hold for 60 seconds. Nonconformance to 3.7 or AAR requirements shall constitute failure of this test.

4.5.2.11 Impact test. The ability of the car to withstand impact performed to AAR test criteria shall be proven as required by the AAR Specifications for Design, Fabrication, and Construction of Freight Cars. Nonconformance to 3.7 and AAR requirements shall constitute failure of this test.

4.5.2.12 Tapped holes. Tapped holes located in pad areas specified in 3.8.1 shall be subjected to a static load force of 90,000-100,000 pounds for a minimum of 10 minutes. Load force shall be applied in both a vertical and longitudinal direction. Evidence of cracks or deformation after loading shall constitute failure of this test.

4.6 Inspection of preparation for delivery. Preservation, packaging, packing, and marking shall be inspected to determine conformance to section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Car. Each car shall be prepared for delivery in accordance with AAR Requirements for Interchange Service.

5.2 Marking. Marking for shipment shall be in accordance with MIL-STD-129. Additional marking shall be as required by applicable AAR Rules and Regulations.

6. NOTES

6.1 Intended use. The domestic service depressed center flatcar is intended to transport Government shipping containers which will be attached to the car by the Government.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first-produced car (see 3.2).
(c) When AAR structural analysis and Cooper Rating is required (see 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

6.3 First-produced cars. Any changes or deviations of production cars from the approved first-produced car during production will be subject to the approval of the contracting officer. Approval of the first-produced car will not relieve the supplier of his obligation to furnish cars conforming to this specification.

6.4 Data requirements. The contracting officer should include requirements for such data as technical publications, drawings, instructional materials, illustrated parts lists, Universal Machine Language Equipment Register (UMLER) Card and Document Input, and supplier's maintenance and operation manual to be furnished as considered necessary with each car.

6.5 Drawings. Drawings shall be made available to the contracting officer prior to submission of first-produced car.

6.6 Car numbers. Contracting officer should arrange to furnish car numbers to the supplier to be applied to each car (see 3.15).

6.7 Certificate of compliance. When a certificate of compliance is submitted in lieu of a test, engineering data and computations as required for an engineering analysis shall be furnished. The certificate shall be signed by a duly authorized agent to the supplier.

6.8 Preparation for delivery. Levels of preparation for delivery have not been included as the cars are for domestic service and will be delivered over the rails. Storage periods exceeding normal domestic limitations are not anticipated.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 2220-A158

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.


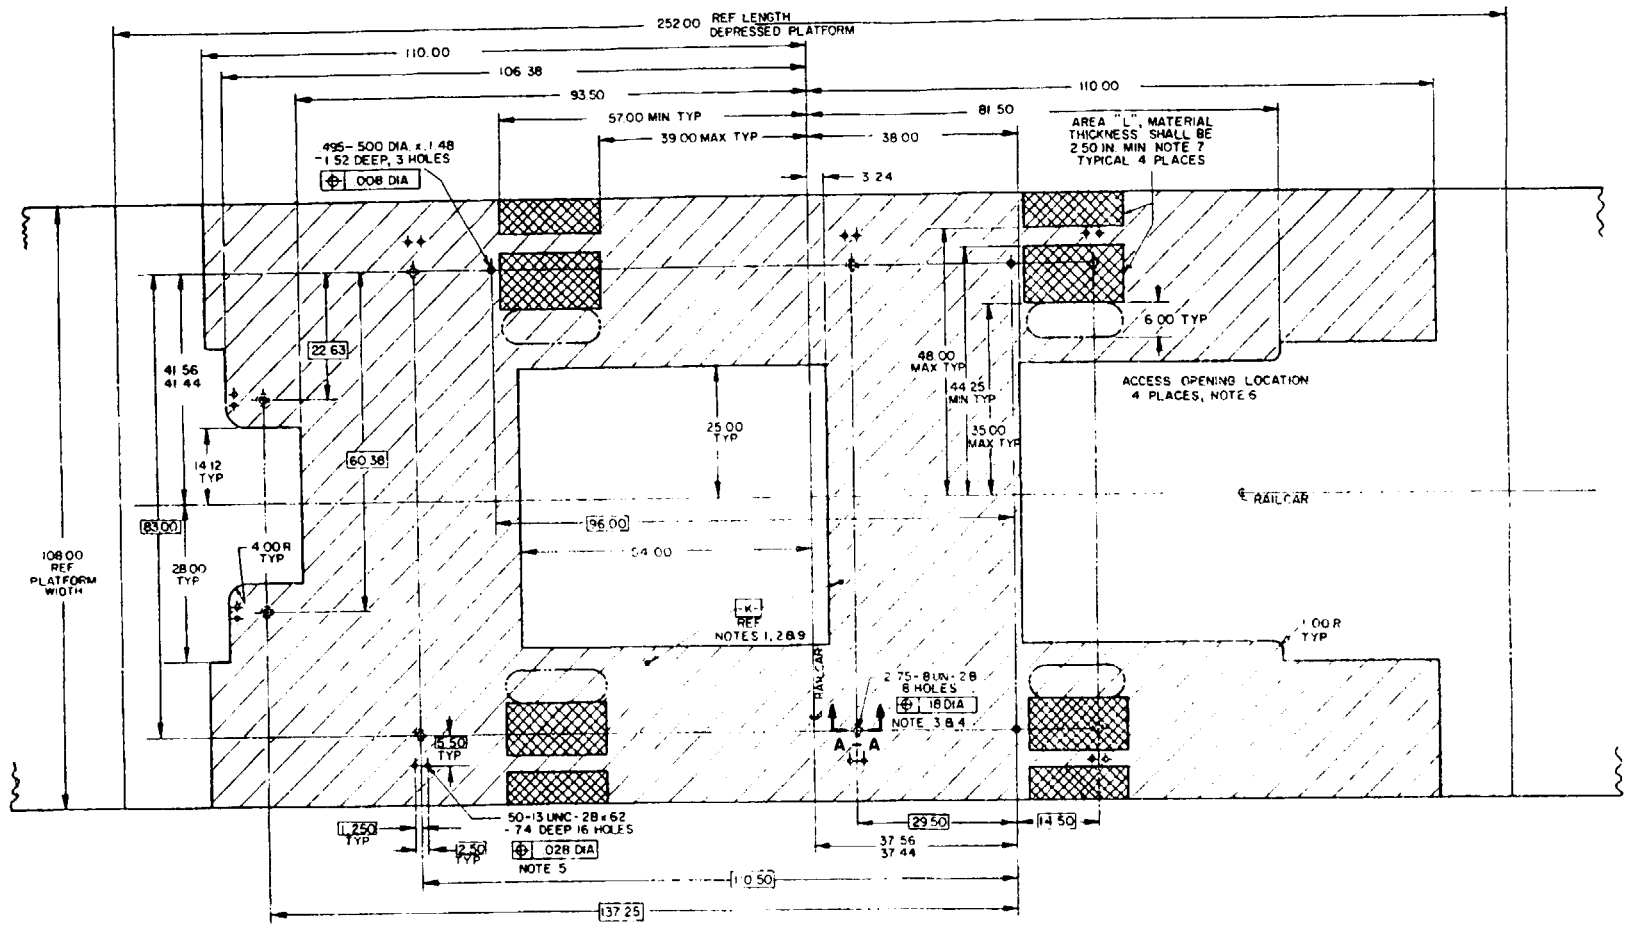


FIGURE 1a.

PLAN VIEW—DEPRESSED CENTER RAILCAR

X-2634

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

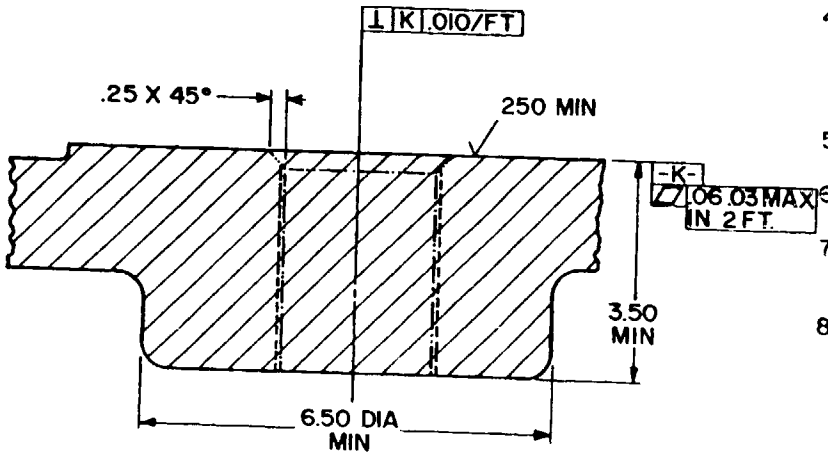

SECTION A-A

SHOWING BOSS AT 2.75-8 TAPPED HOLE LOCATION TYPICAL 8 PLACES

1. RAILCAR SHALL BE FURNISHED WITH SURFACE "K" MACHINED AND WITH THE MIN MATERIAL THICKNESS AT HOLE LOCATIONS AND AREAS AS SPECIFIED.
2. RAILCAR PLATFORM OTHER THAN SURFACE "K" (SHADED AREA - MIN REQD SURFACE SHOWN) MAY BE AT ANY HEIGHT, FLATNESS OR ROUGHNESS PROVIDED IT IS NOT ABOVE SURFACE "K" OR MORE THAN .25 IN. BELOW SURFACE "K".
3. 2.75-8 TAPPED HOLES ARE SHOWN TO INDICATE MIN MATL THICKNESS REQUIRED.
4. EACH OF THE (8) 2.75-8 TAPPED HOLE LOCATIONS SHALL HAVE THE CAPABILITY OF WITHSTANDING A FORCE OF 90,000-100,000 LBS FOR A MINIMUM OF 10 MINUTES WITH NO EVIDENCE OF CRACKS OR DEFORMATION.
5. .50-13 TAPPED HOLES ARE SHOWN FOR INFORMATION ONLY.
6. ACCESS OPENING LOCATIONS ARE SHOWN SO THAT ACCESS OPENINGS MAY BE ADDED IN PLATFORM.
7. SPACE BELOW AREA "L" ON SURFACE "K" SHALL REMAIN CLEAR FOR BOLTING PURPOSES. (1.50-6 X 9.00 LG SOC HD CAPSCREW)
8. THIS INTERFACE DWG IS DESIGNED TO ACCOMODATE TWO DIFFERENT SHIPPING CONTAINER MOUNTINGS (A&B)

RAILCAR APPLICATION	
CONTAINER	REQUIREMENTS
A	SURFACE "K" (3) .495-.500 DIA HOLES (8) 2.75-8 HOLES (16) .50-13 HOLES
B	SURFACE "K" ACCESS OPENINGS


9. APPLY A THIN FILM (.002 IN-.005 IN REF) OF SURFACE PRESERVATIVE (TECTYL 502-C FREEDOM VALVOLINE OIL CO.) TO SURFACE "K". REMOVE ALL EXCESS PRESERVATIVE INCLUDING RUNS & DRIPS. PAINT IS PROHIBITED ON THIS SURFACE.

FIGURE 1b

RAILCAR INTERFACE REQUIREMENTS FOR SHIPPING CONTAINER MOUNTING. SEE NOTE 8

X-2635

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

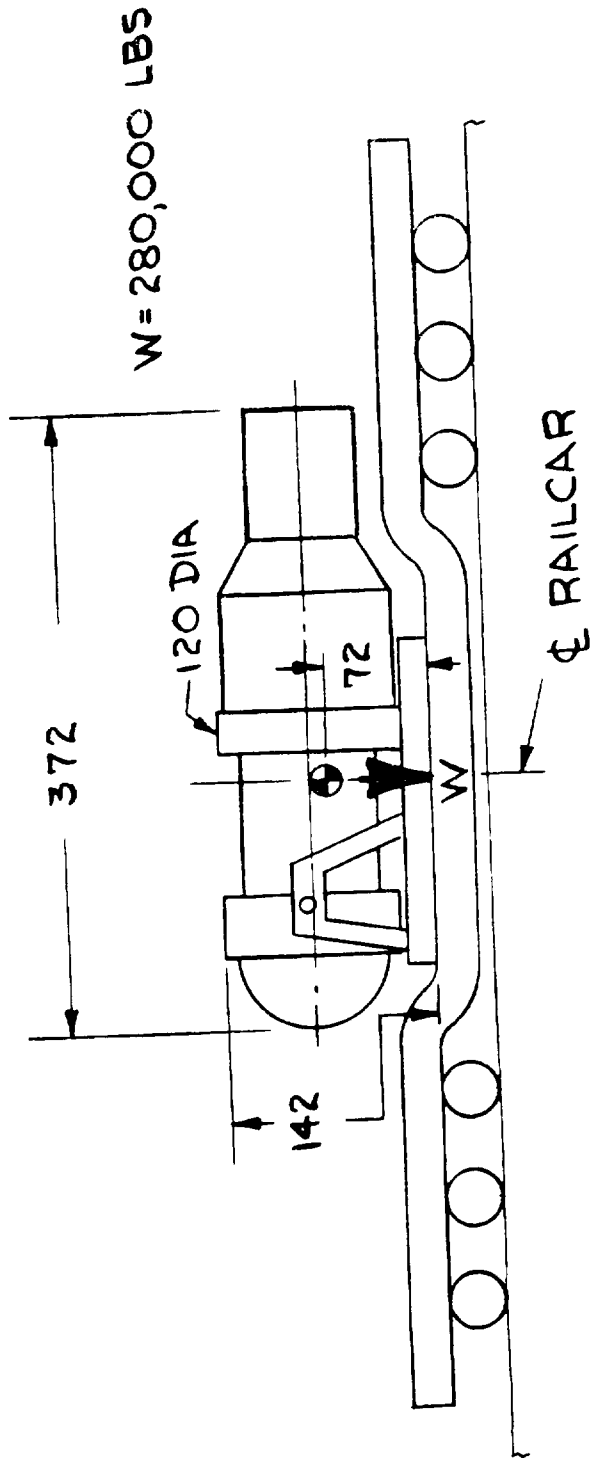

X2636

FIGURE 2. CONTAINER A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

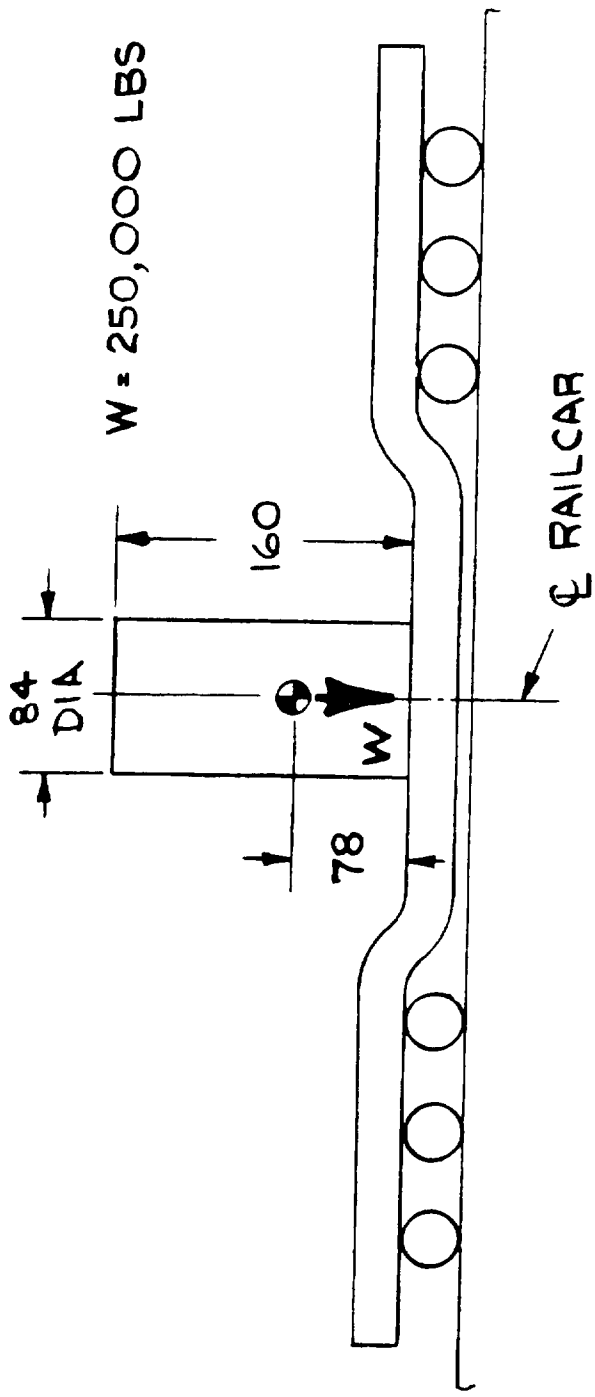


FIGURE 3. CONTAINER B

X2637

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Center
Attn: AMXRB-DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.