INCH-POUND
MS25331D
10 May 2021
SUPERSEDING
MS25331C
1 February 1985

DETAIL SPECIFICATION SHEET

LIGHT ASSEMBLY, PRESS TO TEST INDICATOR

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

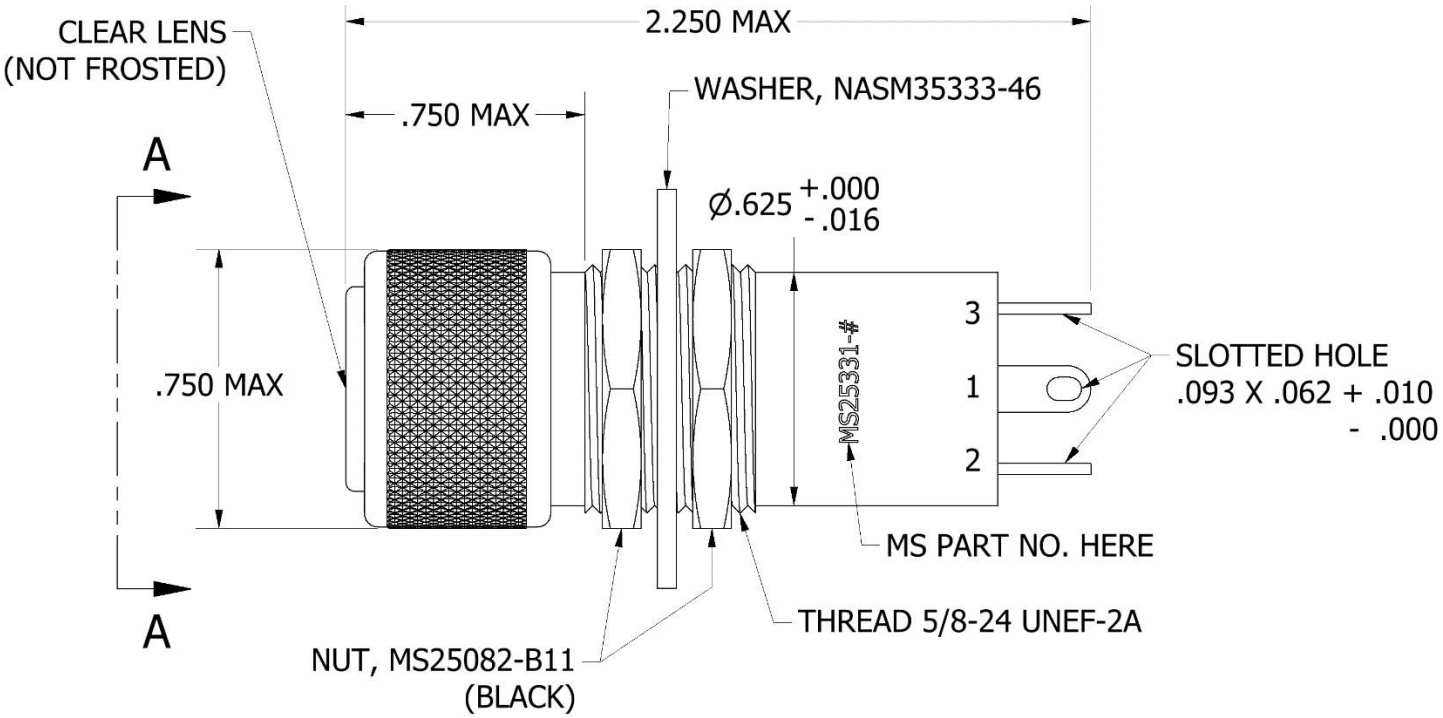



FIGURE 1. Design and Configuration

Comments, suggestions, or questions on this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

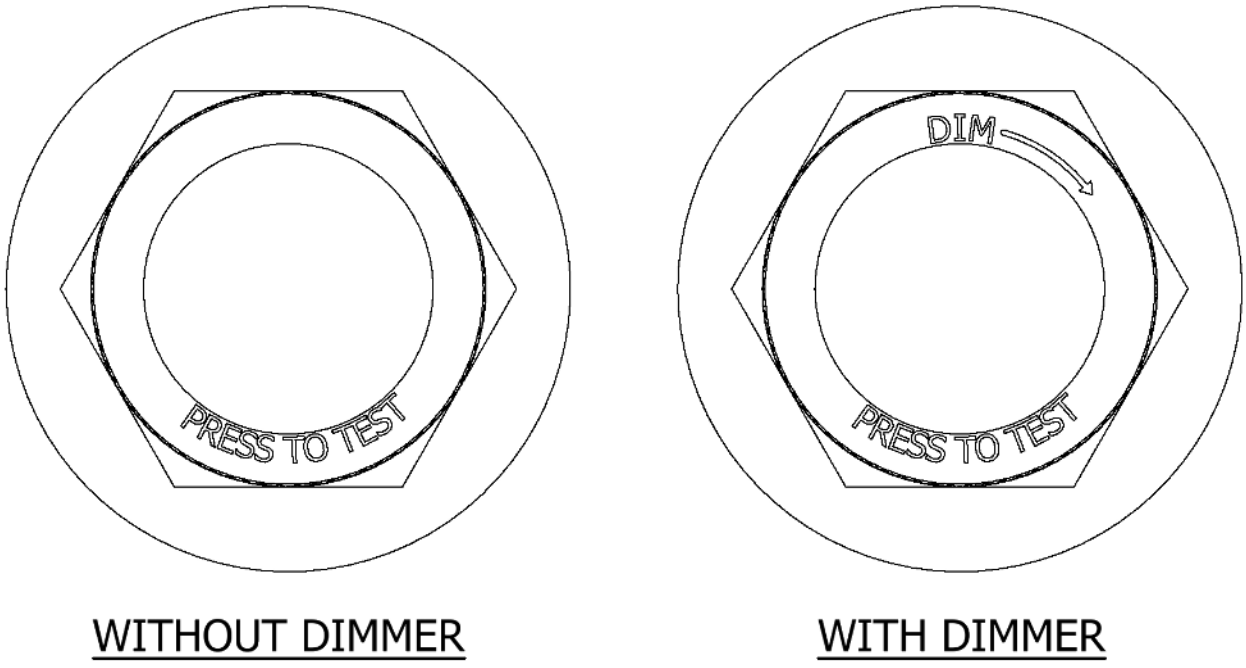

VIEW A-A

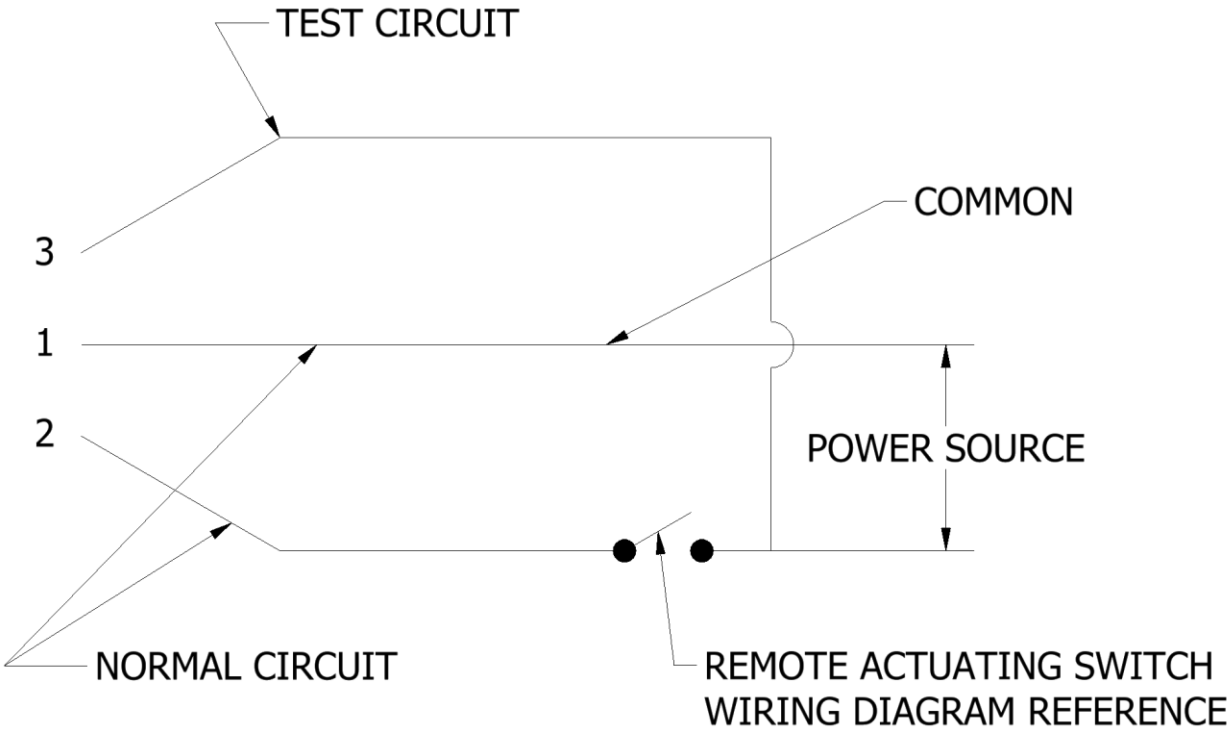


FIGURE 1. Design and Configuration – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

3D Model for reference only.

FIGURE 1. Design and Configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Number

With Dimmer Feature	Without Dimmer Feature	With Large Jewel	Color
-1	-5		Colorless
-2	-6	-9[1]	Red
-3	-7		Green
-4	-8		Yellow

[1] -9 inactive for new design after 3 April 1961

TABLE II. Lamp Reference

Part Number	Voltage (Volts)
MS25231-313S	28
MS25231-316S	6

NOTES:

1. Dimensions in inches.
2. The part number marked on the assembly shall be that for the complete assembly, without lamp.
3. The part number for the assembly with the lamp shall consist of the MS part number of the assembly with an additional dash number, which is the trade number of the lamp.

   Example: MS25331-2-313S

4. The part number for the assembly with the lamp shall be marked on the shipping container only.
5. MS25231 shall have an overall length not less than 1.088 inches to insure proper operation.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents will be of the issue in effect on the date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

Referenced documents. In addition to the procurement specification, MIL-DTL-7961, this document references the following:

MS25082
MS25231
NASM35333

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - AS
DLA - GS

Reviewers:
Army - AT, AV, CR4, MI

Preparing activity:
DLA – GS2

(Project 6210-2021-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.