[INCH−POUND]
A−A−59832/5C
15 July 2024
SUPERSEDING
A−A−59832/5B
5 May 2020


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD, METAL, NON−LOCKING, SINGLE−SIDED ACTUATION, NARROW PROFILE, ANGLED ACTUATING HANDLE, FOR .032, .063, .094, .125, AND .156 INCH THICK CIRCUIT CARD ASSEMBLIES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring extractors described herein shall consist of this document and the latest issue in effect of A−A−59832.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES herein).

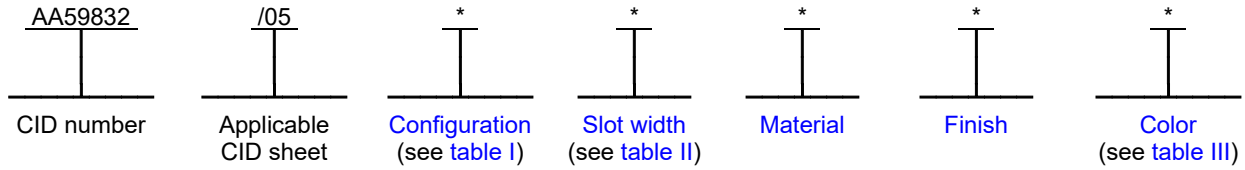

Example: AA59832/05K42LC is the PIN for a left handed, angle handle, aluminum extractor designed for mounting on a circuit card assembly with a printed board thickness of .125 inch (3.20 mm) in width. The corrosion protection finish applied to the extractor is clear low resistance chemical film.

SALIENT CHARACTERISTICS.

Performance. Extractors shall be capable of initiating the removal of a circuit card assembly from its installed position. The mechanical advantage of all extractor configurations on this CID specification sheet shall be a minimum of 4:1.

Interface and physical dimensions. The extractors supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A−A−59832.

Configuration. The configuration of an extractor shall be as specified in table I and on figures 1 through 6.

TABLE I. Configurations.

Configuration	Applicable figures	Extractor description
K	1 and 2	Left hand with SED symbol on the angled handle
L	1	Left hand with angled handle
M	3	Left hand with bent leg and angled handle
N	3 and 4	Left hand with bent leg and SED symbol on the angled handle
P	4 and 5	Right hand with bent leg and SED symbol on the angled handle
Q	5	Right hand with bent leg and angled handle
R	6	Right hand with angled handle
S	6 and 2	Right hand with SED symbol on the angled handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Slot width. The available slot widths needed to accommodate various printed board thicknesses for the extractors covered by this CID specification sheet are specified in table II. The slot width designator shall be included in the PIN.

TABLE II. Slot width configurations and dimensions. 1/

Slot width designator	Slot width dimension "A" 2/ Inch (mm)	Accommodates printed board thickness Inch (mm)	Roll pin width Inch (mm)	Handle width dimension "B" Inch (mm)
1	.040 (1.02)	.032 (0.8)	.187 (4.75)	.25 (6.4)
2	.075 (2.03)	.063 (1.6)	.187 (4.75)	
3	.105 (2.79)	.094 (2.4)	.250 (6.35)	
4	.142 (3.56)	.125 (3.2)	.250 (6.35)	.29 (7.4)
5	.165 (4.19)	.156 (4.0)	.312 (7.94)	

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.
2/ Tolerance is +.005, −.005 inch (+0.127, −0.127 mm).

Material. The material used in the extractor body shall be as specified in A−A−59832. The applicable material type designators for this CID specification sheet are "1" (aluminum alloy 6061, temper T6), "2" (aluminum alloy 5052, temper H32), or "7" (Stainless steel, types 301, 302 or 304). The material designator shall be included in the PIN.

Material thickness. The aluminum thickness shall be .063 ±.003 inch (1.60 ±.077 mm). The stainless steel thickness shall be .060 ±.003 inch (1.60 ±0.077 mm).

Roll pin. A stainless steel roll pin is furnished with each extractor. The roll pin is .09375 inch (2.38 mm) diameter by the widths specified in table II.


Finish. The finish designator shall be as specified in A−A−59832. The finishes available for this CID specification sheet are as follows: "A" (anodize), "D" (thick chemical film for maximum corrosion protection), "M" or "L" (thinner chemical film for improved electrical conductivity with corrosion protection, hereafter referred to as "low resistance chemical film") for extractors fabricated of aluminum alloys and "P" (passivation treatment) extractors fabricated of stainless steel.

Color. The color designator shall be as specified in A−A−59832. The colors available for this CID specification sheet shall be "C" (clear) or "G" (gold) for low resistance chemical film and "C" (clear) for passivation treatment. The color of anodized extractors shall be specified in table III. The color designator shall be included in the PIN.

TABLE III. Colors of anodized extractors.

Designator	Color	Designator	Color
B	Black	R	Red
C	Clear	U	Blue
D	Green	V	Violet (purple)
E	Gray	W	Brown
F	Orange	Y	Yellow

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

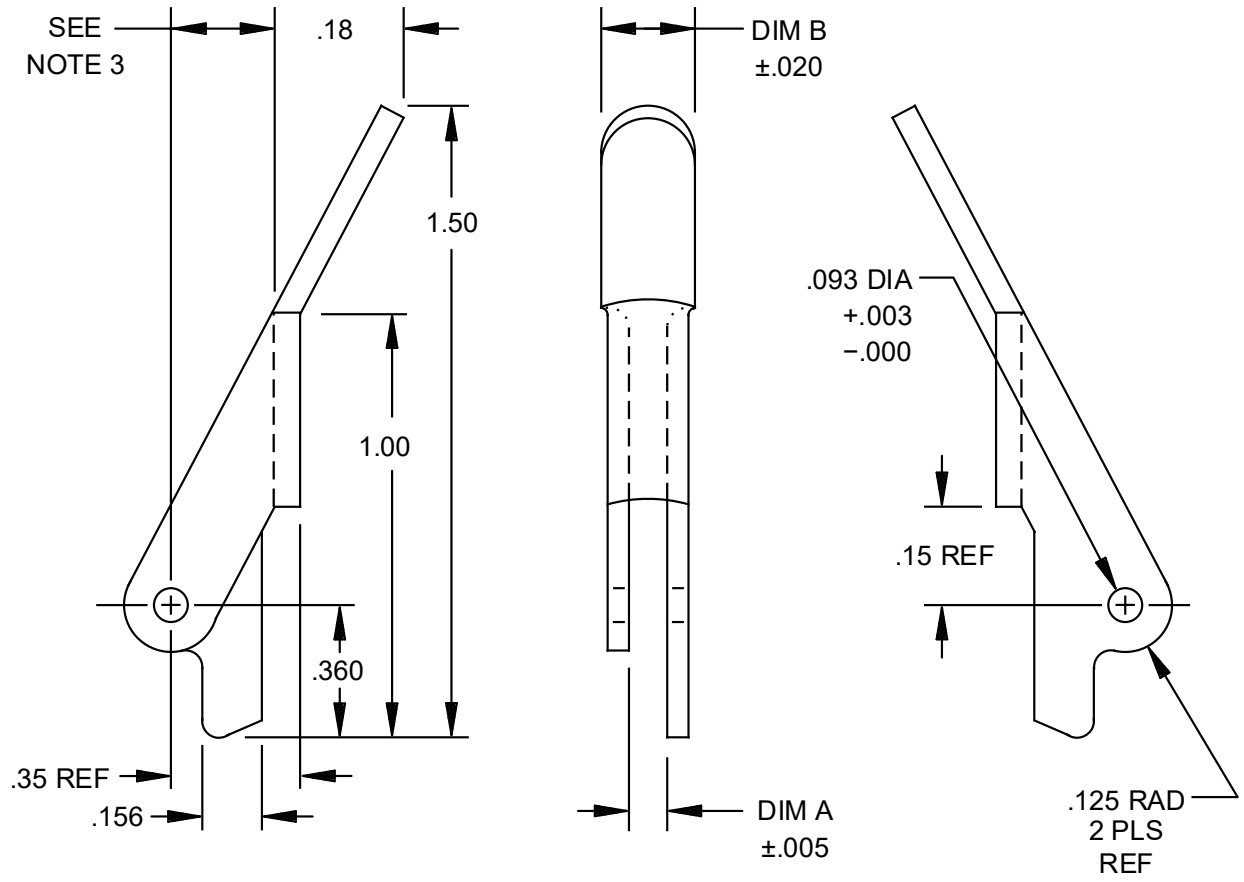


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.125	3.18	.156	3.96	.360	9.14
.005	0.13	.093	2.36	.140	3.56	.18	4.57	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 1. Configuration L dimensions (left hand).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

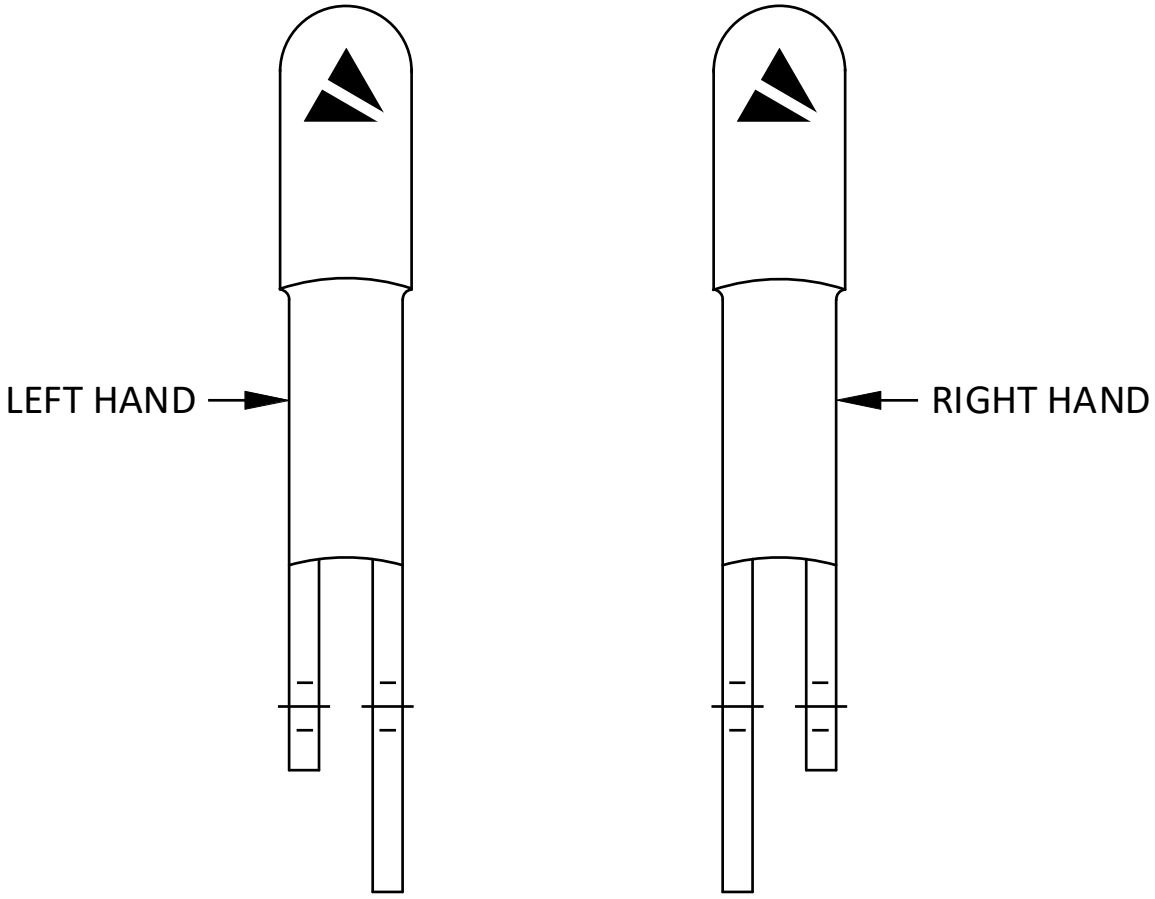

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A−A−59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A−A−59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 2. Configurations K and S with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

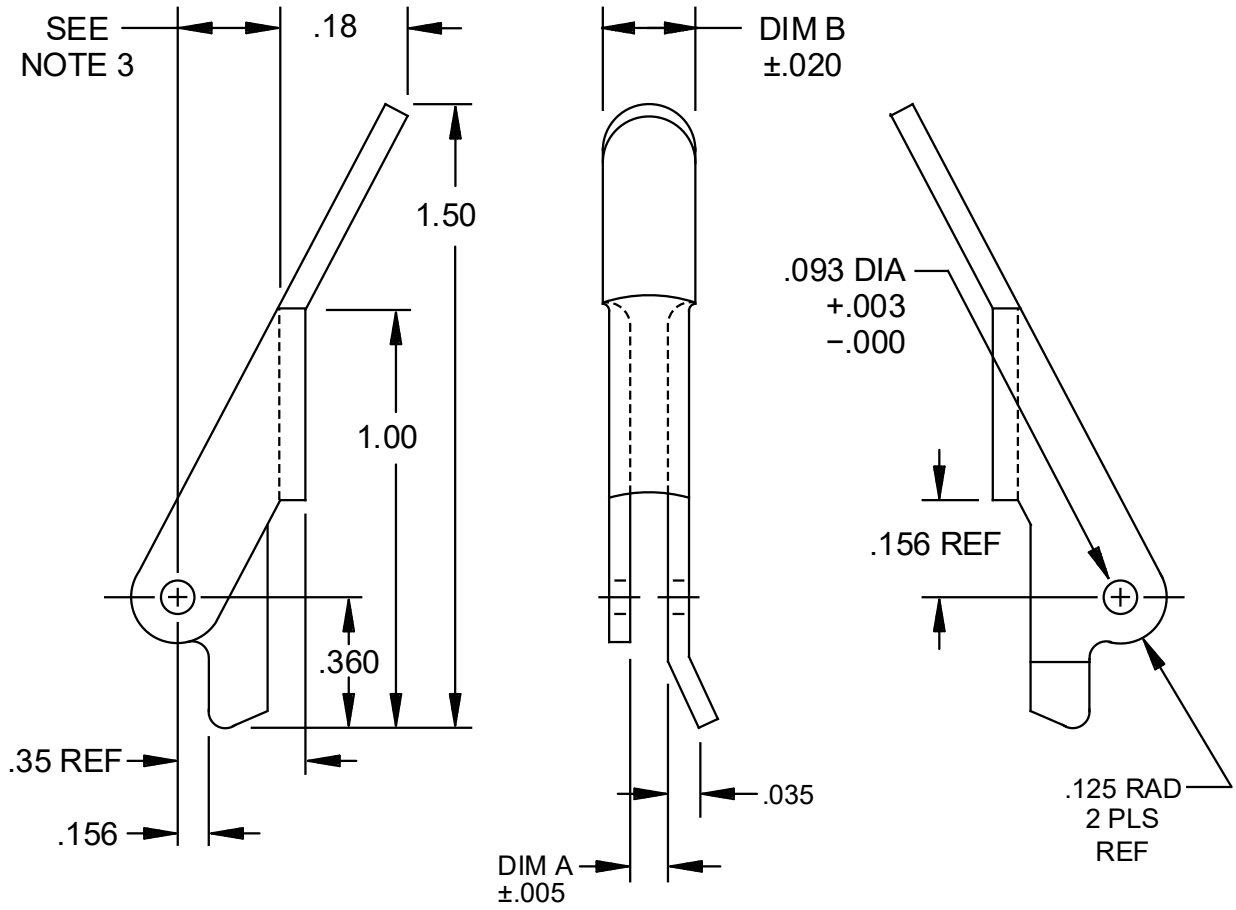


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.156	3.96	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.18	4.57	1.00	25.4
				.140	3.56	.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 3. Configuration M dimensions (left hand with bent leg).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

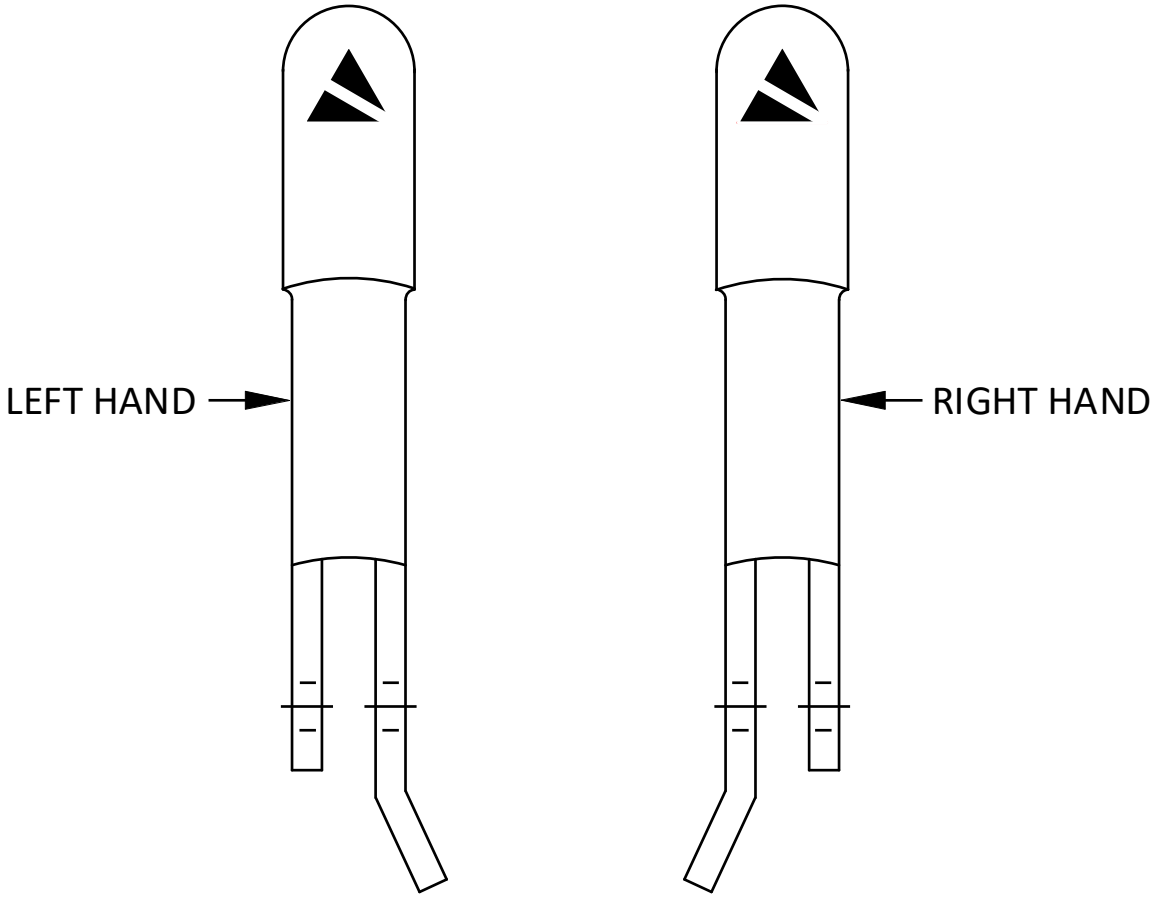

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A−A−59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A−A−59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 4. Configurations N and P with bent leg and SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

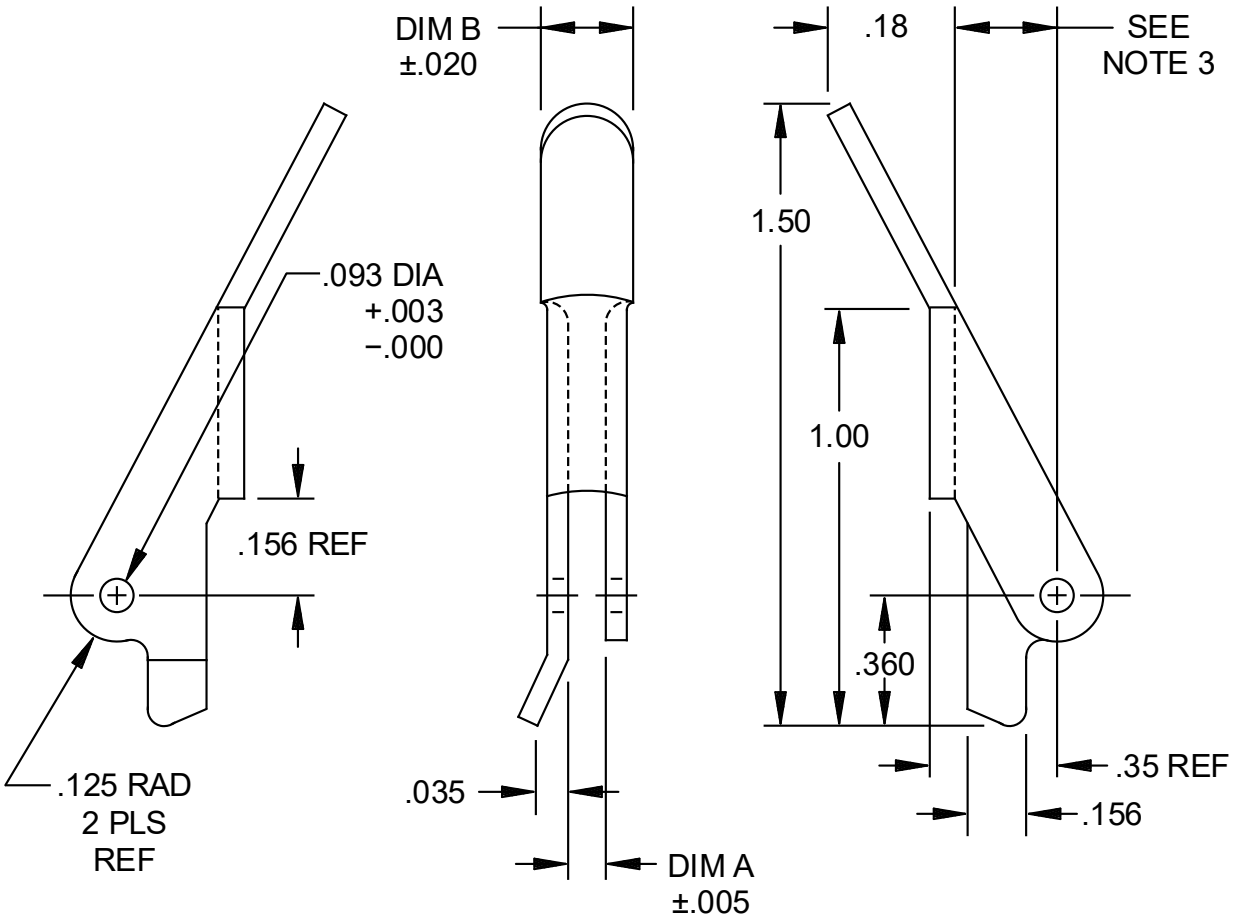


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.156	3.96	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.18	4.57	1.00	25.4
				.140	3.56	.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 5. Configuration Q dimensions (right hand with bent leg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

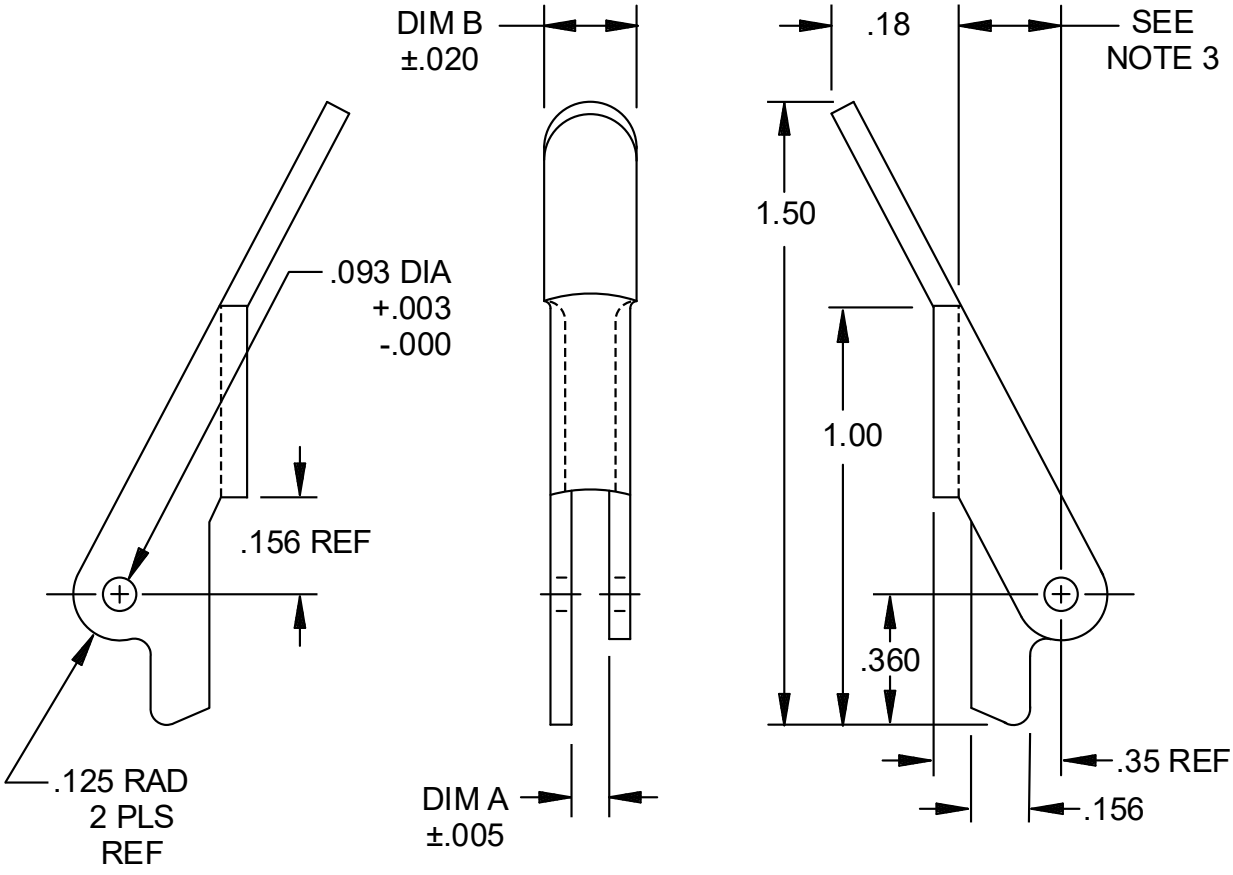

BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.125	3.18	.156	3.96	.360	9.14
.005	0.13	.093	2.36	.140	3.56	.18	4.57	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 6. Configuration R dimensions (right hand).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

APPLICATION DATA.

Extractor orientation with circuit card assembly printed board. Figures 7 and 8 show the extractor mounted to a circuit card assembly and installed into a locking card guide from different views. Figure 7 depicts one strait on and two angled views of a right hand extractor fastened to the printed board of a circuit card assembly. Figure 8 depicts a right side view of a circuit card assembly with a right hand extractor fastened to the printed board.

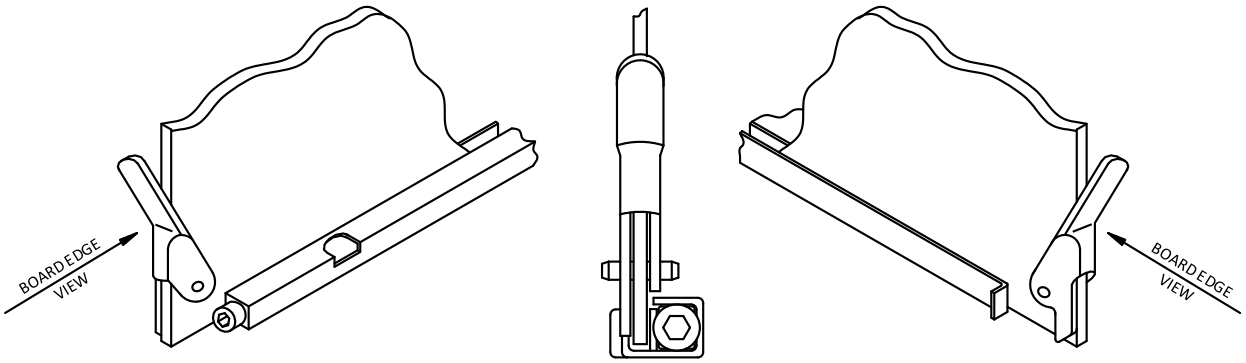


FIGURE 7. Extractor fastened to circuit card assembly (right hand extractor shown).


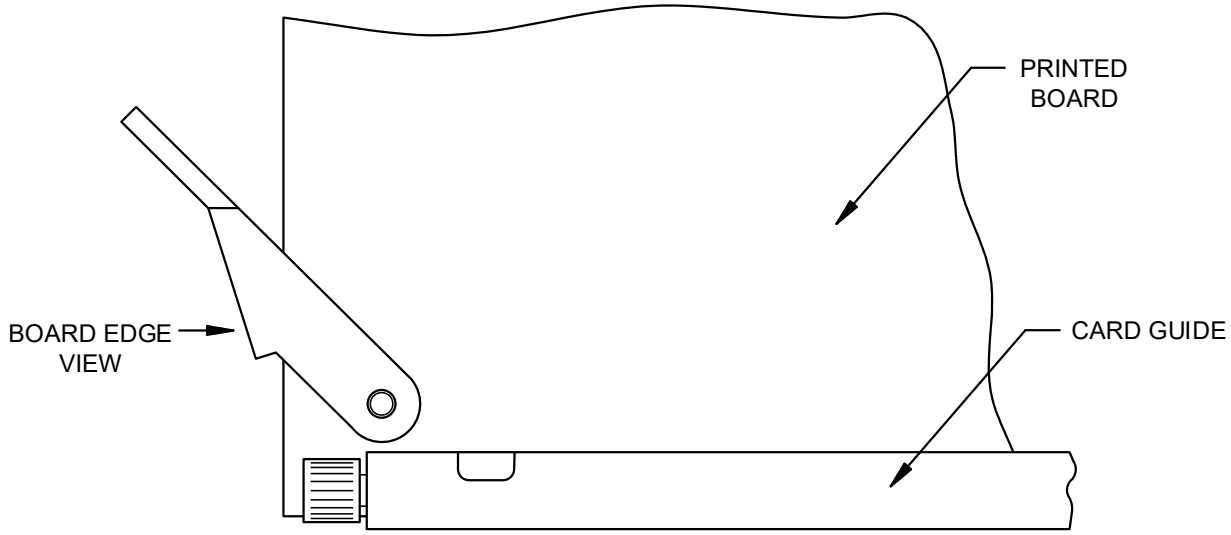


FIGURE 8. Circuit card assembly to card guide view (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Circuit card positioning in relation to actuating surface. Two positions of a circuit card assembly edge to a locking card guide when seated in the connector are shown on figure 9. The circuit card assembly is ejected from its installed position by lever action of the extractor against the tab on a locking card guide (shown) or actuating surface of a card cage. The extractor will allow .030 inch (0.8 mm) over travel for tolerance take-up. Two extractors mounted on each circuit card assembly is recommended.

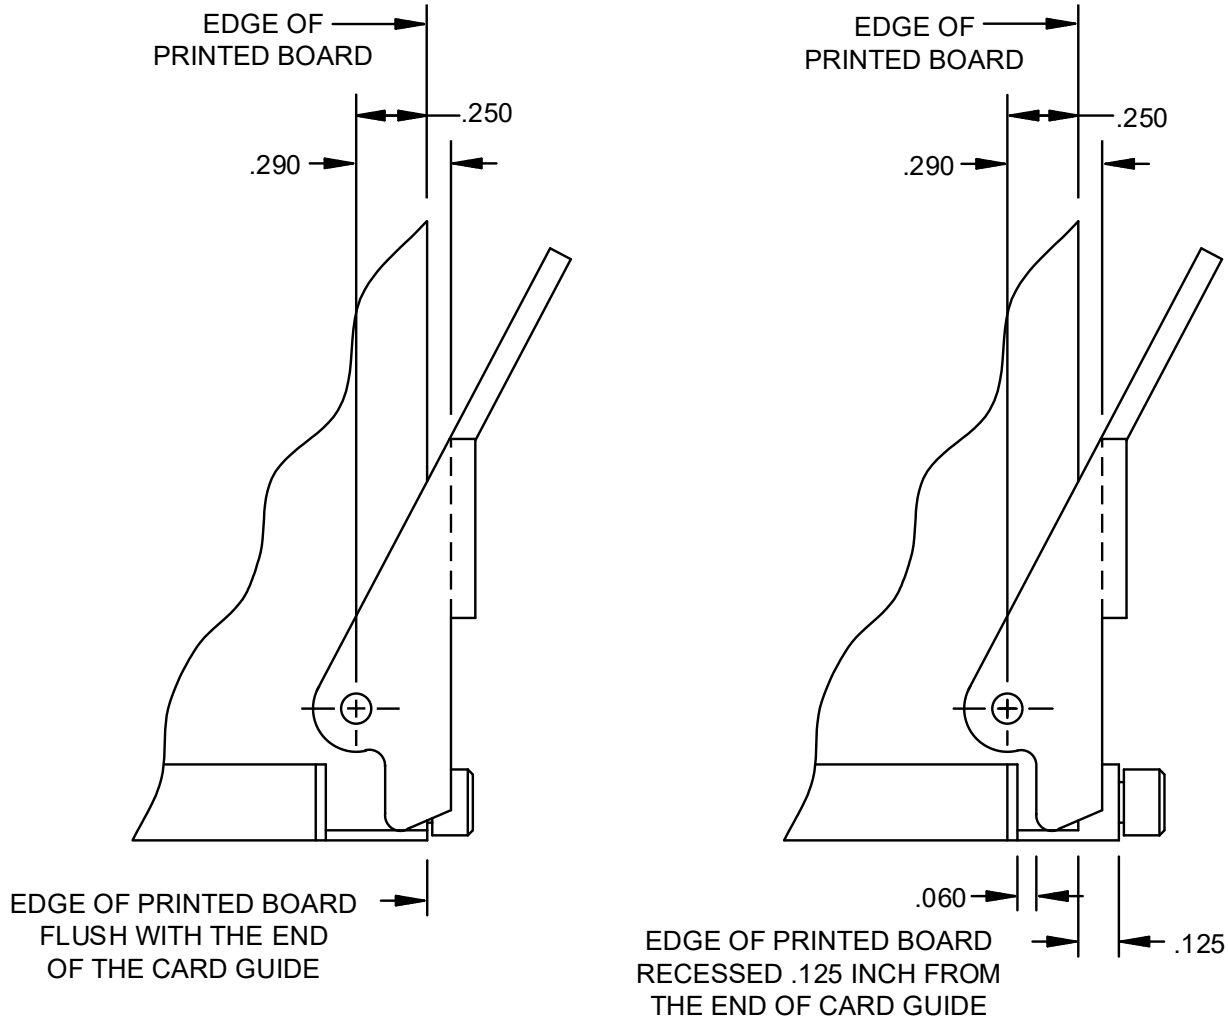


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.060	1.52	.125	3.18	.250	6.35	.290	7.37

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 9. Circuit card assembly to locking card guide dimensions (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Circuit card assembly printed board. The circuit card assembly should be designed so that electronic components on the printed board in the area around the extractor mounting hole have sufficient clearance for extractor rotation as shown on figure 10.

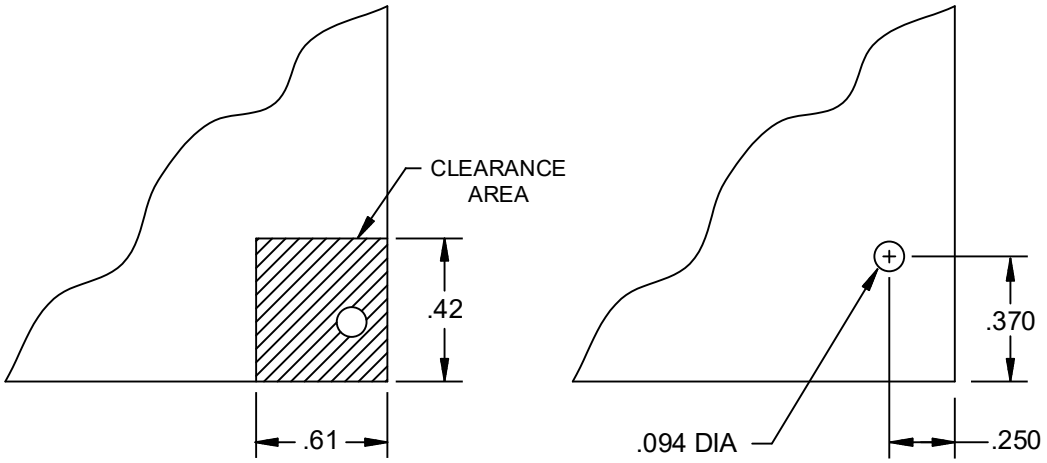

ELECTRONIC COMPONENT CLEARANCE ZONE REQUIRED TO ACCOMODATE MOUNTING AND ROTATION OF EXTRACTOR (LEG SIDE SHOWN)

PRINTED BOARD MOUNTING DIMENSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.39	.250	6.35	.370	9.40	.42	10.67	.61	15.49

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 10. Printed board clearance zone and mounting hole dimensions.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A-A-59832 - Extractor, Electrical Card, Metal, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Ordering data. Ordering data is as specified in A-A-59832.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806-1231	Telephone: (714) 738-6194 Facsimile: (714) 446-0119 E-mail: sales@accrmfg.com URL: https://www.accrmfg.com
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121-3410	Telephone: (800) 854-7086 Facsimile: (858) 740-2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in tables IV, V, and VI. This CID specification sheet PINs also supersedes those DESC Drawing 84191 PINs as shown in table VII. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
K11AR 3/	1119A-1LRAE	71T6–1-L-1-E	
K21AR 3/	1119A-2LRAE	71T6-2-L-1-E	
K31AR 3/	1119A-3LRAE	71T6-3-L-1-E	
K41AR 3/	1119A-4LRAE	71T6-4-L-1-E	
K51AR 3/	1119A-5LRAE	71T6-5-L-1-E	
K11DG 4/	1119A-1LCGE	71T6-1-L-E	
K21DG 4/	1119A-2LCGE	71T6-2-L-E	
K31DG 4/	1119A-3LCGE	71T6-3-L-E	
K41DG 4/	1119A-4LCGE	71T6-4-L-E	
K51DG 4/	1119A-5LCGE	71T6-5-L-E	
L11AR 3/	1119A-1LRA	71T6-1-L-1	
L21AR 3/	1119A-2LRA	71T6-2-L-1	
L31AR 3/	1119A-3LRA	71T6-3-L-1	
L41AR 3/	1119A-4LRA	71T6-4-L-1	
L51AR 3/	1119A-5LRA	71T6-5-L-1	
L11DG 4/	1119A-1LCG	71T6-1-L	
L21DG 4/	1119A-2LCG	71T6-2-L	
L31DG 4/	1119A-3LCG	71T6-3-L	
L41DG 4/	1119A-4LCG	71T6-4-L	
L51DG 4/	1119A-5LCG	71T6-5-L	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors − Continued.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
M11AR 3/	1119A−1LRAD	71T6−1−L−1−BL	
M21AR 3/	1119A−2LRAD	71T6−2−L−1−BL	
M31AR 3/	1119A−3LRAD	71T6−3−L−1−BL	
M41AR 3/	1119A−4LRAD	71T6−4−L−1−BL	
M51AR 3/	1119A−5LRAD	71T6−5−L−1−BL	
M11DG 4/	1119A−1LCGD	71T6−1−L−BL	
M21DG 4/	1119A−2LCGD	71T6−2−L−BL	
M31DG 4/	1119A−3LCGD	71T6−3−L−BL	
M41DG 4/	1119A−4LCGD	71T6−4−L−BL	
M51DG 4/	1119A−5LCGD	71T6−5−L−BL	
N11AR 3/	1119A−1LRADE	71T6−1−L−1−BL−E	
N21AR 3/	1119A−2LRADE	71T6−2−L−1−BL−E	
N31AR 3/	1119A−3LRADE	71T6−3−L−1−BL−E	
N41AR 3/	1119A−4LRADE	71T6−4−L−1−BL−E	
N51AR 3/	1119A−5LRADE	71T6−5−L−1−BL−E	
N11DG 4/	1119A−1LCGDE	71T6−1−L−BL−E	
N21DG 4/	1119A−2LCGDE	71T6−2−L−BL−E	
N31DG 4/	1119A−3LCGDE	71T6−3−L−BL−E	
N41DG 4/	1119A−4LCGDE	71T6−4−L−BL−E	
N51DG 4/	1119A−5LCGDE	71T6−5−L−BL−E	
P11AR 3/	1119A−1RRADE	71T6−1−R−1−BL−E	
P21AR 3/	1119A−2RRADE	71T6−2−R−1−BL−E	
P31AR 3/	1119A−3RRADE	71T6−3−R−1−BL−E	
P41AR 3/	1119A−4RRADE	71T6−4−R−1−BL−E	
P51AR 3/	1119A−5RRADE	71T6−5−R−1−BL−E	
P11DG 4/	1119A−1RCGDE	71T6−1−R−BL−E	
P21DG 4/	1119A−2RCGDE	71T6−2−R−BL−E	
P31DG 4/	1119A−3RCGDE	71T6−3−R−BL−E	
P41DG 4/	1119A−4RCGDE	71T6−4−R−BL−E	
P51DG 4/	1119A−5RCGDE	71T6−5−R−BL−E	
Q11AR 3/	1119A−1RRAD	71T6−1−R−1−BL	
Q21AR 3/	1119A−2RRAD	71T6−2−R−1−BL	
Q31AR 3/	1119A−3RRAD	71T6−3−R−1−BL	
Q41AR 3/	1119A−4RRAD	71T6−4−R−1−BL	
Q51AR 3/	1119A−5RRAD	71T6−5−R−1−BL	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors - Continued.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
Q11DG 4/	1119A-1RCGD	71T6-1-R-BL	
Q21DG 4/	1119A-2RCGD	71T6-2-R-BL	
Q31DG 4/	1119A-3RCGD	71T6-3-R-BL	
Q41DG 4/	1119A-4RCGD	71T6-4-R-BL	
Q51DG 4/	1119A-5RCGD	71T6-5-R-BL	
R11AR 3/	1119A-1RRA	71T6-1-R-1	
R21AR 3/	1119A-2RRA	71T6-2-R-1	
R31AR 3/	1119A-3RRA	71T6-3-R-1	
R41AR 3/	1119A-4RRA	71T6-4-R-1	
R51AR 3/	1119A-5RRA	71T6-5-R-1	
R11DG 4/	1119A-1RCG	71T6-1-R	
R21DG 4/	1119A-2RCG	71T6-2-R	
R31DG 4/	1119A-3RCG	71T6-3-R	
R41DG 4/	1119A-4RCG	71T6-4-R	
R51DG 4/	1119A-5RCG	71T6-5-R	
S11AR 3/	1119A-1RRAE	71T6-1-R-1-E	
S21AR 3/	1119A-2RRAE	71T6-2-R-1-E	
S31AR 3/	1119A-3RRAE	71T6-3-R-1-E	
S41AR 3/	1119A-4RRAE	71T6-4-R-1-E	
S51AR 3/	1119A-5RRAE	71T6-5-R-1-E	
S11DG 4/	1119A-1RCGE	71T6-1-R-E	
S21DG 4/	1119A-2RCGE	71T6-2-R-E	
S31DG 4/	1119A-3RCGE	71T6-3-R-E	
S41DG 4/	1119A-4RCGE	71T6-4-R-E	
S51DG 4/	1119A-5RCGE	71T6-5-R-E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The finish and color designators for the PINs listed are either for red anodize (CID finish and color codes AR) or gold maximum corrosion protection (thick) chemical film (CID finish and color codes DG).

3/ See table III for the finish color designators for the other 9 anodize colors available.

4/ Low resistance chemical film finishes are also available in clear (CID finish and color codes LC) and gold (CID finish and color codes MG).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
K12AB 3/	1109A-1LBAE	71-1-L-5-E	
K22AB 3/	1109A-2LBAE	71-2-L-5-E	
K32AB 3/	1109A-3LBAE	71-3-L-5-E	
K42AB 3/	1109A-4LBAE	71-4-L-5-E	
K52AB 3/	1109A-5LBAE	71-5-L-5-E	
K12LC 4/	1109A-1LCCE	71-1-L-CC3-E	
K22LC 4/	1109A-2LCCE	71-2-L-CC3-E	
K32LC 4/	1109A-3LCCE	71-3-L-CC3-E	
K42LC 4/	1109A-4LCCE	71-4-L-CC3-E	
K52LC 4/	1109A-5LCCE	71-5-L-CC3-E	
L12AB 3/	1109A-1LBA	71-1-L-5	
L22AB 3/	1109A-2LBA	71-2-L-5	
L32AB 3/	1109A-3LBA	71-3-L-5	
L42AB 3/	1109A-4LBA	71-4-L-5	
L52AB 3/	1109A-5LBA	71-5-L-5	
L12LC 4/	1109A-1LCC	71-1-L-CC3	
L22LC 4/	1109A-2LCC	71-2-L-CC3	
L32LC 4/	1109A-3LCC	71-3-L-CC3	
L42LC 4/	1109A-4LCC	71-4-L-CC3	
L52LC 4/	1109A-5LCC	71-5-L-CC3	
M12AB 3/	1109A-1LBAD	71-1-L-5-BL	
M22AB 3/	1109A-2LBAD	71-2-L-5-BL	
M32AB 3/	1109A-3LBAD	71-3-L-5-BL	
M42AB 3/	1109A-4LBAD	71-4-L-5-BL	
M52AB 3/	1109A-5LBAD	71-5-L-5-BL	
M12LC 4/	1109A-1LCCD	71-1-L-CC3-BL	
M22LC 4/	1109A-2LCCD	71-2-L-CC3-BL	
M32LC 4/	1109A-3LCCD	71-3-L-CC3-BL	
M42LC 4/	1109A-4LCCD	71-4-L-CC3-BL	
M52LC 4/	1109A-5LCCD	71-5-L-CC3-BL	
N12AB 3/	1109A-1LBADE	71-1-L-5-BL-E	
N22AB 3/	1109A-2LBADE	71-2-L-5-BL-E	
N32AB 3/	1109A-3LBADE	71-3-L-5-BL-E	
N42AB 3/	1109A-4LBADE	71-4-L-5-BL-E	
N52AB 3/	1109A-5LBADE	71-5-L-5-BL-E	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors - Continued.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
N12LC 4/	1109A-1LCCDE	71-1-L-CC3-BL-E	
N22LC 4/	1109A-2LCCDE	71-2-L-CC3-BL-E	
N32LC 4/	1109A-3LCCDE	71-3-L-CC3-BL-E	
N42LC 4/	1109A-4LCCDE	71-4-L-CC3-BL-E	
N52LC 4/	1109A-5LCCDE	71-5-L-CC3-BL-E	
P12AB 3/	1109A-1RBADE	71-1-R-5-BL-E	
P22AB 3/	1109A-2RBADE	71-2-R-5-BL-E	
P32AB 3/	1109A-3RBADE	71-3-R-5-BL-E	
P42AB 3/	1109A-4RBADE	71-4-R-5-BL-E	
P52AB 3/	1109A-5RBADE	71-5-R-5-BL-E	
P12LC 4/	1109A-1RCCDE	71-1-R-CC3-BL-E	
P22LC 4/	1109A-2RCCDE	71-2-R-CC3-BL-E	
P32LC 4/	1109A-3RCCDE	71-3-R-CC3-BL-E	
P42LC 4/	1109A-4RCCDE	71-4-R-CC3-BL-E	
P52LC 4/	1109A-5RCCDE	71-5-R-CC3-BL-E	
Q12AB 3/	1109A-1RBAD	71-1-R-5-BL	
Q22AB 3/	1109A-2RBAD	71-2-R-5-BL	
Q32AB 3/	1109A-3RBAD	71-3-R-5-BL	
Q42AB 3/	1109A-4RBAD	71-4-R-5-BL	
Q52AB 3/	1109A-5RBAD	71-5-R-5-BL	
Q12LC 4/	1109A-1RCCD	71-1-R-CC3-BL	
Q22LC 4/	1109A-2RCCD	71-2-R-CC3-BL	
Q32LC 4/	1109A-3RCCD	71-3-R-CC3-BL	
Q42LC 4/	1109A-4RCCD	71-4-R-CC3-BL	
Q52LC 4/	1109A-5RCCD	71-5-R-CC3-BL	
R12AB 3/	1109A-1RBA	71-1-R-5	
R22AB 3/	1109A-2RBA	71-2-R-5	
R32AB 3/	1109A-3RBA	71-3-R-5	
R42AB 3/	1109A-4RBA	71-4-R-5	
R52AB 3/	1109A-5RBA	71-5-R-5	
R12LC 4/	1109A-1RCC	71-1-R-CC3	
R22LC 4/	1109A-2RCC	71-2-R-CC3	
R32LC 4/	1109A-3RCC	71-3-R-CC3	
R42LC 4/	1109A-4RCC	71-4-R-CC3	
R52LC 4/	1109A-5RCC	71-5-R-CC3	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors - Continued.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
S12AB 3/	1109A-1RBAE	71-1-R-5-E	
S22AB 3/	1109A-2RBAE	71-2-R-5-E	
S32AB 3/	1109A-3RBAE	71-3-R-5-E	
S42AB 3/	1109A-4RBAE	71-4-R-5-E	
S52AB 3/	1109A-5RBAE	71-5-R-5-E	
S12LC 4/	1109A-1RCCE	71-1-R-CC3-E	
S22LC 4/	1109A-2RCCE	71-2-R-CC3-E	
S32LC 4/	1109A-3RCCE	71-3-R-CC3-E	
S42LC 4/	1109A-4RCCE	71-4-R-CC3-E	
S52LC 4/	1109A-5RCCE	71-5-R-CC3-E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.
2/ The finish and color designators for the PINs listed are either for clear low resistance chemical film (CID finish and color codes LC) or black anodize (CID finish and color codes AB).
3/ See table III for the color designators for the other 9 anodize colors available.
4/ Maximum corrosion protection (thick) chemical film is also available in gold (CID finish codes DG).

TABLE VI. Commercial part number supersession data for stainless steel extractors.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE	CAGE
K27PC	1129A-2LE		
K37PC	1129A-3LE		
K47PC	1129A-4LE		
K57PC	1129A-5LE		
L27PC	1129A-2L		
L37PC	1129A-3L		
L47PC	1129A-4L		
L57PC	1129A-5L		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE VI. Commercial part number supersession data for stainless steel extractors - Continued.

PIN designator AA59832/05	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE	CAGE
M27PC	1129A-2LD		
M37PC	1129A-3LD		
M47PC	1129A-4LD		
M57PC	1129A-5LD		
N27PC	1129A-2LDE		
N37PC	1129A-3LDE		
N47PC	1129A-4LDE		
N57PC	1129A-5LDE		
P27PC	1129A-2RDE		
P37PC	1129A-3RDE		
P47PC	1129A-4RDE		
P57PC	1129A-5RDE		
Q27PC	1129A-2RD		
Q37PC	1129A-3RD		
Q47PC	1129A-4RD		
Q57PC	1129A-5RD		
R27PC	1129A-2R		
R37PC	1129A-3R		
R47PC	1129A-4R		
R57PC	1129A-5R		
S27PC	1129A-2RE		
S37PC	1129A-3RE		
S47PC	1129A-4RE		
S57PC	1129A-5RE		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The PINs listed are for passivation treatment (CID finish and color codes PC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191-01ET	AA59832/05K11DG	84191-02ET	AA59832/05S11DG
84191-01EA	AA59832/05K12DG	84191-02EA	AA59832/05S12DG
84191-01PS	AA59832/05L17PC	84191-02PS	AA59832/05R17PC
84191-01CT	AA59832/05L11DG	84191-02CT	AA59832/05R11DG
84191-01CA	AA59832/05L12DG	84191-02CA	AA59832/05R12DG
84191-01*T 1/	AA59832/05L11A# 2/	84191-02*T 1/	AA59832/05R11A# 2/
84191-01*A 1/	AA59832/05L12A# 2/	84191-02*A 1/	AA59832/05R12A# 2/
84191-01CTBL	AA59832/05M11DG	84191-02CTBL	AA59832/05Q11DG
84191-01CABL	AA59832/05M12DG	84191-02CABL	AA59832/05Q12DG
84191-01*TBL 1/	AA59832/05M11A# 2/	84191-02*TBL 1/	AA59832/05Q11A# 2/
84191-01*ABL 1/	AA59832/05M12A# 2/	84191-02*ABL 1/	AA59832/05Q12A# 2/
84191-01PSBL	AA59832/05M17PC	84191-02PSBL	AA59832/05Q17PC
84191-01ETBL	AA59832/05N11DG	84191-02ETBL	AA59832/05P11DG
84191-01EABL	AA59832/05N12DG	84191-02EABL	AA59832/05P12DG
84191-03ET	AA59832/05K21DG	84191-04ET	AA59832/05S21DG
84191-03EA	AA59832/05K22DG	84191-04EA	AA59832/05S22DG
84191-03PS	AA59832/05L27PC	84191-04PS	AA59832/05R27PC
84191-03CT	AA59832/05L21DG	84191-04CT	AA59832/05R21DG
84191-03CA	AA59832/05L22DG	84191-04CA	AA59832/05R22DG
84191-03*T 1/	AA59832/05L21A# 2/	84191-04*T 1/	AA59832/05R21A# 2/
84191-03*A 1/	AA59832/05L22A# 2/	84191-04*A 1/	AA59832/05R22A# 2/
84191-03CTBL	AA59832/05M21DG	84191-04CTBL	AA59832/05Q21DG
84191-03CABL	AA59832/05M22DG	84191-04CABL	AA59832/05Q22DG
84191-03*TBL 1/	AA59832/05M21A# 2/	84191-04*TBL 1/	AA59832/05Q21A# 2/
84191-03*ABL 1/	AA59832/05M22A# 2/	84191-04*ABL 1/	AA59832/05Q22A# 2/
84191-03PSBL	AA59832/05M27PC	84191-04PSBL	AA59832/05Q27PC
84191-03ETBL	AA59832/05N21DG	84191-04ETBL	AA59832/05P21DG
84191-03EABL	AA59832/05N22DG	84191-04EABL	AA59832/05P22DG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information - Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191-05ET	AA59832/05K31DG	84191-06ET	AA59832/05S31DG
84191-05EA	AA59832/05K32DG	84191-06EA	AA59832/05S32DG
84191-05PS	AA59832/05L37PC	84191-06PS	AA59832/05R37PC
84191-05CT	AA59832/05L31DG	84191-06CT	AA59832/05R31DG
84191-05CA	AA59832/05L32DG	84191-06CA	AA59832/05R32DG
84191-05*T 1/	AA59832/05L31A# 2/	84191-06*T 1/	AA59832/05R31A# 2/
84191-05*A 1/	AA59832/05L32A# 2/	84191-06*A 1/	AA59832/05R32A# 2/
84191-05CTBL	AA59832/05M31DG	84191-06CTBL	AA59832/05Q31DG
84191-05CABL	AA59832/05M32DG	84191-06CABL	AA59832/05Q32DG
84191-05*TBL 1/	AA59832/05M31A# 2/	84191-06*TBL 1/	AA59832/05Q31A# 2/
84191-05*ABL 1/	AA59832/05M32A# 2/	84191-06*ABL 1/	AA59832/05Q32A# 2/
84191-05PSBL	AA59832/05M37PC	84191-06PSBL	AA59832/05Q37PC
84191-05ETBL	AA59832/05N31DG	84191-06ETBL	AA59832/05P31DG
84191-05EABL	AA59832/05N32DG	84191-06EABL	AA59832/05P32DG
84191-07ET	AA59832/05K41DG	84191-08ET	AA59832/05S41DG
84191-07EA	AA59832/05K42DG	84191-08EA	AA59832/05S42DG
84191-07PS	AA59832/05L47PC	84191-08PS	AA59832/05R47PC
84191-07CT	AA59832/05L41DG	84191-08CT	AA59832/05R41DG
84191-07CA	AA59832/05L42DG	84191-08CA	AA59832/05R42DG
84191-07*T 1/	AA59832/05L41A# 2/	84191-08*T 1/	AA59832/05R41A# 2/
84191-07*A 1/	AA59832/05L42A# 2/	84191-08*A 1/	AA59832/05R42A# 2/
84191-07CTBL	AA59832/05M41DG	84191-08TBL	AA59832/05Q41DG
84191-07CABL	AA59832/05M42DG	84191-08CABL	AA59832/05Q42DG
84191-07*TBL 1/	AA59832/05M41A# 2/	84191-08*TBL 1/	AA59832/05Q41A# 2/
84191-07*ABL 1/	AA59832/05M42A# 2/	84191-08*ABL 1/	AA59832/05Q42A# 2/
84191-07PSBL	AA59832/05M47PC	84191-08PSBL	AA59832/05Q47PC
84191-07ETBL	AA59832/05N41DG	84191-08ETBL	AA59832/05P41DG
84191-07EABL	AA59832/05N42DG	84191-08EABL	AA59832/05P42DG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information − Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191−33ET	AA59832/05K51DG	84191−34ET	AA59832/05S51DG
84191−33EA	AA59832/05K52DG	84191−34EA	AA59832/05S52DG
84191−33PS	AA59832/05L57PC	84191−34PS	AA59832/05R57PC
84191−33CT	AA59832/05L51DG	84191−34CT	AA59832/05R51DG
84191−33CA	AA59832/05L52DG	84191−34CA	AA59832/05R52DG
84191−33*T 1/	AA59832/05L51A# 2/	84191−34*T 1/	AA59832/05R51A# 2/
84191−33*A 1/	AA59832/05L52A# 2/	84191−34*A 1/	AA59832/05R52A# 2/
84191−33CTBL	AA59832/05M51DG	84191−34CTBL	AA59832/05Q51DG
84191−33CABL	AA59832/05M52DG	84191−34CABL	AA59832/05Q52DG
84191−33*TBL 1/	AA59832/05M51A# 2/	84191−34*TBL 1/	AA59832/05Q51A# 2/
84191−33*ABL 1/	AA59832/05M52A# 2/	84191−34*ABL 1/	AA59832/05Q52A# 2/
84191−33PSBL	AA59832/05M57PC	84191−34PSBL	AA59832/05Q57PC
84191−33ETBL	AA59832/05N51DG	84191−34ETBL	AA59832/05P51DG
84191−33EABL	AA59832/05N52DG	84191−34EABL	AA59832/05P52DG

1/ The asterisk "*" denotes the anodize aluminum finish colors for DESC Drawing 84191.
2/ The pound-sign "#" denotes the anodize aluminum finish colors of table III herein.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity:
DLA − CC

Project: 5998−2024−010

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.