METRIC

DOD-B-24200B(SH)
AMENDMENT 2
18 March 1986
SUPERSEDING
AMENDMENT 1
22 January 1979

MILITARY SPECIFICATION

BATTERY CELLS AND ELEMENTS, LEAD-ACID,
LEAD-ANTIMONY, MAIN STORAGE, SUBMARINE;
GENERAL SPECIFICATION FOR (METRIC)

This amendment forms a part of DOD-B-24200B(SH), dated 23 October 1978, and is approved for use within the Naval Sea Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* Beneficial comments statement at bottom of page, line 3: Delete "Naval Ship Engineering Center, SEC 6124" and substitute "Naval Sea Systems Command, SEA 55Z3."

PAGE 3

* 3.1: Delete and substitute:

"3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.5)."

3.3.3.1, first sentence: Add "and figure 1."

PAGE 8

* 4.2: Delete and substitute:

"4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.5)."

* 4.3: Delete and substitute:

"4.3 First article inspection. First article inspection shall consist of the examination specified in 4.4 and the tests specified in 4.3.3 through 4.3.5."

AMSC N/A FSC 6140
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 20261O-19T19:55Z
Check the source to verify that this is the current version before use.

* 4.3.2: Delete and substitute:

"4.3.2 First article samples. Four sample cells in the "uncharged and dry" condition of each type for which first article is desired shall be submitted. One sample shall be subjected to the high-impact shock test of 4.3.3 and three samples shall be subjected to the life test of 4.3.4 and the terminal resistance of 4.3.5. First article shall include all classes covered by the applicable specification sheet."

PAGE 10

4.3.5, lines 2 and 3: Delete "the procedure of NAVSEA S9086-G1-STM-010/CH-223 V1" and substitute "figure 1"."

PAGE 13

* 6.2.1: Delete and substitute:

"6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification and applicable specification sheet.
(b) Type and class required (see 1.2).
(c) First article inspection, if required (see 3.1).
(d) Cell jar material if other than as specified (see 3.4.3).
(e) Number of sets of cells or elements (see 3.6.1).
(f) Number of spare cells or elements (see 3.6.2).
(g) Repair parts and tools required (see 3.6.4):
  (1) Onboard.
  (2) Installation.
(h) If engineering services are required (see 3.7).
(i) Quality assurance requirements (see 4.1.1).
(j) Whether sample cells are required (see 4.5).
(k) Level of packing required for bulk manuals (see 5.3.5).
(l) When packaging technical data is required (see 5.5)."

PAGE 15

* 6.5 and 6.5.1: Delete and substitute:

"6.5 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of four units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:55Z
Check the source to verify that this is the current version before use.


PAGES 17 and 18

Add as new pages, figures 1 and 2.

NOTE: The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH
(Project 6140-N621)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:55Z
Check the source to verify that this is the current version before use.

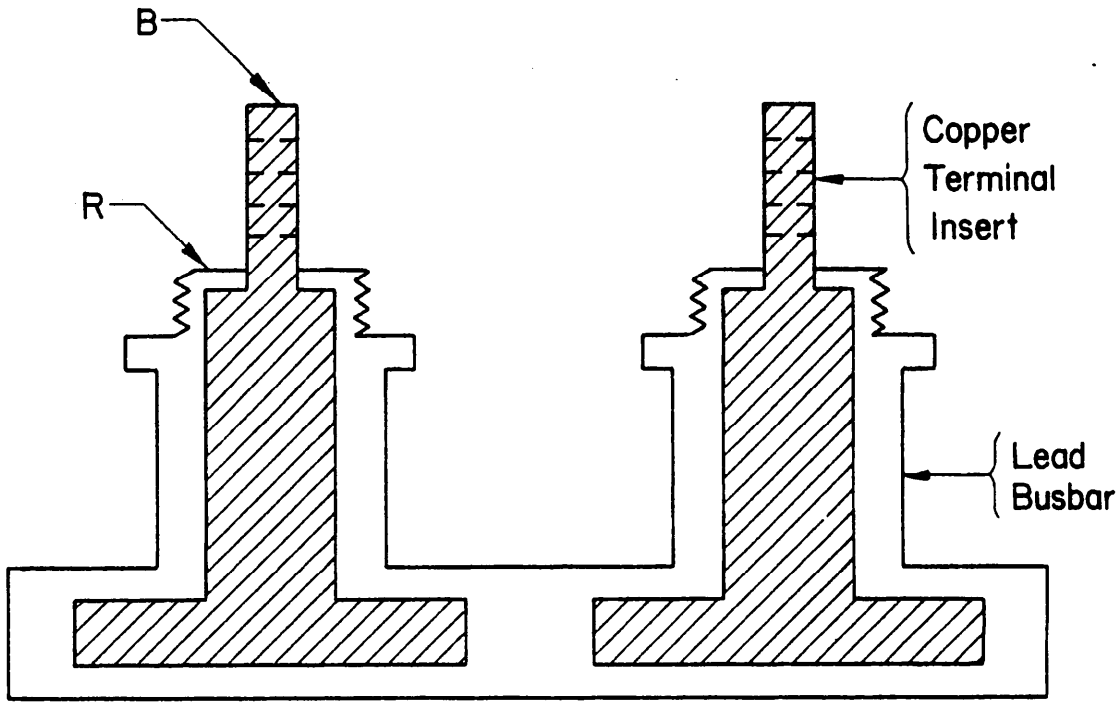


SH 11270

Measure electrical resistance at points R and B on each terminal of the positive and negative bus bar using a J.W. Dice Company model 150 or 153, or equivalent microohmmeter.

FIGURE 1. Terminal resistance measurement.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T19:55Z
Check the source to verify that this is the current version before use.

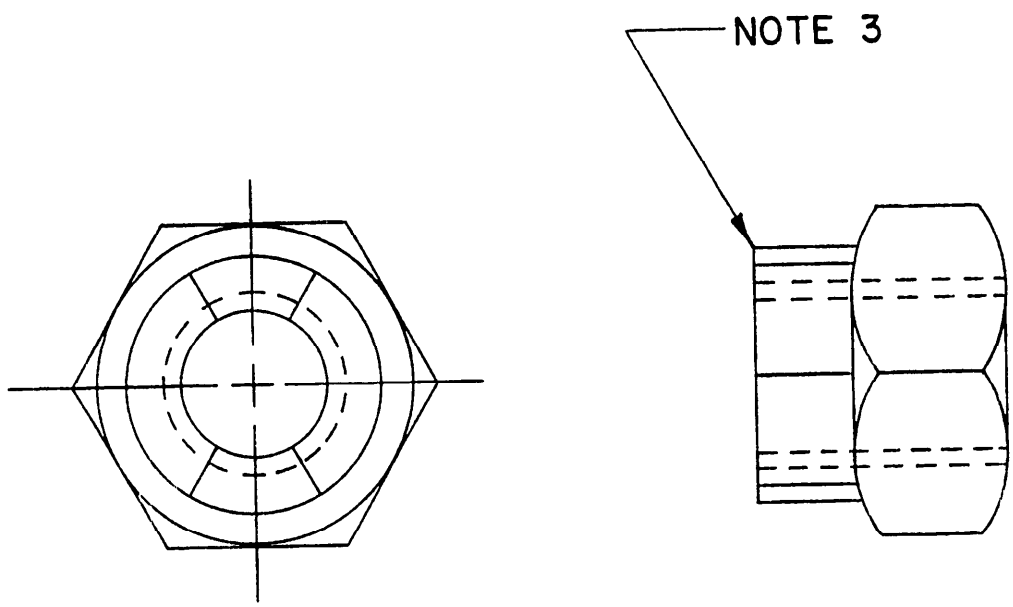

SH 11271

NOTES:
1. Nut threads shall be coated with molybdenum disulfide dry film lubricant.
2. Identification: "316" stamped on flat of hex; multiple stamping permissible.
3. Six slots equally spaced collar crimped to form locking feature to meet torque specifications of MIL-N-25027.

FIGURE 2. Self-locking nut, 250°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:55Z
Check the source to verify that this is the current version before use.