MIL-H-43371B
7 April 1988
SUPERSEDING
MIL-H-43371A
19 September 1973

MILITARY SPECIFICATION

HAT, SUN, REVERSIBLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a two-color reversible, cotton, wide-brimmed, adjustable size, sun hat.

1.2 Classification. The hat shall be of the following types as specified (see 6.2).

Type I - OG-107
Type II - Camouflage Print

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203 - Paper, Kraft, Untreated
CCC-C-438 - Cloth, Buckram, Cotton

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-C-342 - Cloth, Wind-Resistant, Poplin, Cotton
MIL-T-3530 - Thread and Twine: Mildew Resistant or Water Repellent Treated
MIL-C-3924 - Cloth, Oxford, Cotton Warp and Nylon Filling, Quarpel Treated
MIL-F-10884 - Fasteners, Snap
MIL-L-35078 - Loads, Unit; Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43468 - Cloth, Camouflage Pattern; Wind Resistant, Poplin, Cotton
MIL-T-43548 - Thread, Polyester Core: Cotton-, Rayon-, or Polyester-covered
MIL-T-43566 - Tape, Textile, Cotton, General Purpose, Natural or in Colors
MIL-C-43718 - Cloth, Twill, Polyester and Cotton

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

* (Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

* (Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from the specification may appear in the samples in which case the specification shall govern.

3.2.1 Basic material.

3.2.1.1 For type I. The basic material shall be water-resistant, preshrunk, cotton poplin conforming to class B of MIL-C-342 or cotton-warp, nylon-filling, quarpel treated, oxford cloth conforming to class 2 of MIL-C-3924. The color of the cloth for one side of the crown and brim shall be Olive Green 107. The color of the cloth for the other side of the crown and brim and for the adjustment strap lining shall be Orange 338.

3.2.1.2 For type II. The basic material shall be quarpel treated, wind-resistant, cotton poplin conforming to type IV of MIL-C-43468. The color for one side of the crown and brim shall be woodland, camouflage pattern. The color of the cloth for the other side of the crown and brim and for the adjustment strap lining shall be Orange 338 conforming to class B of MIL-C-342 or class 2 of MIL-C-3924.

3.2.2 Brim interlining. The material for interlining the brim shall be natural or bleached cotton buckram, preshrunk, conforming to type II, class 1 or type III, class 1 of CCC-C-438. Alternatively, the interlining shall be polyester and cotton twill cloth conforming to class 1 of MIL-43718.

3.2.3 Adjustment strap. The material for the adjustment strap shall be 5/8 inch cotton tape, Shade Olive Drab 7, conforming to type I, class 3 of MIL-T-43566.

3.2.4 Resin impregnating agent. The resin impregnating agent used in treating ends of strap shall be cellulose acetate, cellulose butyrate, or cellulose acetate butyrate (see operation 8.b).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

3.2.5 Labels. Each hat shall have an identification label conforming to type IV, class 5 of DDD-L-20. The fastness to laundering and fastness to transference requirements of DDD-L-20 shall apply.

3.2.6 Thread. The thread shall be cotton-covered polyester conforming to MIL-T-43548. The size shall be ticket no. 70, 2 ply for the bobbin thread of 401 stitch type and ticket no. 50, 3 ply for all other stitching. The colors shall be as indicated below. The thread shall be water repellent treated in conformance with type II, class 3 of MIL-T-3530. Any of the specified threads may be used for basting.

Color	Use
Shade Olive Drab S-1, C.A. 66022	Needle and bobbin thread of the olive green crown or camouflage crown Needle thread of brim Bobbin thread of strap Needle thread of buttonholes Needle thread joining olive green crown or camouflage crown to brim
Shade DOD Orange TH, 66074	Needle and bobbin thread of the orange crown Bobbin thread of brim Needle thread of strap Bobbin thread of buttonholes Bobbin thread joining olive green crown or camouflage crown to brim Needle and bobbin thread joining orange crown to brim

3.2.6.1 Colorfastness. The dyed treated thread shall show fastness to light, laundering, and chlorine bleaching equal to or better than the standard sample. When no standard sample is available, the dyed treated thread shall show "good" fastness to light, laundering, and chlorine bleaching.

3.2.7 Snap fasteners. The snap fasteners shall be brass conforming to style 3, finish 2, 16-line, male and female complete, consisting of four separate components: pronged ring, socket, stud and eyelet conforming to MIL-F-10884.

3.3 Design. The hat is a lightweight soft crowned, reversible, two-color model with a quilt stitched brim and a size adjustment strap interlaced through six buttonhole slits at base of crown (see figure 1).

3.4 Construction. The construction shall conform in all respects to the requirements specified in table I and herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

3.4.1 Stitches, seams, and stitchings. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams occur.

3.4.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.4.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area (1/2 inch on box, box-x and W-W stitching) and continue a minimum of 1 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

NOTE: When making the above repairs, the ends of the stitching are not required to be backstitched.

3.4.1.2 Type 304 zig zag stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching. Repairs shall be in accordance with 3.4.1.1.1a and 3.4.1.1.1b except the stitching shall overstitch the defective stitching area a minimum of three stitches onto the existing stitching.

3.4.1.3 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements of the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping, or backstitches are used to secure the ends of the stitching.

3.4.1.4 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

3.4.2 Setting of snap fasteners. A hole shall be prepunched before inserting the male or female part of the snap fastener. The hole shall be smaller than the outside diameter of the fastener barrel so that the barrel must be forced through the hole. The hole shall not be punched in the setting operation with the button or eyelet barrel. The fasteners shall be securely clinched without cutting the adjacent material and no more than three splits shall occur in the button or eyelet barrels.

3.5 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the hat.

3.5.1 Replacement of defective components. During the spreading, cutting and manufacturing process, components of the hat having material defects or damages that are classified as defects in 4.2.2 shall be removed from production and replaced with non-defective and properly matched components.

3.6 Patterns. Standard patterns, which provide an allowance for all seams will be furnished by the Government and shall be used as a guide for cutting working patterns. The standard patterns shall not be altered in any manner and the working patterns shall be cut to conform with the standard patterns.

3.7 Pattern parts. The component parts for the hat shall be cut from materials as specified in accordance with pattern parts indicated below:

Material	Nomenclature	Cut
Poplin or oxford cloth, olive green	Crown 1/ Brim 2/	6 1
Poplin, camouflage	Crown 1/ Brim 2/	6 1
Poplin or oxford cloth, orange	Crown 1/ Brim 2/	6 1
Buckram or twill	Brim interlining	1

1/ Use same pattern.

2/ Use same pattern.

3.8 Figure. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the written document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

3.9 Manufacturing operations requirements. The hat shall be made by and with the use of all operations shown in table I. Unless otherwise specified in table I, the contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, providing the thread is removed or does not show on the hat.

3.10 Stitches per inch. The minimum and maximum number of stitches per inch shall be specified in table I. The stitches per inch for basting operations shall be the option of the supplier.

3.11 Shade marking. The components of the hat shall be marked to insure a uniform shade throughout the hat. Any method of marking may be used except:

a. Metal fastening devices.
b. Sew-on type tickets.
c. Adhesive type tickets which discolor or adhere to the fabric upon removal of the ticket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut material in strict accordance with patterns furnished which show size, shape, directional lines, placement of buttonholes, and notches for proper assembly. b. Cut all olive green or camouflage parts of the hat from the same piece of material. c. Cut all orange parts of the hat except the adjustment strap lining from the same piece of material. d. The brim interlining may be cut in two pieces providing an allowance of 1/4 inch is added for seaming (see operation 4.a). e. Cut the tape for the adjustment strap of sufficient length to measure 25-1/4 to 25-1/2 inches long when finished with the snap fasteners attached (see operation 8). f. Cut the adjustment strap lining (orange color basic material) on the straight of sufficient width to finish the width of the tape, when attached as specified in operation 8.a.						
2.	Replacement of damaged parts. a. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as classified in 4.2.2, are excluded and replaced with non-defective and properly mated material.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. Mark ticket or bundle all component parts to insure a uniform shade and proper assembly.						
4.	Make brim.						
	a. If interlining is cut in two pieces (see 1.d), overlap the straight edges 1/4 inch and baste or stitch across brim 1/8 inch from edges.	301 101	LSa-1 LSa-1	2-12 2-12	50-3 70-2 50-3 or 70-2	50-3 70-2	
	b. Superimpose the orange brim, the olive green brim, and the interlining with the brims face to face and the interlining next to the orange brim. With outside edges even and with the notches matched, stitch all plies together 1/16 to 1/8 inch from edges. The two brims or one brim and the interlining may be basted or stitched together, prior to stitching all plies together.	101 or 301 or 401	SSa-1 SSa-1 SSa-1	8-12 8-12 8-12	50-3 50-3 50-3	 50-3 70-2	
	c. Turn brim, force out edge, smooth out all plies and stitch around outer edge of brim 1/16 to 1/8 inch from edge; continue stitching the entire brim, spirally with the rows of stitching 1/8 to 1/4 inch apart. The brim may be basted prior to stitching spirally. The brim shall finish smooth and flat without twists, pleats, or fullness between the rows of stitching.	301	SSe-2(b) and SSv-	8-12	50-3	50-3	
5.	Make crown (one of each color).						
	a. Join panels of each crown together, except center seams. Turn to right side and raise stitch each seam 1/16 to 3/32 inch from edge.	301 or 401	LSq-2 LSq-2	8-12 8-12	50-3 50-3	50-3 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make crown (one of each color). (cont'd)						
	b. Join the center seam of each crown in one continuous operation. Turn crowns to right side and raise stitch 1/16 to 3/32 inch from edge.	301 or 401	LSq-2 LSq-2	8-12 8-12	50-3 50-3	50-3 70-2	
6.	Join crowns to brim.						
	a. Turn in the bottom edge of the orange crown, overlap on the orange side of the brim with the raw edges even and stitch with one row of stitching 1/16 to 3/32 inch from folded edge.	301 or 401	LSb-1 LSb-1	8-12 8-12	50-3 50-3	50-3 70-2	
	or						
	b. Baste or stitch the bottom edge of the orange crown to the bottom edge of the brim. Turn seam up towards crown and raise stitch 1/16 to 3/32 inch from edge.	101 or 301 or 401 and 301 or 401	LSq-2(a) LSq-2(a) LSq-2(a) LSq-2(b) LSq-2(b)	4-12 4-12 4-12 8-12 8-12	50-3 50-3 50-3 50-3 50-3	 50-3 70-2 50-3 70-2	
	c. Turn in bottom edge of the olive green crown and stitch 1/16 to 3/32 inch from folded edge through all plies of brim and through orange crown.	301		8-12	50-3	50-3	
7.	Make buttonholes.						
	Center a 3/4 to 7/8 inch cut-length vertical buttonhole on each crown panel as indicated on pattern. The bottom of each buttonhole shall be 1/4 to 3/8 inch from the bottom edge of the olive green crown. An off center tolerance of 1/4 inch is permitted.	304		42-48 per buttonhole including tack	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make adjustment strap. a. Turn in the raw edge on each side of the strap lining (see 1.f), superimpose on the adjustment strap and stitch 1/16 to 1/8 inch from each edge. b. Chemically treat each end of strap to prevent fraying (see 3.2.4). c. Attach six snap fasteners to the adjustment strap. Position the first socket (female) and first stud (Male) 1/2 ± 1/16 inch from end of strap, measured from center of fasteners to end of strap. Position the remaining five sockets 1 ± 1/16 inches apart (center to center). Position the five remaining studs to correspond with the five sockets. The studs shall finish on the tape side (olive green) and the sockets shall finish on the lining side (orange).	301	SSb-1 each side	8-12	50-3	50-3	
9.	Insert size adjustment strap. Insert size adjustment strap with colors matching. Engage strap using first male and female snap fasteners.						
10.	Apply label. Apply the label to the orange side of the brim. The bottom of the label shall be 2 ± 1/4 inches from the edge of the brim, measured at center of label.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Clean hat. a. Trim all thread ends and remove loose threads on inside and outside of hat. b. Remove all shade markings. c. Remove all spots and stains.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

3.12 Finished measurements. The finished dimensions for the hat shall conform to table II.

TABLE II. Finished measurements (in inches)

Circumference 1/	Crown height 2/	Brim width 3/	Length of strap 4/
24-3/4 ± 1/4	7-1/4 ± 1/8	2-3/4 +1 -1/8	25-1/4 +1/4 -0

1/ Remove adjustment strap, measure inside circumference along brim-to-crown joining seam.

2/ Measure through center of one of the side panels from the brim-to-crown joining seam to the crown center seam.

3/ Measure (any place on brim) from brim-to-crown joining seam to the outer edge of brim.

4/ With nominal tension on strap measure from end to end.

3.13 Workmanship. The finished hat shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and material shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this document or applicable purchase document.

4.2.1.1 Certification. The cellulose acetate, cellulose butyrate, or cellulose acetate butyrate shall be accepted on the basis of supplier's certificate of compliance.

4.2.2 End item visual examination. The end items shall be examined for the defects listed in table III. The lot size shall be expressed in units of hats. The sample unit shall be one hat. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 15.0.

TABLE III. End item visual defects

Examine	Defects
Material defects and damages	Hole, cut, tear, needle chew, friction burn when fibers are broken or large exposed drill hole Mend, darn or patch clearly visible Smash, multiple float or multiple snags
Shaded parts	Crown part shaded
Cleanness	Spot or stain One or more shade tickets not removed Any shade marking visible Thread ends not trimmed, or loose threads not removed throughout the hat
Component and assembly	Any component not as specified Any component part or required operation omitted (unless otherwise classified herein) Any operation not performed as specified (unless otherwise classified herein)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defects
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements
Seams and stitching	Accuracy of seaming: 1. Seam twisted, puckered or pleated 2. Part of material caught in unrelated operation or stitching 3. End of stitching, when not caught in other seams or stitching, backtacked less than 1/2 inch 4. Stitching overlapping end(s) of thread break less than 1/2 inch (1 inch for stitch type 301) 5. Ends of a continuous line of stitching overlapped less than 1/2 inch Gage of stitching and seam allowances: 1. Irregular, i.e., unevenly gaged or corresponding stitching not uniform (to be scored only when condition exists along major portion of seam) 2. Width of seam allowance not as specified or gage of stitching not within range specified or varies more than 1/16 inch when no range is specified More than 1/4 inch of broken or missing stitches (all stitching except buttonholes) Skipped stitches more than 1/4 inch long Runoff more than 3/8 inch long Raw edge more than 1/4 inch long Seam and stitch type: 1. Seam type or stitch type not as specified 2. Looper thread of stitch type 401 visible More than maximum or less than minimum stitches per inch Stitch tension: 1. Loose tension resulting in a loose seam 2. Loose tension (exposed loops of top or bottom threads): - on crown, more than 1 inch long - on brim, more than 1 inch long Tight tension (stitches break when strain is applied in the direction of the seam)
Buttonholes	Buttonhole stitching(s) not securely caught in the fabric causing stitches to pull away from fabric Buttonhole(s) not specified type or uncut Buttonhole(s) omitted One or more broken or skipped stitches in buttonhole(s)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defects
Buttonholes (cont'd)	Ragged edges on buttonhole(s) Cut length of buttonhole: - less than 3/4 inch - more than 7/8 inch Buttonhole(s) off center on panel by more than 1/4 inch Buttonhole(s) not vertically positioned End of buttonhole(s) less than 1/4 or more than 3/8 inch from bottom edge of the olive green crown Buttonholes not through both crowns Orange thread on olive green brim or olive drab thread on orange brim
Label	Missing, incorrect or illegible Not positioned as specified - less than 1-3/4 or more than 2-1/4 inches from edge of brim
Brim	Edge not completely forced out Orange thread on olive green brim or olive drab thread on orange brim Twists, pleats, or excessive fullness between the rows of stitching
Crown	Poorly shaped Olive drab thread on the orange crown at crown-to-brim joining seam
Adjustment strap	End(s) of strap not chemically treated First stud or first socket less than 7/16 or more than 9/16 inch from end of strap Socket part(s) of snap fastener set less than 15/16 or more than 1-1/6 inches apart One or more stud parts of snap fastener out of alignment with socket parts Snap fastener missing, not securely clinched or defective affecting function Snap fastener(s) clinched too tightly, cutting fabric Rough or sharp edges on snap fastener(s) Stud part(s) of snap fastener not on tape side of strap or socket part(s) not on lining (orange) side Orange thread on tape side of strap or olive drab thread on the orange lining side of strap

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

4.2.3 End item dimensional examination. The end item shall be examined for the dimensions listed in table II. The lot size shall be expressed in units of hats. The sample unit shall be one hat. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flaps, loose strapping, improper taping, or inadequate stapling Bulging or distortion of containers
Content	Number of hats per shipping container is more or less than specified. 1/

1/ For this defect one shipping container shall be examined.

4.2.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified.

5.1.1 Level A. Ten hats shall be uniformly laid one over the other. The crown portion shall be pressed down to assume a flattened stack. Each bundle shall be cross-tied with cotton tape or twine. The bundle shall measure 13-3/4 by 12-1/4 by 2 inches.

5.1.2 Commercial. Each hat shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. One hundred and twenty hats, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25 inches in length, 14-1/4 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. One hundred and twenty hats, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25 inches in length, 14-1/4 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4.

5.2.3 Commercial packing. Hats, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), hats packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The hat is intended for wear by personnel of the Department of Defense as a component of hot climate and overwater survival kits.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
c. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
d. When palletization is required (see 5.3).
e. Type and class of unit load required (see 5.2.1).

6.3 Samples. For access of samples, address the contracting activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.2).

6.5 Subject term (key word) listing).

Hat, camouflage
Hat, sun
Survival kit

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 82

Review activities:


Army - MD
DLA - CT


Preparing activity:

Army - GL

Project No. 8415-0568

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

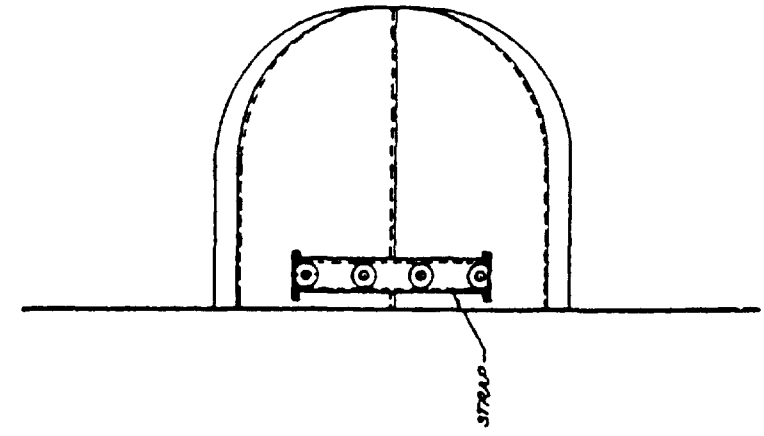

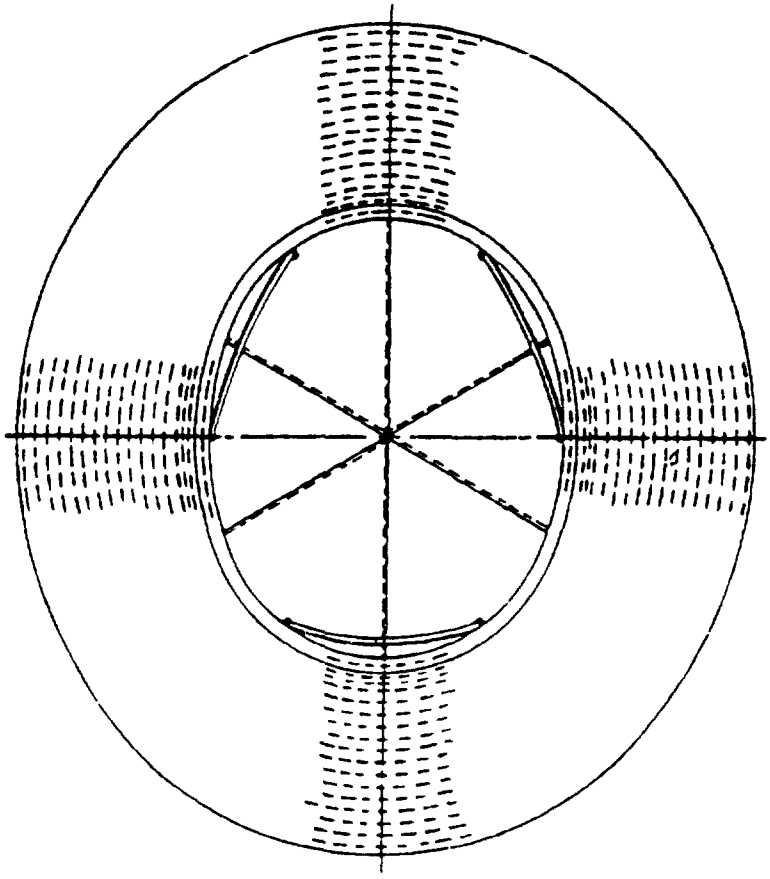

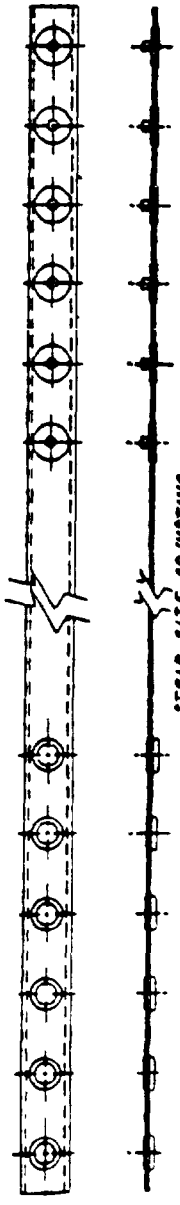


FIGURE I HAT, SUN, REVERSIBLE

21

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U S Army Natick Research, Development
and Engineering Center
ATTN STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-H-43371B	HAT, SUN, REVERSIBLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

NATICK OP-1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:16Z
Check the source to verify that this is the current version before use.