MIL-O-43345B
21 June 1978
SUPERSEDING
MIL-O-43345A
25 November 1966

MILITARY SPECIFICATION

OILERS, SELF-FEEDING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers self-feeding oilers for light lubrication of mechanical equipment.

1.2 Classification. The oilers shall be of the following styles, classes, and sizes as specified (see 6.2):

Style I - Under-feed, .200 ounce, aluminum, .3125 - 32 UNEF - 2A thread

Style II - Over-feed

Size 1 - .031 ounce, steel or bronze, .3125 - 32 UNEF - 2A thread
Size 2 - .156 ounce, steel or bronze, 1/8 - 27 NPT thread
Size 3 - .250 ounce, brass or bronze, 1/8 - 27 NPT thread
Size 4 - .800 ounce, steel or bronze, 1/4 - 18 NPT thread
Size 5 - 1.500 ounce, steel or bronze, 1/2 - 14 NPT thread
Size 6 - 3.000 ounce, steel or bronze, 1/2 - 14 NPT thread

Style III - Side-feed

Size 1 - .094 ounce, steel or bronze, 1/8 - 27 NPT thread
Size 2 - .281 ounce, steel or bronze, 1/8 - 27 NPT thread

FSC 4930

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:13Z
Check the source to verify that this is the current version before use.

Style IV - Visible oil supply (transparent reservoir)

Class 1 - Without sight feed, 8.000 ounce, brass or bronze, .3750 - 24 UNF - 2A thread (wick feed)
Class 2 - With sight feed (drip feed)

Size 1 - .750 ounce, brass or bronze, 1/8 - 27 NPT thread
Size 2 - 1.000 ounce, brass or bronze, 1/4 - 18 NPT thread
Size 3 - 2.500 ounce, brass or bronze, 3/8 - 18 NPT thread
Size 4 - 5.000 ounce, brass or bronze, 3/8 - 18 NPT thread
Size 5 - 10.000 ounce, brass or bronze, 1/2 - 14 NPT thread

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-676	- Boxes, Set-Up, Paperboard.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-S-7742	- Screw Threads, Standard, Optimum Selected Series, General Specification for.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T21:13Z
Check the source to verify that this is the current version before use.

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS (NBS)

Handbook H-28 - Screw Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The self-feeding oilers shall be as shown in Figure 1 and as specified herein.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2, 6.2, and 6.3).

3.3 Standard product. The self-feeding oilers furnished under this specification shall be the manufacturer's current standard product, except for those modifications or additional changes required in that standard product in order to comply with the requirements of this specification.

3.4 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:13Z
Check the source to verify that this is the current version before use.

3.5 Design and construction. The oilers shall be designed and dimensioned to conform to the specified style, class, and size (see 1.2) as shown in Figure 1.

3.5.1 Wicks. All oilers, except Style IV, Class 2, shall have wicks of the size, material, and fabrication normally used in the identical commercial oiler (see Figure 1). The wick shall extend not less than .1250 inch outside the threaded section of the shank.

3.5.2 Sight feed. Style IV, Class 2 oilers shall be equipped with a transparent sight feed for observing the flow of oil so that proper flow can be obtained by turning the adjustment screw (see Figure 1).

3.5.3 Threads. Screw threads shall be as shown in Figure 1. Taper threads shall conform to NBS Handbook H-28 and straight threads shall conform to MIL-S-7742.

3.5.4 Hexagon shanks. A hexagonal section shall be provided on the shanks of all styles of oilers except Style 1 (see Figure 1).

3.5.5 Leakage. The oilers shall not leak when tested in accordance with 4.5.2.

3.5.6 Tolerances.

3.5.6.1 Capacity. The capacity shall vary not more than a minimum of 10 percent from the specified capacity (see 1.2 and Figure 1) when tested in accordance with 4.5.2.

3.5.6.2 Dimensions. Dimensions shall vary not more than plus or minus .1250 inch except for threads, but in no case shall this tolerance affect the capacity tolerance as specified in 3.5.6.1.

3.6 Finish. The oilers shall be finished in accordance with the manufacturers' commercial practice.

3.7 Marking. Each oiler shall be marked in accordance with MIL-STD-130.

3.8 Workmanship. Each oiler shall be free of all sharp edges, burrs, cracks, pits, rust, and scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and figures, as applicable.

4.2 Classification of inspections. The inspection procedures specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. When a first article sample is required, the first article sample shall be examined for the defects in Table I.

4.3.2 Test. When a first article sample is required, the first article sample shall be tested as specified in 4.5.2.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination.

4.4.2.1 Samples. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 4.0 percent defective for major defects and 6.5 percent defective for minor defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

4.4.3 Test.

4.4.3.1 Samples. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 1.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The oiler(s) shall be examined as specified in Table I.

TABLE I. Classification of defects.

Examination	Defect	Classification Major	Minor
Construction and workmanship	101. Part missing or loose.	X	
	102. Sharp edges, pits, rust, cracks, scale, or burrs.	X	
	103. Wick missing where applicable.	X	
	104. Transparent sight feed missing where applicable.	X	
	105. Not threaded.	X	
	106. Hexagon section missing on shanks.	X	
	107. Threaded fittings not as specified.	X	
Marking	201. Missing, incomplete, incorrect, or illegible.		X
Finish	202. Not manufacturer's commercial finish.		X

4.5.2 Test. The oiler(s) shall be filled to the specified capacity with SAE 20 oil and examined for leakage and capacity to determine compliance with 3.5.5 and 3.5.6.1.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

108.	Materials or containers not as specified. Each incorrect material or container shall constitute one defect.
109.	Oilers of unlike description consolidated.
110.	Box closure not Method V as specified.
111.	Oilers of unlike description packed together.
112.	Strapping not as specified.
113.	Marking illegible, incomplete, incorrect, or missing.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each oiler shall be preserved in a close-fitting box conforming to PPP-B-566 or PPP-B-676, style, type, grade, and class optional. Oilers requiring a contact preservative in accordance with the preservative application criteria of MIL-P-116 shall be coated with Type P-2 preservative and wrapped with barrier material conforming to MIL-B-121, Type II, Grade A, Class 2 prior to being placed in the container.

5.1.1.1 Consolidation. Oilers of like description preserved as specified in 5.1.1 shall be consolidated in close-fitting boxes conforming to PPP-B-636, W6c, style optional. Box closure shall be in accordance with the appendix to the box specification, Method V.

5.1.2 Commercial. Oilers shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.2.1 Level A. Oilers of like description, preserved as specified in 5.1 shall be packed in close-fitting boxes conforming to PPP-B-601, Overseas Type, style optional. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable. Unless otherwise specified (see 6.2) strapping shall be Finish B. When specified (see 6.2) strapping shall be Finish A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Packing shall be as specified in 5.2.1 for Level A, except that boxes shall be Domestic Type and strapping shall be Finish A.

5.2.3 Commercial. Oilers shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The self-feeding oilers are intended for light lubrication of mechanical equipment.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Style, class, and size required (see 1.2).
(c) When a first article is required for inspection and approval (see 3.2, 4.2, 4.3, and 6.3).
(d) Degree of preservation and degree of packing required (see 5.1 and 5.2).
(e) When Finish A strapping is required (see 5.2.1).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The first article should be a standard production item from the contractor's current inventory (see 3.3). The first article should consist of 2 units. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for examinations, test, and approval of the first article.

6.4 Classification of changes. Changes in classification of the oilers between this revision of the specification and the previous edition are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

Old designation

Style I - Under-feed, .20 ounce, aluminum, 5/16 - 32 UNEF - 2A thread
Style II - Over-feed
Size 1 - 1/32 ounce, steel or bronze, 5/16 - 32 UNEF- 2A thread
Size 2 - 5/32 ounce, steel or bronze, 1/8 - 27 NPT thread
Size 3 - 1/4 ounce, brass or bronze, 1/8 - 27 NPT thread
Size 4 - .8 ounce, steel or bronze, 1/4 - 18 NPT thread
Size 5 - 1.25 ounce, steel or bronze, 3/8 - 18 NPT thread
Size 6 - 3 ounce, steel or bronze, 1/4 - 18 NPT thread
Style III - Side-feed
Size 1 - 3/32 ounce, steel or bronze, 1/8 - 27 NPT thread
Size 2 - 9/32 ounce, steel or bronze, 1/8 - 27 NPT thread
Style IV - Visible oil supply (transparent reservoir)
Class 1 - Without sight feed, 8 ounce, brass or bronze, 3/8 - 24 UNF thread (wick feed)
Class 2 - With sight feed (drip feed)
Size 1 - 3/4 ounce, brass or bronze, 1/8 - 27 NPT thread

New designation

Style I - Under-feed .200 ounce, aluminum, .3125 - 32 UNEF - 2A thread
Style II - Over-feed
Size 1 - .031 ounce, steel or bronze, .3125 - 32 UNEF - 2A thread
Size 2 - .156 ounce, steel or bronze, 1/8 - 27 NPT thread
Size 3 - .250 ounce, brass or bronze, 1/8 - 27 NPT thread
Size 4 - .800 ounce, steel or bronze, 1/4 - 18 NPT thread
Size 5 - 1.500 ounce, steel or bronze, 1/2 - 14 NPT thread
Size 6 - 3.000 ounce, steel or bronze, 1/2 - 14 NPT thread
Style III - Side-feed
Size 1 - .094 ounce, steel or bronze, 1/8 - 27 NPT thread
Size 2 - .281 ounce, steel or bronze, 1/8 - 27 NPT thread
Style IV - Visible oil supply (transparent reservoir)
Class 1 - Without sight feed, 8.000 ounce, brass or bronze, .3750 - 24 UNF 2A thread (wick feed)
Class 2 - With sight feed (drip feed)
Size 1 - .750 ounce, brass or bronze, 1/8 - 27 NPT thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

Old designation	New designation
Size 2 - 1 ounce, brass or bronze, 1/4 - 18 NPT thread	Size 2 - 1.000 ounce, brass or bronze, 1/4 - 18 NPT thread
Size 3 - 2.5 ounce, brass or bronze, 3/8 - 18 NPT thread	Size 3 - 2.500 ounce, brass or bronze, 3/8 - 18 NPT thread
Size 4 - 5 ounce, brass or bronze, 3/8 - 18 NPT thread	Size 4 - 5.000 ounce, brass or bronze, 3/8 - 18 NPT thread
Size 5 - 10 ounce, brass or bronze, 1/2 - 14 NPT thread	Size 5 - 10.000 ounce, brass or bronze, 1/2 - 14 NPT thread

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.4).

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review activity:
DLA - CS

Preparing activity:
Army - ME

Project 4930-0285

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:13Z
Check the source to verify that this is the currentversion before use.

X-3347A

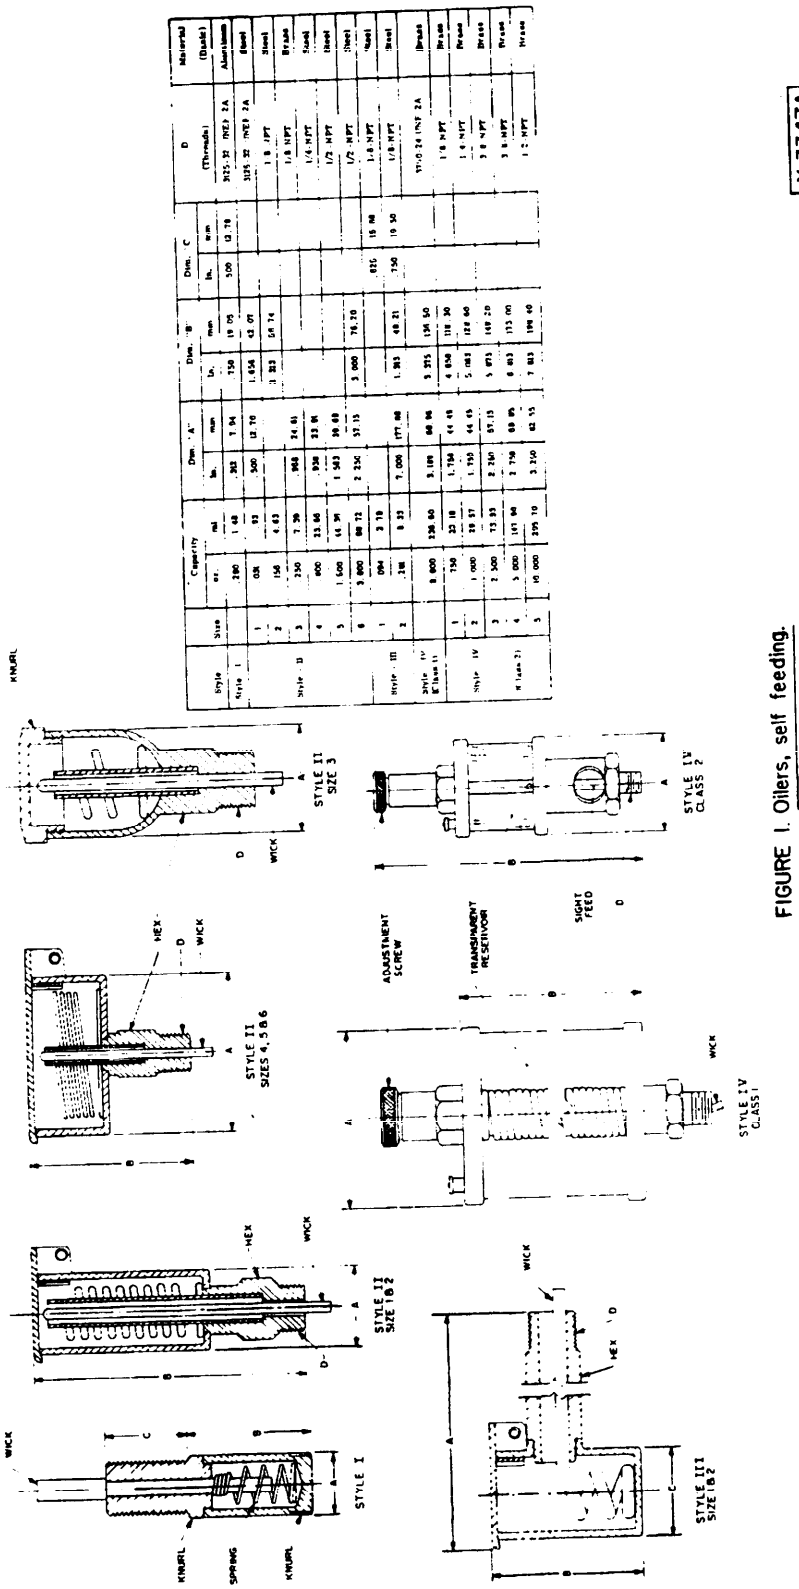


FIGURE 1. Oilers, self feeding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-O-43345B Oilers, Self-Feeding

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research
and Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:13Z
Check the source to verify that this is the current version before use.