REVIEW ACTIVITIES: ARMY - MD, ME
NAVY - OS, YD

USER ACTIVITIES: ARMY - ME

FED. SUP CLASS
6640



MS36576-1

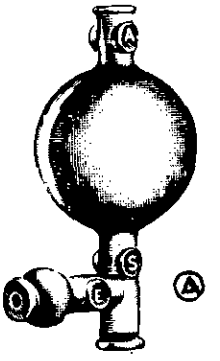

MS36576-2

PART NUMBER	MAX PIPET ACCOMMODATED ml	MINIMUM DELIVERY ml	NOMINAL TUBE ACCOMMODATED OD mm
MS36576-1	20	0.01	9
MS36576-2	100	0.01	9

MATERIAL: MS36576-1 shall be polypropylene plastic with a polyolefin ball valve.

MS36576-2 shall be new material, non-blooming rubber.

Bulb shall be of oil-resistant synthetic rubber.

DESIGN: MS36576-1 shall be equipped with a finger loop for holding, a rubber filling bulb, a rubber connector for attaching a pipet mouthpiece and a side tube containing a check valve with a polyolefin ball.

MS36576-2 shall be molded of one piece construction and shall consists of a filling bulb, approximately 2-1/8 inches in diameter, three agate ball valves (A, S, and E) which are opened by pinching and a small expelling bulb.

Upper valve "A" permits evacuation of the bulb. Valve "S" in the lower stem applies bulb suction to the pipet for filling. Side arm in the lower stem contains a valve "E" for delivery and a small bulb for expelling the last drop.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.

APPROVED 14 July 1966 REVISED (A) 2 April 1973

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MU	TITLE	MILITARY STANDARD
Other Cust MS 82	FILLER, PIPET	MS36576
Procurement Specification NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 62 672 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:43Z
Check the source to verify that this is the current version before use.