FED. SUP CLASS
6640

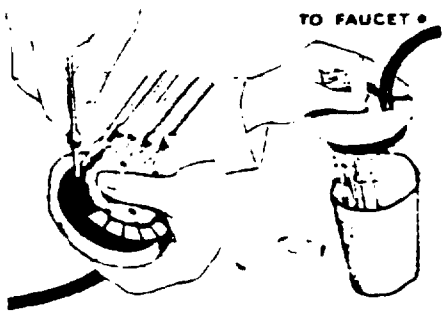

MATERIAL: Washer shall be made of rubber and aluminum.

DESIGN: Pipets shall be held in rubber sockets and suspended from an aluminum clip supported on the rim of a jar containing detergent or rinse. The washer shall have flap valves which are lifted to insert the pipets; unused holes are automatically closed off so the liquid will only pass through the pipets. Liquid shall be drawn through pipets by an aspirator pump connected to suction nipple with 7 mm

The pipets to be washed sh to 7 mm within 19 mm from upper end. Pipe washed.

NOTES: 1. Items minor variations in der this document, ice and are not in d herein.

CANCELLED
CANCELLED AFTER 9 JUL 1991
NO SUPERSEDING STANDARD

Ⓐ CANCELLATION

APPROVED 8 NOV 1983 REVISED Ⓐ 9 JUL 1991

P.A. EA Other Cust MS 99	INTERNATIONAL INTEREST	TITLE WASHER, PIPET, AUTOMATIC, ADAMS TYPE	MILITARY STANDARD MS36591
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 71 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE CANCELLATION

Project Number 6640-1714-02

USER ACTIVITIES: ARMY - DM, MD
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.