MILITARY STANDARD

TRANSFORMERS, INDUCTORS, AND COILS SELECTION AND USE OF

TO ALL HOLDERS OF MIL-STD-1286C:

1. THE FOLLOWING PAGES OF MIL-STD-1286C HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
7		7	6 September 1983
8	6 September 1983	Reprinted without change	
101.1	28 October 1985	101.1	6 September 1983
101.2	9 September 1980	Reprinted without change	
101.31	9 September 1980	Reprinted without change	
101.32	28 October 1985	101.32	6 September 1983
101.33	28 October 1985	101.33	6 September 1983
101.34	6 September 1983	Reprinted without change	
101.34a	28 October 1985	101.34a	6 September 1983
101.34b	6 September 1983	Reprinted without change	
102.11	9 September 1980	Reprinted without change	
102.12	28 October 1985	102.12	6 September 1983

2. RETAIN THIS NOTICE AND INSERT BEFORE THE TABLE OF CONTENTS.

3. Holders of MIL-STD-1286C will verify that page changes and additions indicated above have been entered. This notice page will be retained as a check sheet. This issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0656)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TABLE I. Power transformers (see section 101).

Applicable MIL-T-27 specification sheet	Primary voltage (volts rms)	Secondary 1/ 2/ voltage (volts rms)	Secondary current 2/ (amperes rms)	Volt-ampere rating
60 HERTZ TRANSFORMERS				
127	100	21.2, 21.2, 7.78 CT	.1, .1, .225	1.75
300	105, 115, 125	2.5 to 6.3	3 to 20	7.5 to 126
156	115	7.76 to 13.44	105 mA	4.8
18	115	48	12	5.76
157	115	8.25 to 13.44	.4	16
181	115	6.3 CT, 450 CT	2, 30 mA	26.1
19	115	6.3, 52 CT	3, 1	52
140	115	50	2	100
268	115	115	1	115
235	115	115	.435 to 15.5	50 to 100
109	115	230	.65	126
400 HERTZ TRANSFORMERS				
82	26	3.8 CT	.002	.008
180	57.5, 99.7, 115	12.6, 12.6 CT	2, 2	51
221	107	49 CT, 5.3, 10	.01, 1.63, .6	37
220	107	49 CT, 6.35	.01, .01	100
223	107	49 CT, 5.55, 8.45	.01, 2.86, 16.4	125
223	107	49 CT, 5.57	.01, 22.5	130
222	107	49 CT, 5.68	.01, 27.8	160
224	107	49 CT, 5.76, 8.24	.01, 30, 2.14	214
131	108, 120, 132	66	1.8	123
73	115	3, 3	6 mA, 6 mA	.036
225	115	37 CT	.015	.6
37, 39, 48, 49	115	6 CT to 300 CT	.25 to .005	1.5
227	115	13.1, 11.7	.1, .05	1.9
39, 40, 50, 51	115	6 CT to 300 CT	.5 to .01	3
118	115	40 CT	.078	3.12
41, 42, 52, 53	115	6 CT to 300 CT	1.0 to .02	6
43, 54	115	6 CT to 300 CT	1.5 to .03	9
44, 45, 55, 61	115	6 CT to 300 CT	2.667 to .053	16
46, 47, 56, 62	115	6 CT to 300 CT	4.167 to .083	25
80	115	12, 46 CT	.3, 1	49.6
57, 63	115	6 CT to 300 CT	8.33 to .167	50
77	115	115	.45	57
269	115	115	.5	57.5
58, 64	115	10 CT to 300 CT	7.5 to .25	75
59, 65	115	12 CT to 300 CT	8.33 to .33	100
60, 66	115	26 CT to 300 CT	9.62 to .83	250
256	115	129.5	3.2	350
134	120	28.6	.385	12
210	250	1	.5	.5
211	250	30	.5	15
212	250	250, 25	.2, .01	50

1/ CT indicates center-tap.
2/ Where a range is given, the specification covers two or more parts.

Supersedes page 7
of Notice 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TABLE II. Audio frequency transformers (see section 102).

Applicable MIL-T-27 specification sheet	Power 1/ rating (milliwatts)	Frequency response (hertz)	Primary 1/ impedance range (ohms)	Secondary 1/ impedance range (ohms)
197	4 to 10,000	30 to 20,000	20 to 30K	16 to 80K
166	3 to 250	50 to 10,000	82 to 20K	8 to 1M
67	500	60 to 10,000	250 to 10K	4 to 10K
68	500	100 to 10,000	250 to 10K	4 to 25K
78	631	200 to 15,000	4K	600
69	500	100 to 20,000	250 to 25K	4 to 25K
247	2 watts	200 to 10,000	600 to 10K	3.2 to 10K
165	10 to 250	200 to 20,000	50 to 100K	3.2 to 250K
70	60, 150	200 to 50,000	600 to 100K	4 to 10K
1	2 watts	250 to 500	4K	8
2	2 watts	250 to 500	4K	8
170	1	300 to 3400	600	1200
277	1	300 to 3000	150	150
307	7	300 to 4000	600 SPLIT	600
200	30	300 to 10,000	30K	50
3	15 dBm	↓	10K CT	22.5K CT, 90 K CT
4	2 watts	↓	600 CT/150 SP	16, 8, 4
5	15 dBm	↓	600 CT/150 SP	135K CT
6	15 dBm	↓	600 CT/150 SP	600 CT/150 SP
7	2 watts	↓	7.6K, 4.8K	600 CT/150 SP
8	2 watts	↓	7.6K, 4.8K	16, 8, 4
9	2 watts	↓	15K CT	600 CT/150 SP
10	1 watt	↓	24K CT	600 CT/150 SP
11	.5 watt	↓	60K CT	600 CT/150 SP
167	5, 100	300 to 20,000	50 to 50K	3.2 to 90K
76	25, 50, 100	300 to 20,000	1K to 200K	50 to 12K
72	10, 50	300 to 100,000	600 to 100K	60 to 10K
71	10, 30	300 to 100,000	600 to 100K	4 to 25K
172	25 to 600	300 to 100,000	80 to 200K	3.2 to 12K
173	40, 75, 80	300 to 250,000	1K to 25K	12 to 8K
103	50 to 500	400 to 100,000	80 to 30K	32 to 12K
97	125	400 to 100,000	2K	8K
125	.001	10,000 to 20,000	15	100K

1/ Where a range is given, the specification covers two or more parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/18 -01	115 60 Hz (1-2)	48 CT (3-5)	.12	357 (1-2) 357 (3-5)	5.76	5	130°C	See MIL-T-27/18
MIL-T-27/19 -01	115 60 Hz (1-2)	52 CT (3-5)	1.0	357 (1-2) 357 (3-5)	52	5	130°C	See MIL-T-27/19
MIL-T-27/26 -01	115 400 Hz (1-2)	57.5 (3-4)	52 mA	325 (1-2) 325 (1-2)	3	5	170°C	See MIL-T-27/26

Supersedes page 101.1 of Notice 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no. MIL-T-27/37	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
-01 (A-3)	115, 400 Hz (1-2)	6 CT (3-5)	0.250	325	1.5	5	130°C	See figure 101-1
-02 (A-B)		6.3 CT	0.238					A and B - 1.09 in. max
-03 (A-3)		7	0.214					C - .47 in. max
-04 (A-3)		7.5	0.200					D and E - .800 in.
-05 (A-3)		8	0.188					F and G -.600 in. max
-06 (A-B)		9	0.167					H - .75 in. dia
-07 (A-B)		10	0.150					J - .138
-08 (A-B)		11	0.135					
-09 (A-3)		12	0.125					
-10 (A-B)		12.6	0.119					
-11 (A-B)		13	0.115					
-12 (A-B)		15	0.100					
-13 (A-3)		16	0.094					
-14 (A-B)		18	0.083					
-15 (A-3)		20	0.075					
-16 (A-B)		22	0.068					
-17 (A-B)		24	0.063					
-18 (A-B)		26	0.058					
-19 (A-3)		28	0.053					
-20 (A-B)		30	0.050					
-21 (A-B)		33	0.045					
-22 (A-B)		36	0.042					
-23 (A-B)		39	0.038					
-24 (A-B)		43	0.035					
-25 (A-3)		47	0.032					
-26 (A-B)		51	0.029					
-27 (A-3)		56	0.027					
-28 (A-3)		62	0.024					
-29 (A-3)		68	0.022					
-30 (A-B)		75	0.020					
-31 (A-3)		82	0.018					
-32 (A-B)		91	0.016					
-33 (A-B)		100	0.015					
-34 (A-B)		110	0.014					
-35 (A-B)		115	0.013					
-36 (A-B)		120	0.0125					
-37 (A-B)		130	0.0115					
-38 (A-B)		150	0.010					
-39 (A-3)		180	0.0085	↓				
-40 (A-B)		200	0.0075	440				
-41 (A-3)		220	0.007	440				
-42 (A-3)		240	0.006	440				
-43 (A-B)		270	0.0055	580				
-44 (A-3)	↓	300 ↓	0.005	580	↓	↓	↓	

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no. MIL-T-27/56	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
								See figure 101-3
-01	115, 400 Hz	26 CT	9.62	325	250	4	130°C	A - 2.875 in.
-02		28	8.93					B - 2.000 in.
-03		30	8.33					
-04		33	7.58					
-05		36	6.94					
-06		39	5.41					
-07		43	5.81					
-08		47	5.32					
-09		51	4.90					
-10		56	4.46					
-11		62	4.03					
-12		68	3.68					
-13		75	3.33					
-14		82	3.05					
-15		91	2.75					
-16		100	2.50					
-17		110	2.27					
-18		115	2.17					
-19		120	2.08					
-20		130	1.92					
-21		150	1.66					
-22		180	1.39					
-23		200	1.25	440				
-24		220	1.14	440				
-25		240	1.04	440				
-26		270	0.93	580				
-27		300	0.83	580				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Supersedes page 101.32 of Notice 2

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/73 -01	115 400 Hz (1-2)	3 (3-4) 3 (5-6)	6 mA (3-4) 6 mA (5-6)	185	.036 SH	4	105°C	See MIL-T-27/73
MIL-T-27/77 -01	115 400 Hz (1-2)	115 (3-4)	.46 (3-4)	326 (1-2) 326 (3-4)	56.9	5	170°C	See MIL-T-27/77
MIL-T-27/80 -01	115 400 Hz (1-2)	12 (3-4) 46 CT (5-7)	.3 (3-4) 1 (5-7)	525 (1-2) 525 (3-4) (5-7)	49.6	5	105°C	See MIL-T-27/80
MIL-T-27/82 -01	26 400 Hz (1-2)	3.8 CT (3-5)	.002	50 (1-2) 50 (1-2)	.008	5	155°C	See MIL-T-27/82
MIL-T-27/118 -01	115 400 Hz (1-2)	40 CT (3-5)	.078	155 (1-2) 57 (3-5)	3.12	5	130°C	See MIL-T-27/118
MIL-T-27/127 -01	100 60 Hz (1-2)	42.4 CT (3-5) 7.78 (6-7)	100 mA (3-5) .225 (6-7)	175 (1-2) 37 (3-5) 14 (6-7)	1.75	5	130°C	See MIL-T-27/127
MIL-T-27/131 -01	108/120/132 400 Hz (1-2-3-4)	66 CT (5-7)	1.3	350 (1-4) 350 (5-7)	123	4	170°C	See MIL-T-27/131
MIL-T-27/134 -01	120 400 Hz (1-2)	28.6 (3-4)	.385	250	12	5	155°C	See MIL-T-27/134

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Supersedes page 101.33 of Notice 2

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/140 -01	115 60 Hz (1-2)	50 (3-4)	2	357	100	4	130°C	See MIL-T-27/140
MIL-T-27/153 -01	115,220 50/60 Hz (1-2-3)	6.3 CT (4-6)	2	535 (1-3) 1070 (4-6)	12.6	4	130°C	See MIL-T-27/153
MIL-T-27/155 -01	115 50/60 Hz (1-2)	20 CT (3-5)	.6	535	12	4	130°C	See MIL-T-27/155
MIL-T-27/156 -01	115 50/60 Hz (2-4), (1-4), (1-3), (2-3)	8.25 to 13.44	.105	535	4.8	4	130°C	See MIL-T-27/156
MIL-T-27/157 -01	115 50/60 Hz (2-4), (1-4), (1-3), (2-3)	20.25 (5-7) 20.25 (8-10)	.4 (5-7) .4 (8-10)	535	16	4	130°C	See MIL-T-27/157
MIL-T-27/180 -01	57.5/99.7/115 400 Hz (1-2-3-4)	12.6 (5-6) 12.6 CT (7-9)	2 (5-6) 2 (7-9)	535	51	4	130°C	See MIL-T-27/180
MIL-T-27/181 -01	115 60 Hz (1-2)	6.3 CT (3-5) 450 CT (6-8)	30 mA(6-8) 2 (3-5)	535	26.1	4	130°C	See MIL-T-27/181
MIL-T-27/210 -01	250 400 Hz (1-2)	1 (4-5)	.5	250	.5 SH	5	170°C	See MIL-T-27/210
MIL-T-27/211 -01	250 400 Hz (1-2)	30 (4-5)	.5	250	15 SH	5	170°C	See MIL-T-27/211

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/212 -01	250 400 Hz (1-2)	250 (4-5) 25 (6-7)	.2 (4-5) .01 (6-7)	250	50 SH	5	170°C	See MIL-T-27/212
MIL-T-27/220 -01	107 400 Hz (1-2)	49 CT (3-5) 6.35 (6-7)	.01 (3.5) 15.9 (6-7)	120	100	5	170°C	See MIL-T-27/220
MIL-T-27/221 -01	107 400 Hz (1-2)	49 CT (3-5) 5.3 (6-7) 10 (7-8)	.01 (3-5) 1.63 (6-7) .60 (7-8)	120	37	5	170°C	See MIL-T-27/221
MIL-T-27/222 -01	107 400 Hz (1-2)	49 CT (3-5) 5.68 (6-7)	.01 (3-5) 27.8 (6-7)	120	160	5	170°C	See MIL-T-27/222
MIL-T-27/223 -01	107 400 Hz (1-2)	49 CT (3-5) 5.57 (6-7)	.01 (3-5) 22.5 (5-7)	120	125	5	170°C	See MIL-T-27/223
-02	107 400 Hz (1-2)	49 CT (3-5) 5.55 (6-7) 8.45 (7-8)	.01 (3-5) 2.86 (6-7) 16.4 (7-8)	120	130	5	170°C	
MIL-T-27/224 -01	107 400 Hz (1-2)	49 CT (3-5) 5.76 (6-7) 8.24 (7-8)	.01 (3-5) 30 (6-7) 2.14 (7-8)	120	214	5	170°C	See MIL-T-27/224
MIL-T-27/225 -01	115 400 Hz (1-2)	37 CT (3-5)	.015	120	.6	5	170°C	See MIL-T-27/225

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/227 -01	115 400 Hz (1-2)	13.1 (3-4) 11.7 (5-6)	.1 (3-4) .05 (5-6)	115	1.9	5	170°C	See MIL-T-27/227
MIL-T-27/235 -01 -02 -03 -04 -05	115 50/60 Hz (1-2) ↓	115 (5-6) ↓	3.5 .435 1.04 1.4 8.7	175 ↓	400 50 120 160 1000	4 ↓	105°C ↓	See MIL-T-27/235
MIL-T-27/256 -01	115 400 Hz (1-3)	129.5 (4-5)	3.2	130	350	5	170°C	See MIL-T-27/256
MIL-T-27/268 -01	115 60 Hz (1-2)	115 (3-4)	1	165	115	4	155°C	See MIL-T-27/268
MIL-T-27/269 -01	115 400 Hz (1-2)	115 (3-4)	.5	165	57.5	5	155°C	See MIL-T-27/269
MIL-T-27/284 -01	115 400 Hz (1-2)	26 (3-4)	1 mA	127 (1-2) 27 (3-4)	.26	5	130°C	See MIL-T-27/284

Supersedes page 101.34
of Notice 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/300	105/115/125 60 Hz							
-01	(1-2-3-4)	2.5 (6-5)	3	175	7.5	4	105°C	See MIL-T-27/300
-02	↓	2.5 (6-5)	10	↓	25	↓	↓	↓
-03		2.5 (6-5)	10		25			
-04		5.0 (6-5)	3		15			
-05		5.0 (6-5)	10		50			
-06		5.0 (6-5)	10		50			
-07		6.3 (6-5)	2		12.6			
-08		6.3 (6-5)	5		31.5			
-09		6.3 (6-5)	10		63			
-10		6.3 (6-5)	20		126			

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Part no. and dash no.	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/167-23 1/	10K CT 12K CT	3.2 4.0	100 at 1 kHz	±3 dB (300 Hz to 20 kHz)	5	105°C	See figure for MIL-T-27/167-01 thru -22 on page 102-
MIL-T-27/167-24	10K split 25K split	200 split 500 split					
MIL-T-27/167-25	10K CT 25K CT	200 CT 500 CT					
MIL-T-27/167-26	10K 12K	500 CT 600 CT					
MIL-T-27/167-27	10K split 12K split	500 split 600 split					
MIL-T-27/167-28	10K CT	2K CT					
MIL-T-27/167-29	10K CT 12K CT	1500 CT 1800 CT					
MIL-T-27/167-30	10K CT 12K CT	10K CT 12K CT					
MIL-T-27/167-31	10K split 12K split	10K split 12K split					
MIL-T-27/167-32	10K	90K	30 at 1 kHz				
MIL-T-27/167-33	20K 30K	800 1200	100 at 1 kHz				
MIL-T-27/167-34	20K CT 30K CT	800 CT 1200 CT					
MIL-T-27/167-35	30K	50					
MIL-T-27/167-36	40K CT 50K CT	400 split 500 split					
MIL-T-27/167-37	40K split 50K split	400 split 500 split					
MIL-T-27/167-38	100K	60					
MIL-T-27/167-39	100K CT 200K CT	100 split 200 split	5 at 1 kHz				
MIL-T-27/167-40	200K	1K					
MIL-T-27/167-41	200K CT	1K CT					
MIL-T-27/167-42	200K CT	1K split					

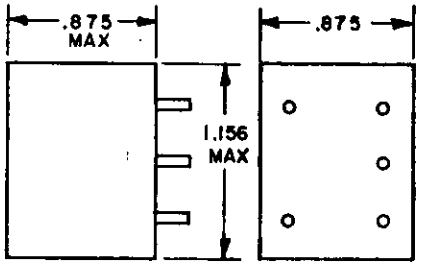

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Reprinted without change

MIL-STD-1286C
NOTICE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Supersedes page 102.12 of Notice 2

Part no. and dash no.	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/170-01	600	1200	1	±1 dB (300 Hz to 3.4 kHz)	5	105°C	
MIL-T-27/172-01 1/	80 CT 100 CT	32 split 40 split	600 at 1 kHz	±3 dB (300 Hz to 100 kHz)			
MIL-T-27/172-02	120 CT 150 CT	3.2 4.0	500 at 1 kHz				
MIL-T-27/172-03	150 CT 200 CT	12 16					
MIL-T-27/172-04	300 CT 400 CT	12 16					
MIL-T-27/172-05	300 CT	600	600 at 1 kHz				
MIL-T-27/172-06	320 CT 400 CT	3.2 4.0	500 at 1 kHz				
MIL-T-27/172-07	400 CT 500 CT	40 split 50 split					
MIL-T-27/172-08	400 CT 500 CT	120 split 150 split	600 at 1 kHz				
MIL-T-27/172-09	400 CT 500 CT	400 split 500 split					
MIL-T-27/172-10	400 CT 500 CT	4K CT 5K CT					
MIL-T-27/172-11	500 600	50 60					
MIL-T-27/172-12	500 CT	600					
MIL-T-27/172-13	600	3.2	100 at 1 kHz				

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

*U.S. GOVERNMENT PRINTING OFFICE: 1985-605-036/24952

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.