[INCH-POUND]

A-A-55762
13 September 1995
SUPERSEDING
ZZ-R-765/18A
11 April 1991

COMMERCIAL ITEM DESCRIPTION

RUBBER, SILICONE; STRIP, SHAPE 18

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for ZZ-R-765/18A, which is cancelled

1. SCOPE. This description covers a silicone rubber strip of various classes and grades.

2. CLASSIFICATION. The silicone rubber shall be of the following classes and grades as specified. The designated grade number corresponds to the nominal Shore Durometer A hardness value.

Class 1A - Low temperature resistant
Grade - 40, 50, 60, 70 and 80

Class 1B - Low temperature resistant and low compression set at high temperature
Grade - 40, 50, 60, 70 and 80

Class 2A - High temperature resistant
Grade - 25, 40, 50, 60, 70 and 80

Class 2B - High temperature resistant and low compression set
Grade - 25, 40, 50, 60, 70 and 80

Class 3A - Low temperature, tear and flex resistant
Grade - 30, 50 and 60

Class 3B - Tear and flex resistant
Grade - 30, 50, 60, 70 and 80

3 SALIENT CHARACTERISTICS

3.1 Dimensional and physical requirements. Dimensional and physical requirements shall conform to Figure 1. Dimensional tolerances shall conform to the applicable commercial tolerances specified in ZZ-R-765.

3.2 Material. Material shall be silicone rubber formulated and processed to meet the physical and mechanical properties specified in Table I of ZZ-R-765, when tested in accordance with the ASTM test method specified in Table IX of ZZ-R-765.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to Defense General Supply Center (DGSC), Attn DGSC-VCA, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 9320

Distribution Statement A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3.3 Color. Unless otherwise specified, the color of the silicone rubber shall be the natural color of the compound furnished

3.4 Workmanship. The end product shall be clean, smooth finished, and free from dirt, flash or rough edges.

3.5 Marking Unless otherwise specified (see ordering data), sheet material and strips (cut from sheet) shall be marked with the following information: Commercial Item Description number, class, grade, designations, and the supplier's designations The class and grade designations separated by a dash, shall be enclosed within parentheses. The markings shall be legible and placed in rows of constantly recurring symbols from one end of the sheet to the other, spaced approximately 5 inches apart. The supplier's designation (compound number) shall appear immediately below the constantly recurring description symbols The symbols shall be legible and shall be not less than 3/8 inches high. The symbols shall be applied by suitable means, using a black colored marking fluid to mark white colored silicones and a white colored marking fluid to mark other than white colored silicones The marking shall not be obliterated by normal handling or by the action of petroleum-based oils.

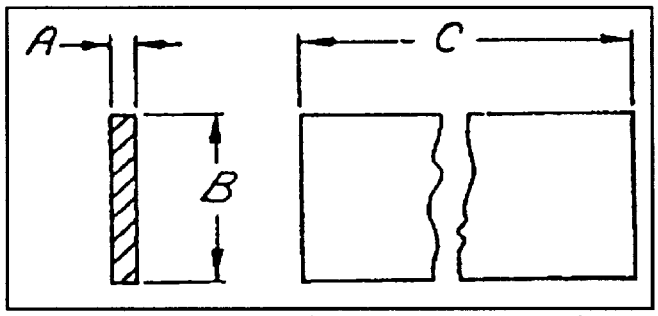


Figure 1 Dimensional and Physical Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Figure 1 continued

PART NO. AAXXX18-	A WIDTH	B HEIGHT	C LENGTH	NHR MIN MAX	MIN TENSILE STRENGTH P.S.I.	TEMP. RATING OF
001C5	0 015	0 400	9 8	45 0 - 55 0	700	-80 to 425
002D7	0 032	1 500	15 0	65 0 - 75 0	650	-80 to 425
003A5	0 031	2 000	3 0	45 0 - 55 0	700	-100 to 425
004C6	0 031	2 000	6 0	55 0 - 65 0	650	-80 to 425
005C5	0 047	0 750	25 0	45 0 - 55 0	700	-80 to 425
006C5	0 047	0 750	27 0	45 0 - 55 0	700	-80 to 425
007C5	0 047	0 750	73 0	45 0 - 55 0	700	-80 to 425
008C5	0 047	0.750	130 0	45 0 - 55 0	700	-80 to 425
009C5	0 750	0.750	198.0	45 0 - 55.0	700	-80 to 425
010C5	0 062	1 500	144 0	45 0 - 55 0	700	-80 to 425
011D4	0 062	3 000	6 0	35 0 - 45 0	700	-100 to 425
012C5	0 062	4 000	72 5	45 0 - 55 0	700	-80 to 425
*013B	0 090	0 500	1 5	35 0 - 75 0	600	-100 to 425
014A4	0 090	0 880	1 6	35 0 - 45.0	700	-100 to 425
015C5	0 090	1.880	13 5	45 0 - 55 0	700	-80 to 425
016D5	0 093	0 250	A/A	45 0 - 55 0	700	-80 to 425
017A4	0 125	0 550	6 6	35 0 - 55 0	700	-100 to 425
018C5	0 125	0 500	19 0	45 0 - 55 0	700	-80 to 425
019D4	0 125	0 500	54 3	35 0 - 45 0	700	-80 to 425
020D4	0 125	1.000	56 6	35 0 - 45.0	700	-80 to 425
021D4	0 125	1 000	63 3	35 0 - 45 0	700	-80 to 425
022C5	0 125	1 062	144 0	45 0 - 55 0	700	-80 to 425
023F3	0 250	0 500	66 0	25 0 - 35 0	1000	-94 to 400
**024C8	0 250	0.910	10.2	75.0 - 85 0	500	-100 to 425
025C5	0.250	2 000	34.2	45 0 - 55 0	700	-80 to 425
026D6	0.250	5 000	80 3	55.0 - 65 0	650	-80 to 425
027C5	0.375	0 625	A/A	45.0 - 55 0	700	-80 to 425
028C5	0 375	1 250	25.3	45 0 - 55.0	700	-80 to 425
029D4	0 375	2 000	14 3	35 0 - 45.0	700	-80 to 425
030B5	0 562	0 562	144 0	45 0 - 55 0	700	-100 to 425
031E5	0 750	0 250	72 0	45 0 - 55 0	1200	-100 to 425
032E3	0 750	5.000	1200 0	20 0 - 35 0	850	-130 to 400
034F6	4 000	0 063	8 0	55 0 - 65 0	1200	-94 to 400
035B5	0 730	0 078	5 7	45 0 - 55 0	700	-100 to 425
***036F3	0 080	0 375	180 0	25 0 - 35 0	1000	-94 to 400

* Grades 40 to 70 acceptable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

** Special Features 0.120 in X 45° chamfer on 4 corners
*** Unless otherwise specified, color should be gray.

NOTES. 1. Dimensions are in inches.
2. NHR: Nonmetallic hardness rating, Shore Durometer A.
3. Minimum tensile strength in pounds per square inch.
4. Surface condition: Smooth both sides
5 A/A Any acceptable

4. REGULATORY REQUIREMENTS

4.1 Recovered materials The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5 QUALITY ASSURANCE PROVISIONS


5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of the Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Market acceptability. The item offered must have been sold to the Government or commercial market and reflect demonstrated reliability and serviceability.

6. PRESERVATION, PACKAGING, PACKING AND MARKING. Preservation, packaging, packing and marking for shipment shall be in accordance with American Society for Testing and Materials (ASTM) D 3951 or as specified in the contract or order.

7. NOTES

7.1 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows:

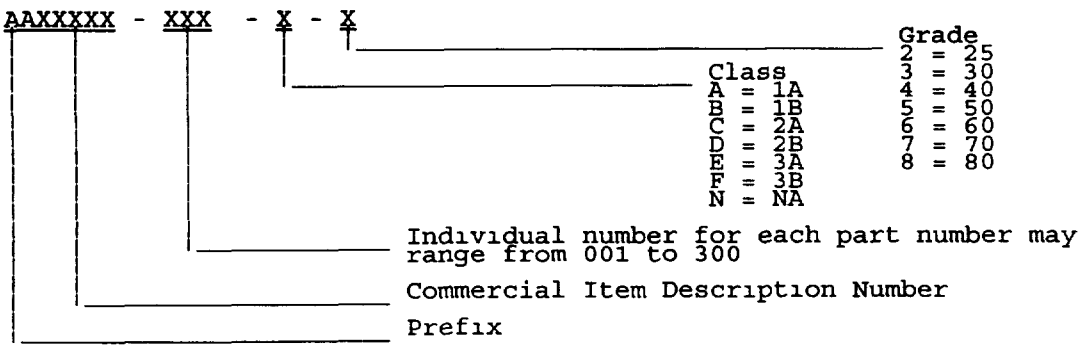

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

7.2 Addresses for obtaining reference documents

SAE

SAE
400 Commonwealth Drive
Warrendale PA 15096-0001

ASTM

American Society for Testing and Materials
1916 Race Street
Philadelphia PA 19103

7.3 Ordering data

a) Title, number, and date of this description.
b) Class and grade required.
c) Length.
d) Color required if other than natural color of compound furnished.
e) Marking if different (see 3.5).
f) Specify any special packaging requirements.
g) Specify any additional quality assurance provisions, deemed necessary, covered by ZZ-R-765.
h) Contracting officer may request proof of certification of commercial item prior to first contract delivery.

7.4 Utilization caution. Use of this material in items that may come in contact with human skin, food, or potable water is not recommended without prior approval of the appropriate medical service

MILITARY INTEREST.

CUSTODIANS:
Army - MR
Navy - AS
Air Force - 11

CIVIL AGENCY COORDINATING ACTIVITY

GSA - FSS

PREPARING ACTIVITY:

DLA - GS

(Project No · 9320-1125)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.