INCH-POUND

MIL-M-49241A(CR)
AMENDMENT 1
2 October 1992

MILITARY SPECIFICATION
MULTIPLEXER, TD-1236/G

This specification is approved for use by the Communications- Electronic Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 7

3.7.1.10, Line 6: Delete "± 3 1/2%" and substitute "7.6 nsec".

PAGE 23

Table IV (Notes): Delete current note e. and substitute with " ** indicates one time only first article test not to be performed during Group c production lot testing."

PAGE 25

Table V: Add "3.14" under requirement paragraph column for each assembly listed as part of the Visual-Mechanical Inspection.

PAGE 34

Tables are provided for the MD-1026(P)/G & TD-1234(P)/TTC Interface Connections.

AMSC No. N/A FSC 5820
DISTRIBUTION STATEMENTN A. Approved for release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:57Z
Check the source to verify that this is the current version before use.

PAGE 45

4.7.4.3e, Line 3: Delete "CCA A7" and substitute "CCA A10".

PAGE 47

4.7.4.6d, Last sentence: Delete and substitute "The interval shall be greater than 8.33 sec."

PAGE 53

4.8.7.1: Delete and substitute with the following:

"4.8.7.1 Vibration - The equipment shall be subjected to test of MIL-STD-810C, Method 514.2, Procedure X (Curve AW), Part II, as specified below. Perform a Unit Performance Electrical Test and Visual Inspection.

Vibration in each of the three (3) principal axes shall be performed in the following sequence.

Install the unit equipment mounting brackets on the UUT and install the unit on the vibration exciter in the vertical axis (top to bottom). Install the control accelerometers on the vibration fixture.

SINUSOIDAL VIBRATION PROFILE

TEST LEVEL:	1.5g
FREQUENCY RANGE:	5.0 Hz to 200 Hz to 5.0 Hz
SWEEP RATE:	5.0 Hz to 200 Hz to 5.0 Hz in (12) twelve minutes
TIME DURATION:	84 Minutes per axis

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:57Z
Check the source to verify that this is the current version before use.

Subject the unit to the vibration levels specified in the vibration profile from 5Hz to 200 Hz over a period of six (6) minutes, while monitoring the control accelerometer(s). Verify that the monitored response of the control accelerometer(s) is within 10 percent of the specified 1.5g input thru the entire frequency range of 5.0 Hz to 200 Hz.

Cycle the unit in accordance with the vibration profile. Vary the frequency at the sinusoidal rate from 5.0 Hz to 200 Hz to 5.0 Hz within twelve (12) minutes. (This constitutes one (1) cycle.) Subject the unit to 7 cycles of vibration for a total test time of 84 minutes. (This includes the six (6) minutes recorded previously).

Repeat Steps with the unit oriented in side-to-side and front-to-back axes.

Perform a Unit Electrical Performance Test and Visual Inspection.

PAGE 79

Delete Figure 18 and substitute with the accompaying figure.

PREPARING ACTIVITY:
Army-CR
Project 5820-A948

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:57Z
Check the source to verify that this is the current version before use.

Table XIII TD-1234 Interface Connections

Connector	Function	PIN LO	PIN HI	PIN GROUND	Signal Type
High Group	Data In		*(M)		Diphase
	Data Out		*(F)		Diphase
Low Group	Data In		*(M)		Diphase
	Data Out		*(F)		Diphase
Channel 1-8	Data In Ch 1	B	b	L,q	Diphase
	Data Out Ch 1	F	x		Diphase
	Data In Ch 2	C	c		Diphase
	Data Out Ch 2	G	Y		Diphase
	Data In Ch 3	D	J		Diphase
	Data Out Ch 3	H	Z		Diphase
	Data In Ch 4	K	a		Diphase
	Data Out Ch 4	E	d		Diphase
	Data In Ch 5	T	e		Diphase
	Data Out Ch 5	M	h		Diphase
	Data In Ch 6	f	i		Diphase
	Data Out Ch 6	N	u		Diphase
	Data In Ch 7	R	j		Diphase
	Data Out Ch 7	P	v		Diphase
	Data In Ch 8	A	S		Diphase
	Data Out Ch 8	W	g		Diphase
Station Lock and Alarm	Station Clock In	A	B	C	Square Wave
	Alarm S	D	E	H	Alm-Close Contact
	Alarm SA	F	G		Alm-Close Contact
Power	Low (-) High (+)	C	A	B	
Order Wire Low Group	AVOW In	A	B	C	
	AVOW Out	D	E		
	AVOW Control	F	G		Note 1
Order Wire High Group	AVOW In	A	B	C	
	AVOW Out	D	E		
	AVOW Control	F	G		Note 1

NOTE 1. These pins connected together by COU cable.

* (M) Male, (F) Female; Type determined by center conductor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

Table XIV MD-1026 Interface Connections

Connector	Function	LO	HI	GND	Signal Type
LINE SIG IN 1	Line Data In #1	-	-	-	
LINE SIG OUT 1	Line Data Out #1	-	-	-	
LINE SIG IN 2	Line Data In #2	-	-	-	
LINE SIG OUT 2	Line Data Out #2	-	-	-	
LINE SIG IN 3	Line Data In #3	-	-	-	
LINE SIG OUT 3	Line Data Out #3	-	-	-	
LINE SIG IN 4	Line Data In #4	-	-	-	
LINE SIG OUT 4	Line Data Out #4	-	-	-	
LINE SIG IN 5	Line Data In #5	-	-	-	
LINE SIG OUT 5	Line Data Out #5	-	-	-	
GROUP 1	Group Data In	B	A	M	NRZ
GROUP 2	Group Tim in	D	C	N	SQ WV
GROUP 3	Group Data out	F	E	P	NRZ
GROUP 4	Group Tim out	H	G	R	SQ WV
	BLACK Sta Clk out	K	J	S	SQ WV
ANALOG VOICE ORDERWIRE	Gr 1 AVOW in	B	A		Analog
	out	D	C		Analog
	Gr 2 AVOW in	F	E		Analog
	out	H	G	T,U	Analog
	Gr 3 AVOW in	K	J		Analog
	out	M	L		Analog
	Gr 4 AVOW in	P	N		Analog
	out	S	R		Analog
POWER		A	C	B	

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:57Z
Check the source to verify that this is the current version before use.

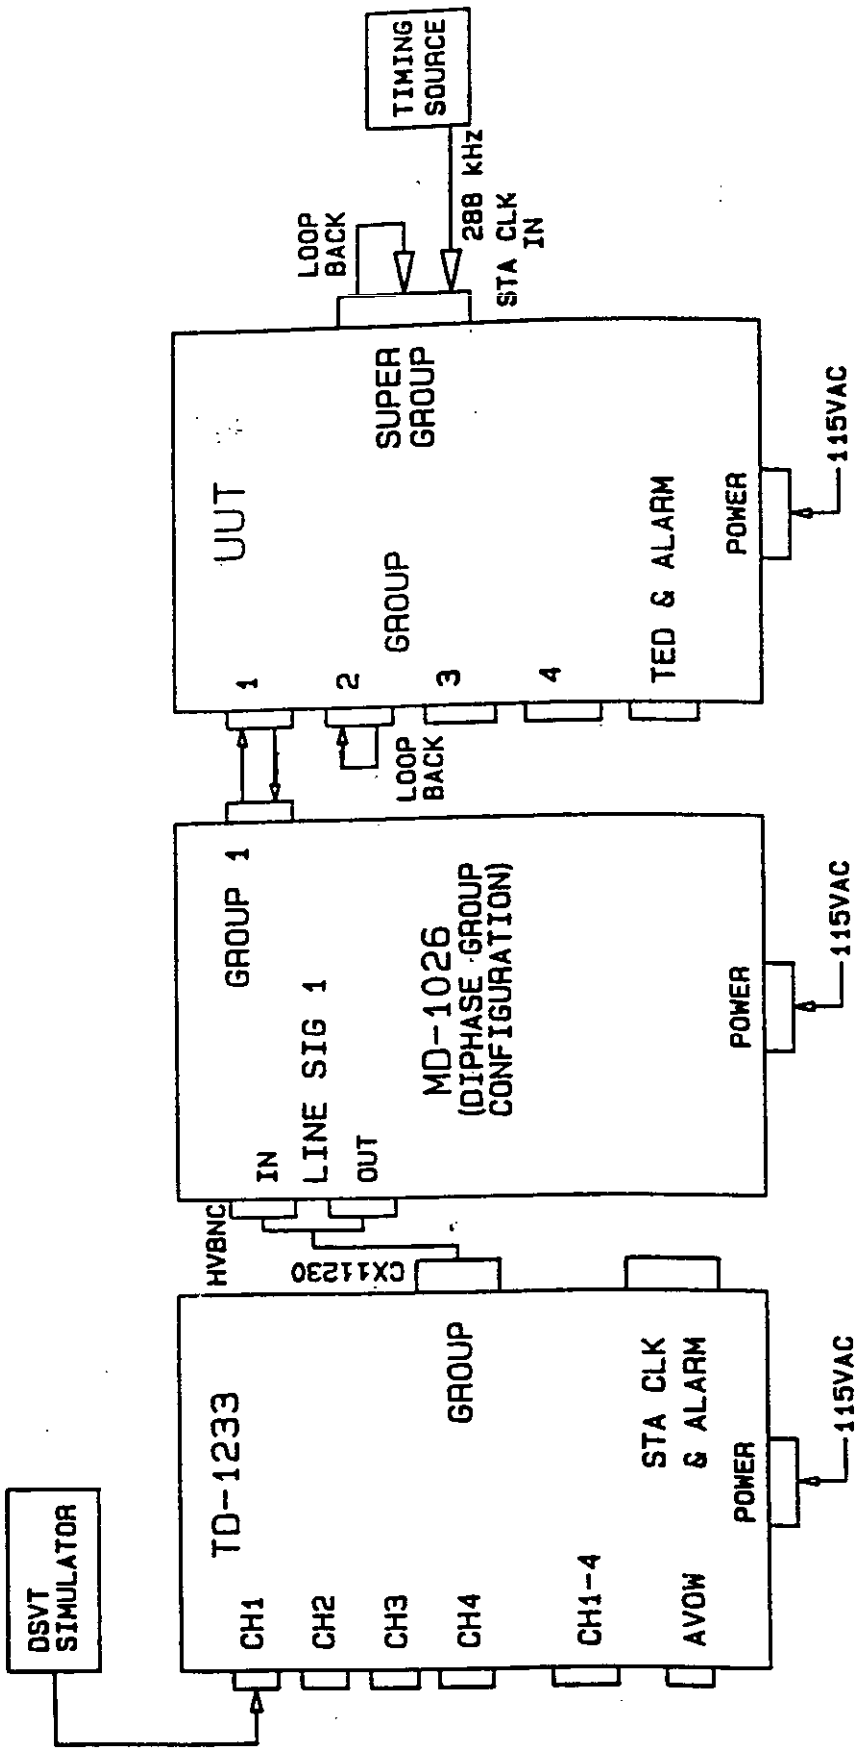


FIGURE 18. False frame lock.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:57Z
Check the source to verify that this is the current version before use.