MIL-C-17/34B
9 October 1979
SUPERSEDING
MIL-C-17/34A
28 February 1974

MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL, TIME DELAY,
950 OHMS, M17/34-RG65

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cables described herein shall consist of this document and the latest issue of Specification MIL-C-17.

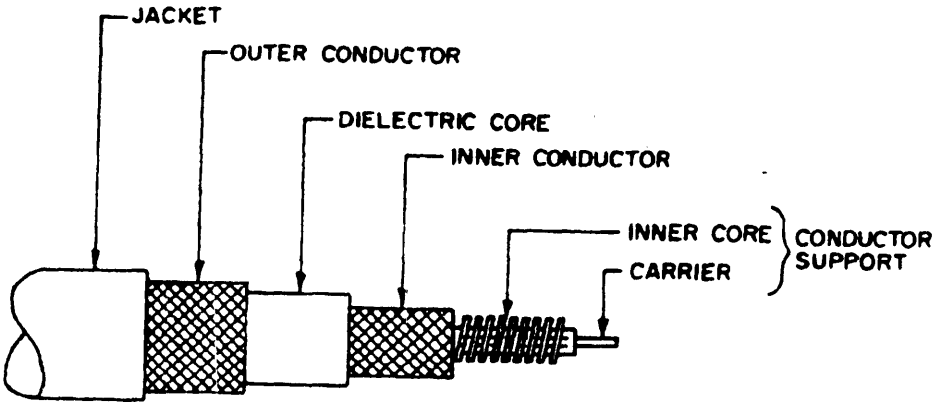


FIGURE 1. Configuration.

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:01Z
Check the source to verify that this is the current version before use.

TABLE I. Description.

Components	Construction details
Conductor support Carrier Inner core	Nonconductive support. Type A-1: Solid polyethylene. Diameter: .110 inch ±.010.
Inner conductor	Solid, magnet wire, per J-W-1177 wound in a helix over the conductor support. Diameter of magnet wire: .008 inch ±.001 Diameter over helix: .128 inch, nominal.
Dielectric core	Type A-1: Solid polyethylene. Diameter: .285 inch ±.010.
Outer conductor	Single braid of AWG #33, bare, copper wire. Diameter: .340 inch, maximum. Coverage: 94.9%, nominal Carriers: 24 Ends: 8 Picks/inch: 6.5 ±10%
Jacket	Type IIa Diameter: .405 inch ±.010.

Engineering information:

Continuous working voltage: 1,000 Vrms, maximum.
Operating frequency: 5 MHz, maximum.
Operating temperature range: -40° to +80°C.
Engineering notes: This cable useful in time delay applications (NATO preferred type NWR-8).

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:
Aging stability: +98° ±2°C.
Stress crack resistance: Not applicable.
Outer conductor integrity: Not applicable.
Cold bend: -40° ±2°C.
Dimension stability: Not applicable.
Contamination: Not applicable.
Bendability: Not applicable.
Flammability: Not applicable.
Weight: 11 pounds per 100 feet, maximum.

Electrical:
Spark test: 5,000 Vrms +25%, -0%.
Voltage withstanding: 3,000 Vrms, minimum.
Insulation resistance: Not applicable.
Corona extinction voltage: 1,500 Vrms, minimum.
Characteristic impedance: 950 ohms ±50.
Attenuation: 16 dB per 100 feet maximum at 5 MHz.
Structural return loss: Not applicable.
Capacitance: 48 pF per foot, maximum.
Capacitance unbalance: Not applicable.
Transmission unbalance: Not applicable.
Mechanically induced noise voltage: Not applicable.
Time delay: 0.15 microseconds per foot, maximum.

Part number: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:01Z
Check the source to verify that this is the current version before use.

Supersession data: See table II.

TABLE II. Cross reference of part number.

Part number	Superseded part number or type designation
M17/34-RG65	RG65A/U

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - ME, AT, AR
Navy - AS, OS, MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 6145-0716-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:01Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:01Z
Check the source to verify that this is the current version before use.