MIL-C-17/56B
24 August 1983
SUPERSEDING
MIL-C-17/56A
9 October 1979

MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, TWIN, 95 OHMS,
M17/56-RG130, (UNARMORED), M17/56-RG131 (ARMORED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cables described herein shall consist of this specification and the latest issue of MIL-C-17.

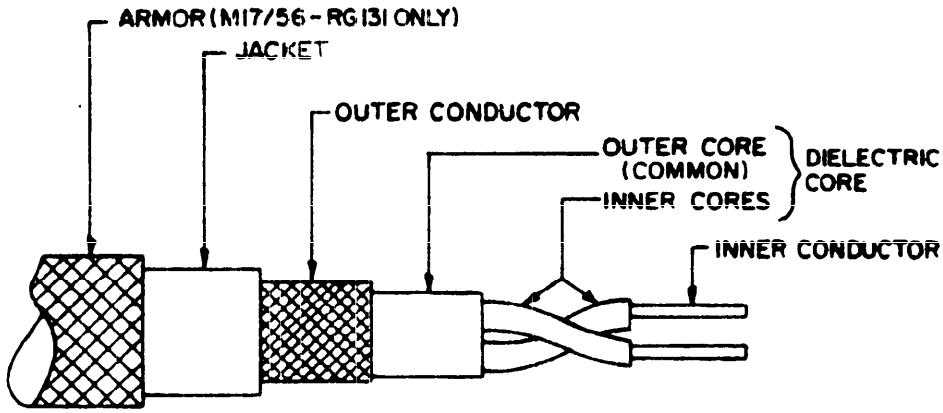


FIGURE 1. Configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

FSC 6145

TABLE I. Description.

Components	Construction details
Inner conductors	Two conductors. Seven strands of bare, copper wire, each strand .0285 inch in diameter. Overall diameter of each conductor: .0855 inch ±.0010.
Dielectric core Inner cores (Individual)	Two individual cores under a common core. Two cores, twisted together with a right-hand lay of 4±1/4 inches. Type A-2: Solid polyethylene, talc-coated, each core. Diameter of each inner core: .188 inch ±.005. Conductor eccentricity 10% maximum.
Outer core (Common)	Type A-1: Solid polyethylene, filled-to-round. Diameter: .472 inch ±.015.
Outer conductor	Single braid of AWG #30, tinned, copper wire. Diameter: .540 inch, maximum. Coverage: 94.0%, nominal Carriers: 24 Ends: 8 Picks/inch: 6.3% ±10%
Jacket	Type IIa Diameter: .625 inch ±.015.
Armor M17/56-RG131 (only)	Single braid of aluminum-alloy wire. Diameter: .710 inch maximum

Engineering information:

Continuous working voltage: 1,000 V rms maximum.

Operating frequency: 200 MHz maximum.

Velocity of propagation: 65.9 percent nominal.

Power rating: See figure 2.

Operating temperature range: -40°C to +85°C.

Inner conductor properties:

DC resistance (maximum at 20°C): .214 ohms per 100 feet.
Elongation: 25 percent minimum.

Engineering notes: This cable useful in balanced cable applications (see connector per MIL-C-3655).

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:

Eccentricity: 10 percent maximum 1/.

1/ $(T_{MAX}-T_{MIN})$ shall be interpreted as the difference in total wall thickness measured (1) along a line through the centers of the conductors between the edge of each conductor and the nearest surface of the core and (2) between a line tangent to the two conductors and a parallel line tangent to the surface of the core on both sides of the conductors. The eccentricity corresponding to the larger value of $(T_{MAX}-T_{MIN})$ shall be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

Adhesion of conductors:

Inner conductor to core: 13 pounds minimum, 130 pounds maximum.

Aging stability: +98°C ±2°C.

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

Cold bend: -40°C ±2°C.

Dimensional stability:

Inner conductor from core: .200 inch maximum.
Inner conductor from jacket: .400 inch maximum.

Bendability: Not applicable.

Weight: 30 pounds per 100 feet maximum (M17/56-RG130).
40 pounds per 100 feet maximum (M17/56-RG131).

Electrical:

Continuity: Applicable.

Spark test: 8,000 V rms +25 percent, -0 percent.

Voltage withstanding: 3,000 V rms.

Insulation resistance: Not applicable.

Corona extinction voltage: Not applicable.

Characteristic impedance: 95 ohms ±5.

Attenuation: 8.8 dB per 100 feet maximum at 400 MHz.

Structural return loss: Not applicable.

Capacitance: 19 pF per foot maximum.

Capacitance unbalance: 5 percent.

Transmission unbalance: 10 percent maximum, over 100-160 MHz frequency range.

Phase stability: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Part number: See table II.

Supersession data: See table II.

TABLE II. Cross reference of part number.

Part number	Superseded part number or type designation
M17/56-RG130	RG130/U
M17/56-RG131	RG131/U per MIL-C-17/57

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

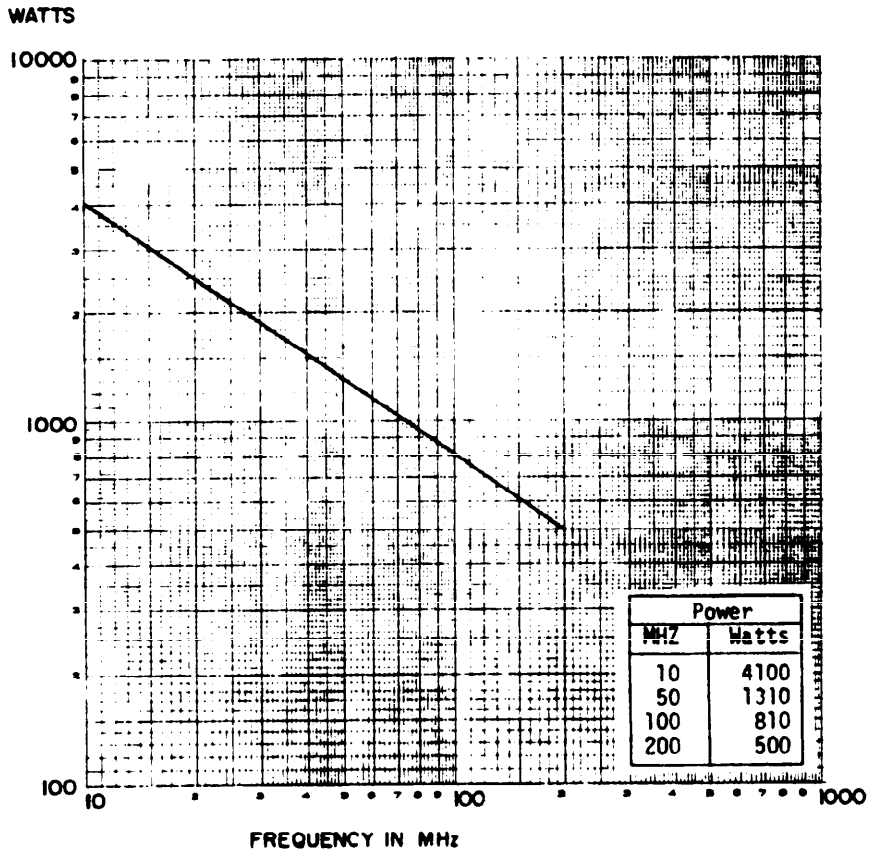


FIGURE 2. Power rating at 25°C sea level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19

Agent
DLA - ES

Preparing activity:
Army - CR

(Project 6145-0868)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications- Electronics command
ATTN: DRSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-17/56B	CABLES, RF, FLEX, TWIN, 95 OHMS MIL-C-17/56-RG130 (UNARMORED)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.