MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL,
50 OHMS, M17/060-RG142

This amendment forms a part of Military Specification Sheet MIL-C-17/60C, dated 15 March 1977, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* Title: Delete "M17/060-RG142" and substitute "M17/60-RG142".

PAGE 2

REQUIREMENTS, Stress-crack resistance: Add the following,

"Mandrel size; seven times the jacket diameter".

Dimensional stability, delete and substitute:

Inner conductor from core: 0.250 inch, maximum.

Inner conductor from jacket: 0.312 inch, maximum.

* Delete "Part number: See table II." and substitute "Part number: M17/60-RG142".

* Delete "Supersession data: See table II."

* TABLE II: Delete.

PAGES 3 AND 4

Delete and substitute figures 2 and 3 as printed on pages 2 and 3 of this amendment.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AT, ME
Navy - AS, MC, OS
Air Force - 19


Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 6145-0828-4)

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

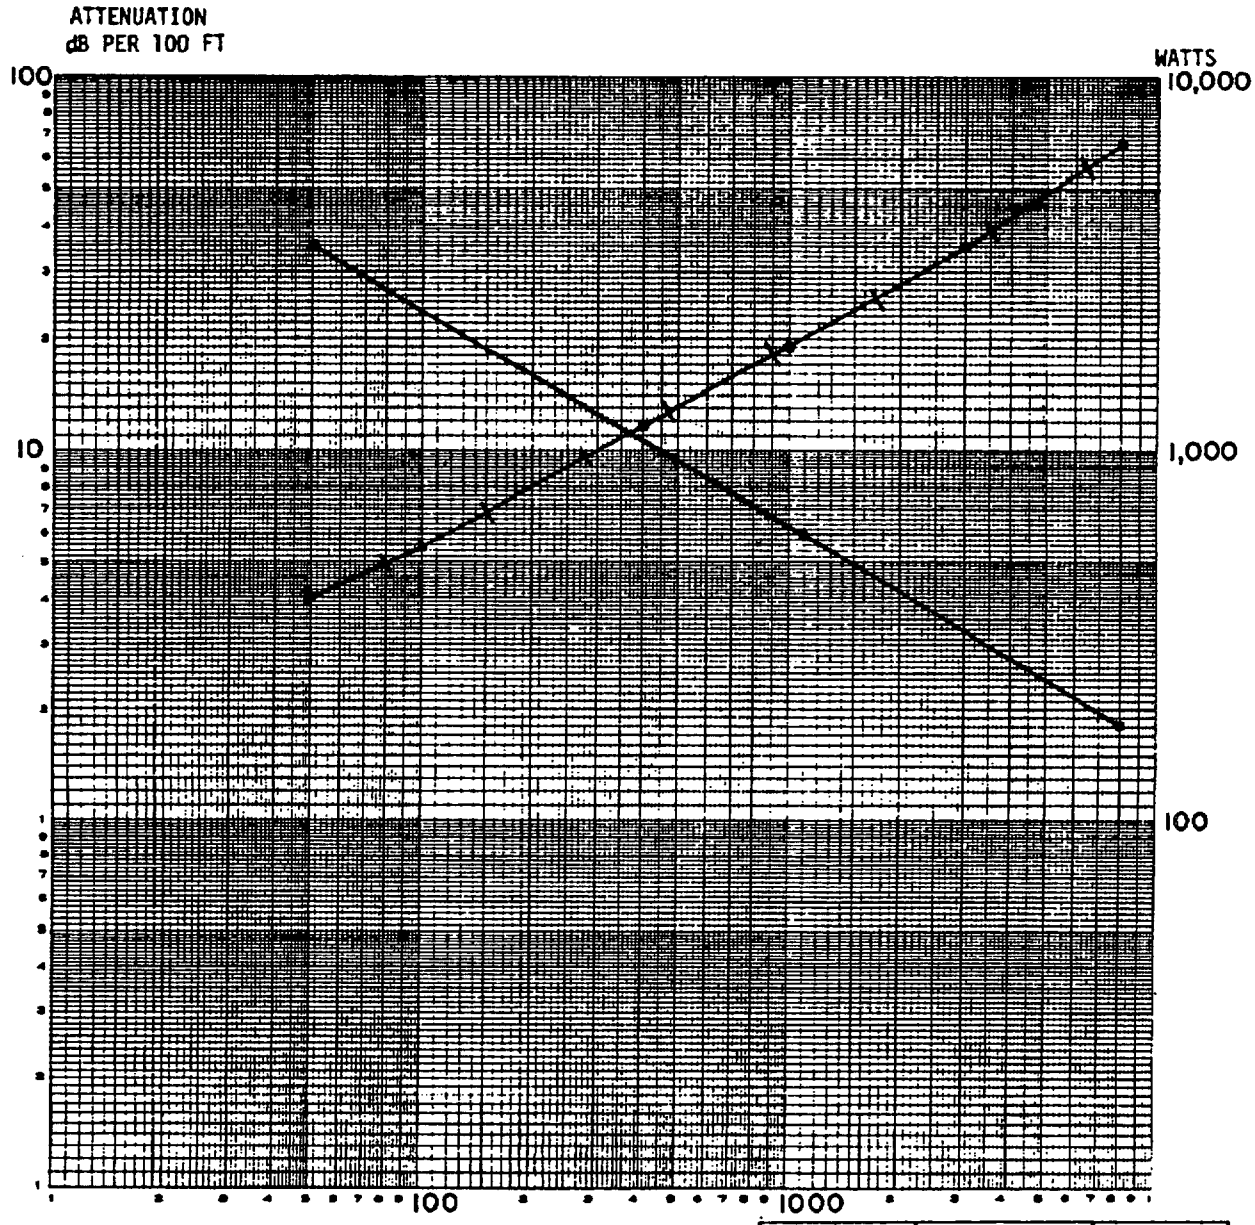

Tabulated values are for reference only.
The values on the chart represent the requirements.


Maximum attenuation at 25°C, sea level

Maximum power at 25°C, sea level

FREQUENCY MHz	ATTENUATION dB	POWER WATTS
50	4	3500
100	5.5	2400
400	11.7	1100
1000	19	650
3000	35	330
8000	66	180

FIGURE 2. Power rating and attenuation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.

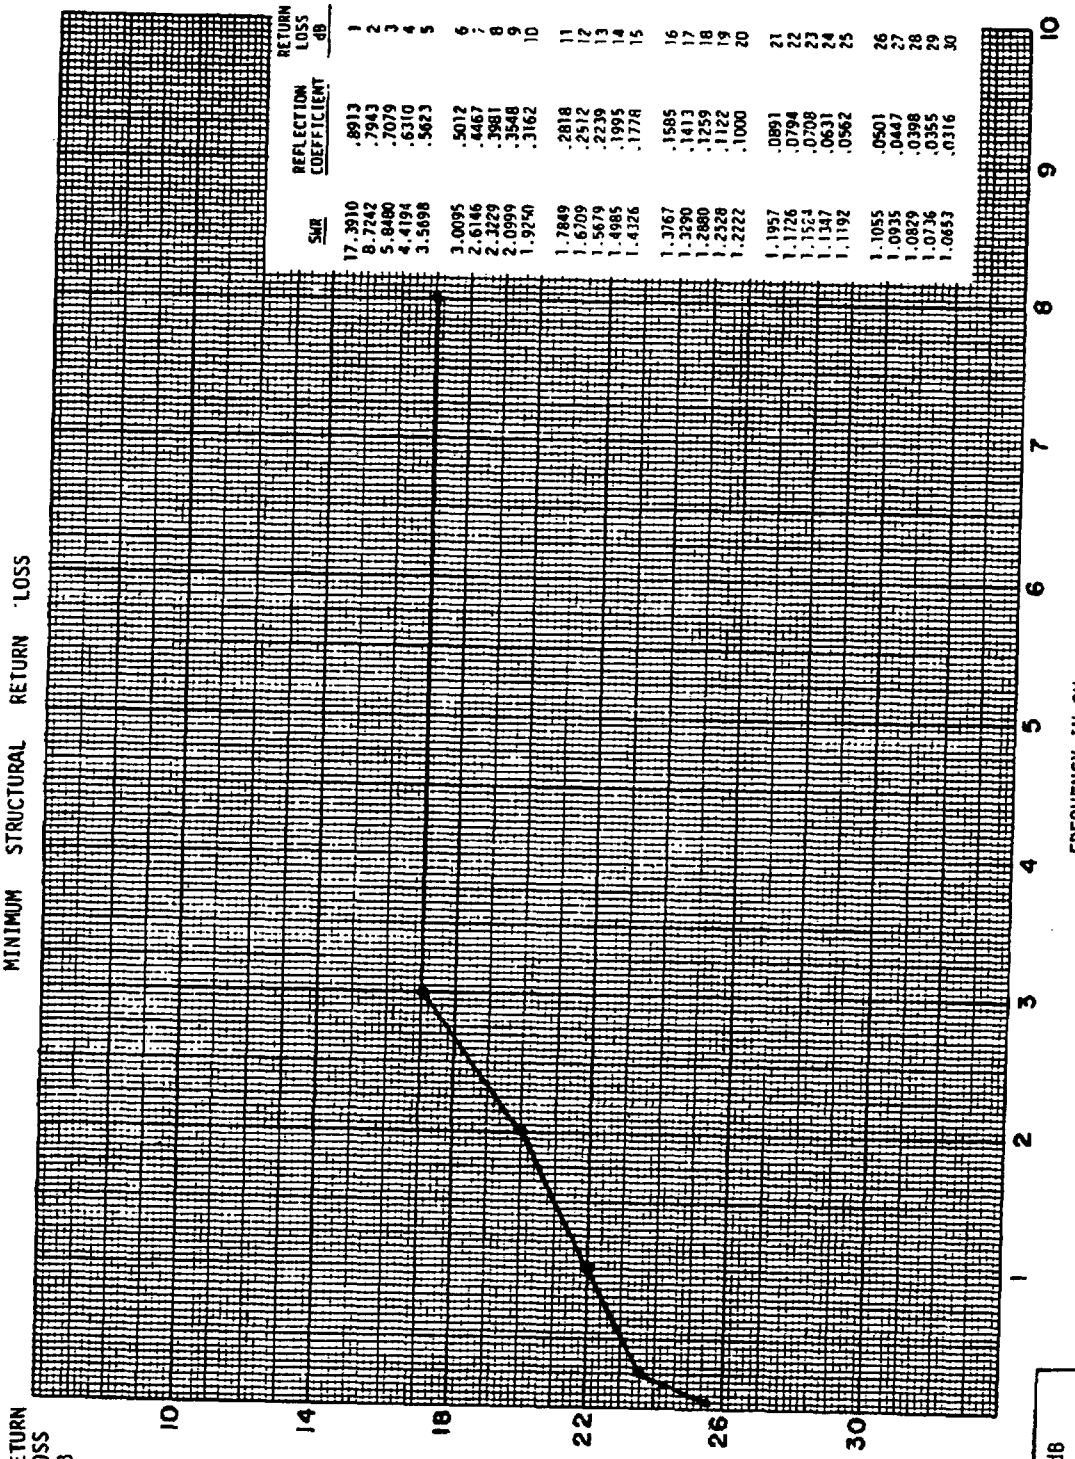

SWR	REFLECTION COEFFICIENT	RETURN LOSS dB
17.3910	.8913	1
8.7242	.7943	2
5.8480	.7079	3
4.4194	.6310	4
3.5698	.5623	5
3.0095	.5012	6
2.6146	.4467	7
2.3229	.3981	8
2.0999	.3548	9
1.9240	.3162	10
1.7849	.2818	11
1.6709	.2512	12
1.5679	.2239	13
1.4985	.1995	14
1.4326	.1778	15
1.3767	.1585	16
1.3290	.1413	17
1.2880	.1259	18
1.2328	.1122	19
1.2222	.1000	20
1.1957	.0891	21
1.1726	.0794	22
1.1524	.0708	23
1.1347	.0631	24
1.1192	.0562	25
1.1055	.0501	26
1.0935	.0447	27
1.0829	.0398	28
1.0736	.0355	29
1.0653	.0316	30

MHz	dB
50	25.5
400	23.8
1000	22
2000	20
3000	17
8000	17

Tabulated values are for reference only. The values on the chart represent the requirements.

FIGURE 3. Structural return loss.

☆U.S. GOVERNMENT PRINTING OFFICE: 1982-505-022/1461

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:03Z
Check the source to verify that this is the current version before use.