
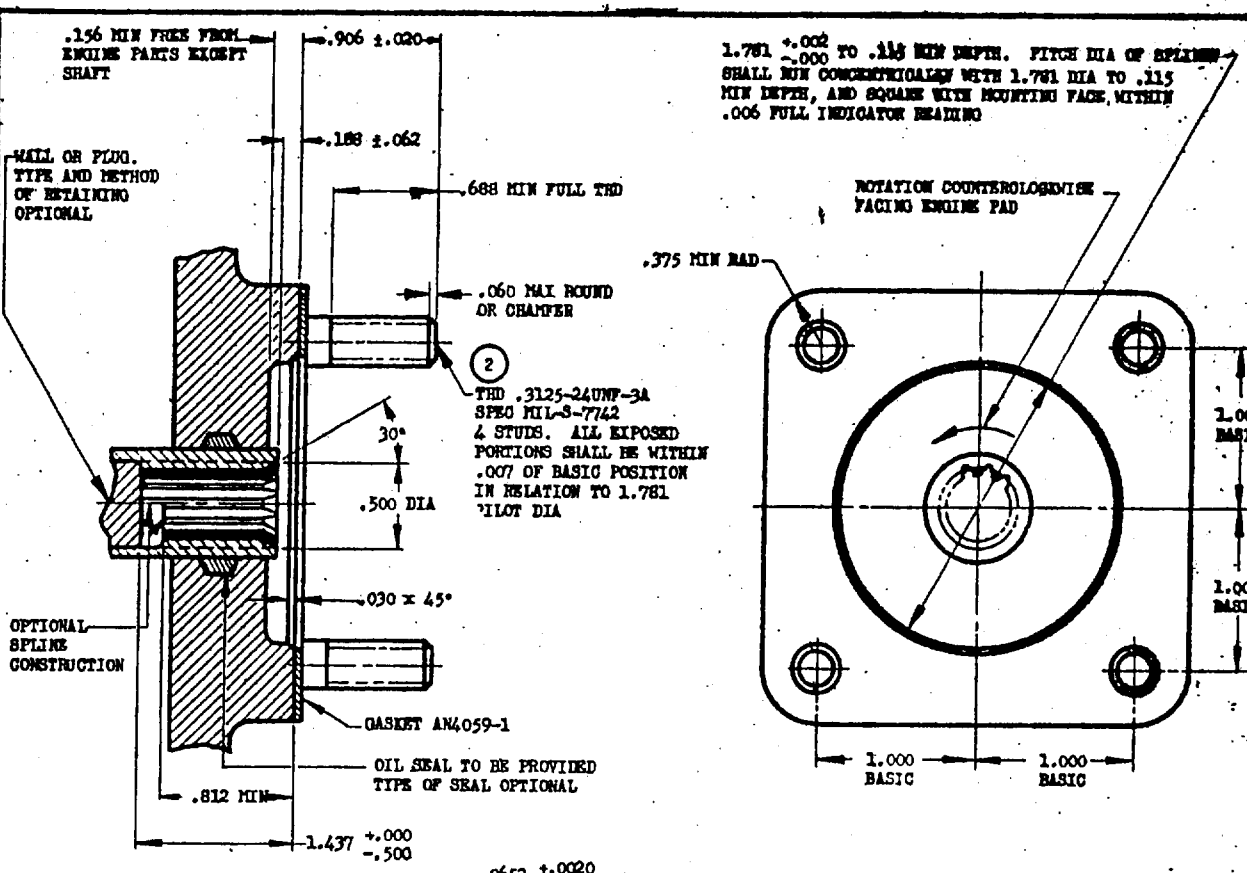


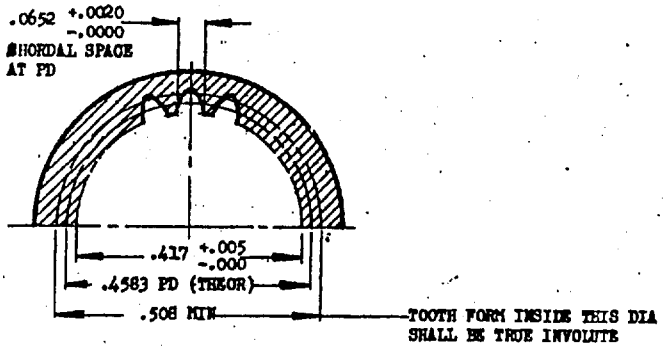

SPLINE DETAIL

(2) SPLINE DATA:
11 TEETH
24/48 PITCH
30° PRESSURE ANGLE
SURFACE HARDNESS
ROCKWELL C58 MIN.
MIN DEPTH OF EFFECTIVE CASE .010

TYPE	TORQUE, LB - IN.		ENGINE DISPLACEMENT CU IN.
	T_o	T_s	
XIII-A	25	450	4000 AND LESS
XIII-B	50	600	OVER 4000

PAD OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT.

THE OIL LEAKAGE OUT OF THIS DRIVE SHALL NOT EXCEED 2CC PER HOUR.

(2) ACCESSORY CLEARANCE SHALL BE PROVIDED IN ACCORDANCE WITH MANUFACTURER'S MODEL SPECIFICATION.

STRENGTH: SHALL BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (T_o) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND STATIC TORQUE (T_s) WITHOUT FAILURE OR PERMANENT DEFORMATION.

SPEED: DRIVE SHAFT SPEED AT NORMAL RATED ENGINE SPEED SHALL BE 2000 TO 2500 RPM.

REMOVE ALL BURRS AND SHARP EDGES.

(2) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

(2) THIS DRAWING AND THE APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

NOMINAL USE OF THIS DRIVE IS FOR FUEL PUMP FOR RECIPROCATING ENGINES ONLY.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. The drawing supersedes all nonstandard standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

APPROVED 6 Nov 46 REVISED (1) 15 Jul 49 (2) 4 Mar 53

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

DRIVE - TYPE XIII ENGINE ACCESSORY

AND20003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.