26 April 1988
SUPERSEDING
MIL-B-49430/4(ER)
11 December 1981

MILITARY SPECIFICATION SHEET

BATTERY. NON-RECHARGEABLE, LITHIUM SULFUR DIOXIDE BA-5567/U

This specification sheet is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lithium sulfur dioxide primary battery type described herein shall consist of this document and the issue in affect of Specification MIL-B-49430(ER).

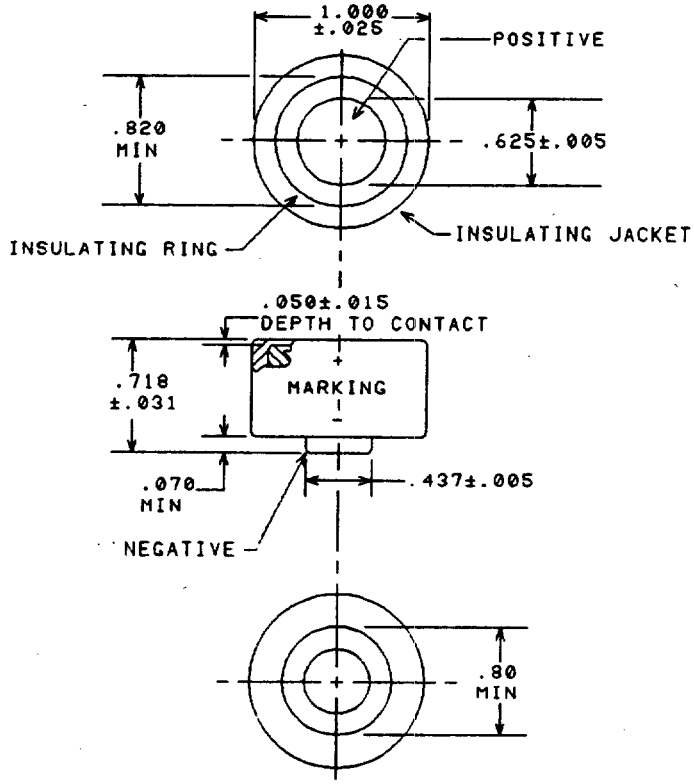

NOTE:
ALL DIMENSIONS
ARE IN INCHES

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Maximum Voltage: 3.05 volts.

Minimum Voltage (for capacity): 2.00 volts.

Terminals: (See figure 1).

Weight (maximum): 0.7 ounces (20 grams)

Fuse: No fuse is required.

High temperature switch. Not required.

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity Tests	Battery Capacity in hours to 2.00 Volts
I	16
L	9
H	14
HT	12.25
LT	8
T	15
D	14
ILR	1000

Initial voltage delay: when the battery is subjected to the I, H, HT, T, D and ILR capacity tests, initial closed-circuit voltages below 2.00 votls cannot exceed a 5.0 second duration. For the L and LT capacity tests initial closed-circuit voltages below 2.00 volts cannot exceed a 10.0 second duration.

METHOD OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage: Details on storage conditions for all specified capacity tests are described in basic specification.

(2) Discharge: Discharge current shall be 50-ma constant current except for the ILR test which shall be through a fixed resistance of 4000 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

Closed circuit voltage: Load resistance of 20 ohms shall be used. Voltage shall be above two volts within five seconds.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CUSTODIAN:
ARMY-ER

PREPARING ACTIVITY:
ARMY-ER
(PROJECT 6135-A209-04)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 - 505-033/92337

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.