
MIL-C-55181/1C
23 June 1986
SUPERSEDING
MIL-C-55181/1B
7 Nov. 1985

MILITARY SPECIFICATION SHEET
CONNECTOR, PLUG, ELECTRICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55181.

CONNECTOR ASSEMBLY

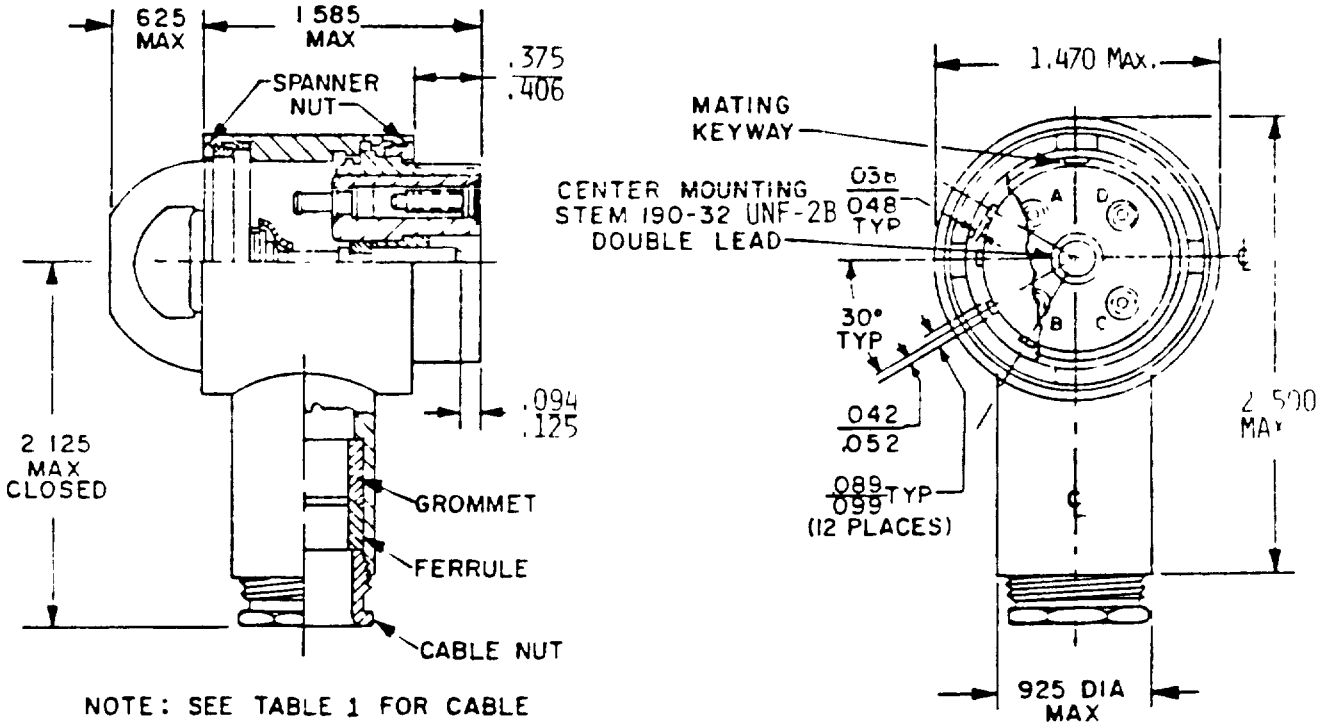

NOTE: SEE TABLE 1 FOR CABLE SIZE ACCOMMODATIONS


AMSC N/A

FSC 5935


DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:34Z
Check the source to verify that this is the current version before use.

NOSE PIECE ASSEMBLY

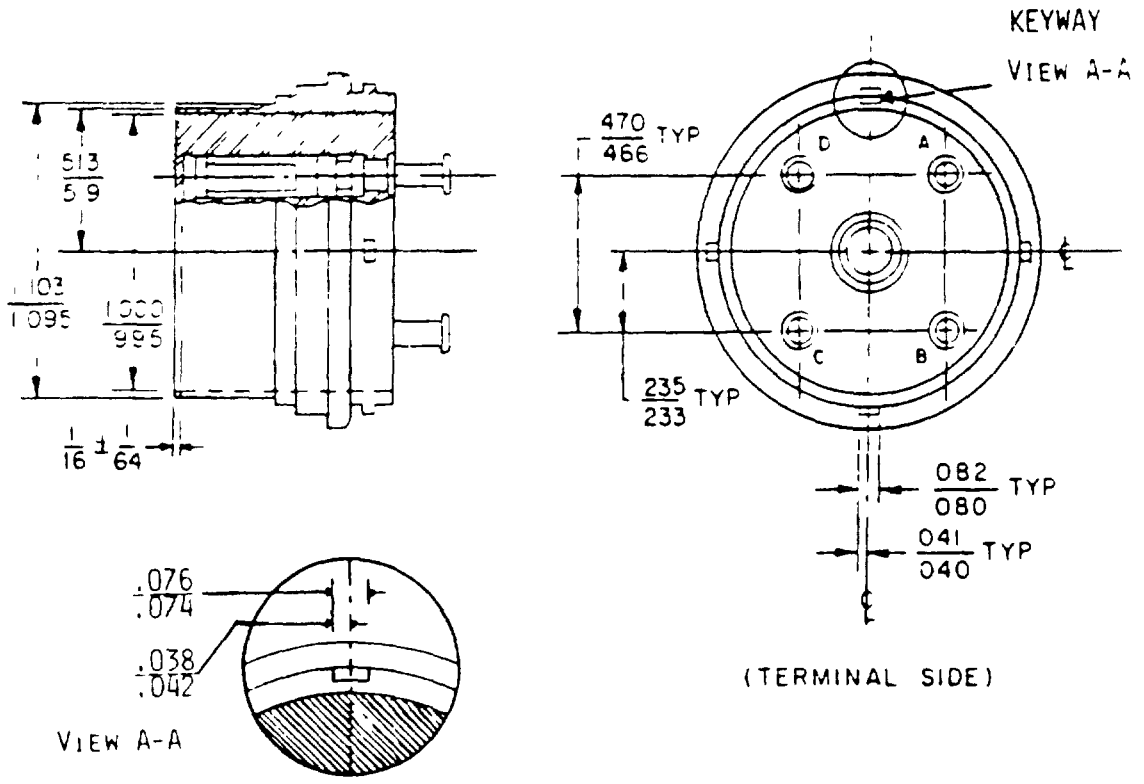

CONTACT

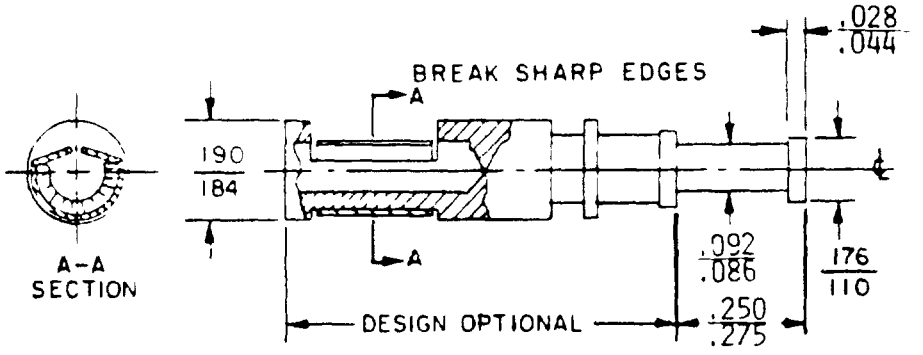

NOTES

1. DIMENSIONS ARE IN INCHES.
2. DIMENSIONAL TOLERANCE SHALL BE ± 005 UNLESS OTHERWISE SPECIFIED
3 ANGULAR TOLERANCE SHALL BE ± 30 MIN UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration

Gages See drawing SC-GL-323024

Mating connector M55181/2-01

Contact current rating 35 amperes

Part number M55181/1-(dash number from table I)

TABLE I Dash number, cross reference, and intermating table

New mil P/N	1/ Type designator	Cable size accomodation Min	Max	Mates with New mil P/N	1/ Type designator
M55181/1 01	MW10F(M)A11	.292	343	M55181/2-01	MW20M(M)A00
M55181/1-02	MW10F(M)A13	.323	406	M55181/2-01	MW20M(M)A00
M55181/1 03	MW10F(M)A 17	448	531	M55181/2-01	MW20M(M)A00
M55181/1 04	MW10F(M)A 19	511	593	M55181/2-01	MW20M(M)A00
M55181/1-05	MW10F(M)A15	.386	.468	M55181/2-01	MW20M(M)A00

1/ this type designator shall not be referenced for procurement purposes

Custodians
Army - CR
Navy - EC
Air Force 85

Review activities
Army -
Navy -
Air Force - 11, 99
DLA - ES

Preparing activity
Army - CR

(PROJECT 5995-3569-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:34Z
Check the source to verify that this is the current version before use.