INCH-POUND

MIL-PRF-49471/8(ER)
2 June 1995

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-X600/U

This specification is approved for use within Army Research Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-49471(ER).

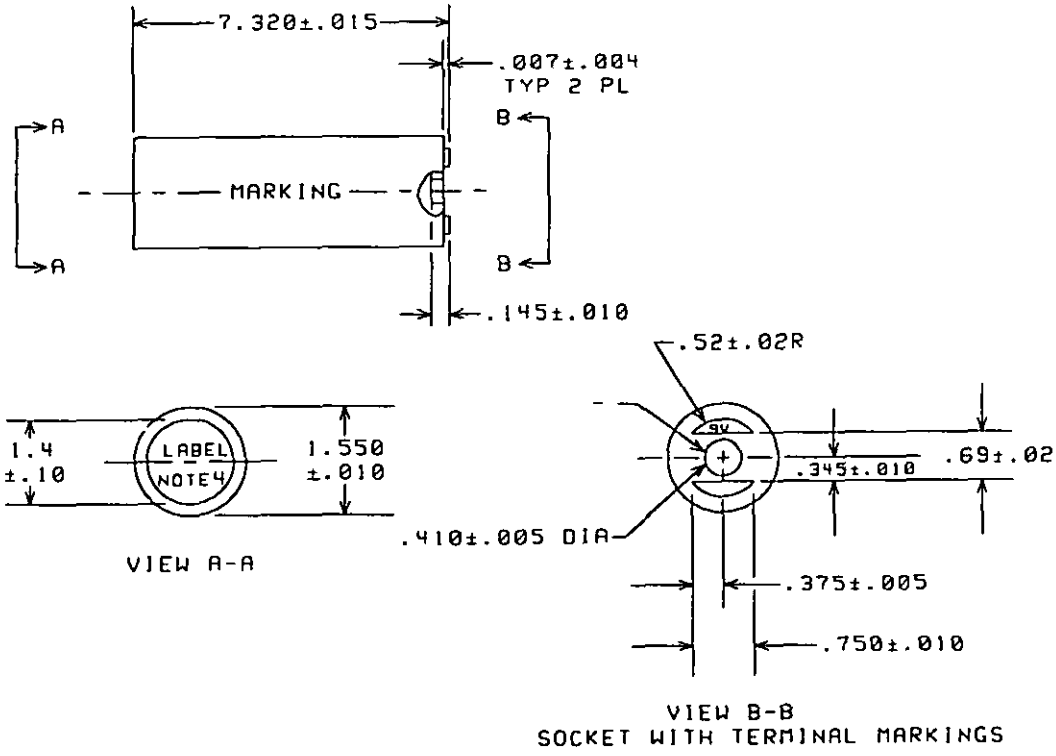


Figure 1. Battery dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. The battery case shall be fabricated in such a way as to allow cell venting upon provocation without rupture.

3. The battery terminals shall consist of two raised crescent-shaped (positive) terminals surrounding one central, recessed disc (negative) terminal. All terminals are integral with one end of battery (see Figure 1).

4. Adhesive decal shall be red/orange: Decal markings shall be in black letters (3/32 inch high) "This End Out", "Date Installed".

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 9.15 volts.

Minimum voltage for capacity: 6.00 volts.

Safety features: Applicable.

Charge protection device: Applicable.

High temperature device: Applicable.

Complete discharge device: Applicable.

Terminals: Two (2) positive and one (1) negative terminals, all at one end of battery (see note 4).

Weight (maximum): 0.8 pound (363 grams).

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below:

Capacity Test	Minimum Capacity Requirement in Hours to 6.00 Volts
I	3.2
L	1.8
H	5.6
HT	5.4
LT	1.6
IT	2.7

Source: https://assist.dla.mil Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Initial voltage delay: During the I, H, HT, and IT discharge tests, initial voltages below 5.70 volts cannot exceed a 5.0 second duration. During the L and LT discharge tests initial voltages below 5.70 volts cannot exceed a 60.0 second duration.

METHODS OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage:

Details on storage conditions for all capacity tests are specified in basic specification.

(2) Discharge:

Cells (forced discharge): Two cells shall be discharged at 2.0 amperes at 70±5°F to 2/3 of open-circuit voltage. Each discharged cell shall then be connected in series to two fresh cells. Each string shall be discharged at 2.0 amperes at 70±5°F to 2/3 open-circuit voltage of the two fresh cells.

Batteries: For all capacity tests, except the H and HT the batteries shall be discharged at two amperes constant current to zero volts. For the H and HT capacity tests the battery shall be discharged through two amperes constant current for five minutes followed by open circuit for five minutes. This cycle shall be repeated until closed-circuit voltage reaches zero volts.

Closed-circuit voltage test: Load resistance of 8 ohms shall be used. Voltage shall be above 6.00 volts within 5.0 seconds.

Custodian:
Army - ER

Preparing Activity
Army - ER

(Project 6135-A274-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.