MILITARY SPECIFICATION SHEET
POSTS, BINDING, ELECTRICAL, WATERPROOF (INSULATED), TYPES PB10NA01 AND PB10NA02

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the binding post described herein shall consist of this specification and the latest issue of MIL-P-55149.

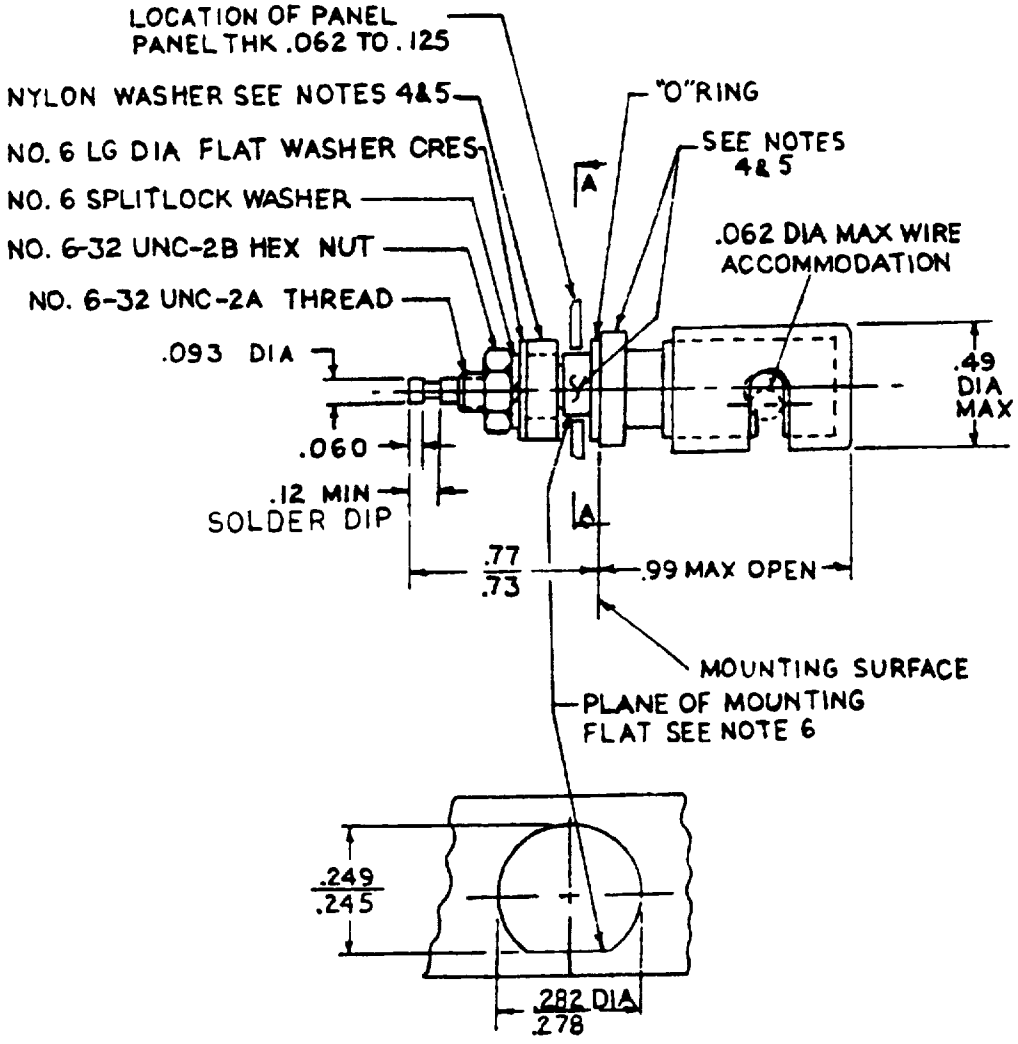


Figure 1. Dimensions and Configuration.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

DRAWING NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based on 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .XXX±.015 (.38 mm).
4. These areas are insulated portions.
5. Material: nylon. Color: Same as cap color (preferred) or natural.
6. Plane of mounting flat is within ±5° of the plane of the wire open.

REQUIREMENTS:

Dimensions and configuration: See figure.

Metal finish: Nickel plate.

Solder terminal end finish: Tin/lead coat.

Cap material: Rubber.

Dielectric withstanding voltage:

(a) Special preparations and conditions: The binding post shall be mounted in its recommended mounting hole with its "O" ring and shall be torqued to 10 in-lbs.

(b) Magnitude of test voltage: 1200 Vac rms.

Solderability of solder terminal end: Applicable.

Contact resistance test: Applicable.

Insulation resistance test: Applicable.

Conductor retention: Method II.

Panel seal test: Applicable.

Moisture resistance test: Applicable.

Thermal shock: Applicable.

Vibration test: Applicable.

Shock test: Applicable.

Salt spray test: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

Torque test:
Special preparations and conditions: The binding post shall be mounted in its recommended mounting hole with its "O" ring and a torque of 10 in-lbs. applied to the cap in a clockwise direction.

Life test: Applicable.

Type designation	Cap color
M55149/10-NA-01	Black
M55149/10-NA-02	Red

Custodians:
Army-ER
Navy-EC
Air Force-85

Review activities:
Army-AT, MI
Navy-
AirForce-99
DLA-GS

User activities:
Army-ME
Navy-AS,MC,OS
Air Force-

Preparing Activity:
Army-ER

(Project 5940-1007)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.