MIL-T-55156/3
16 JANUARY 1962

MILITARY SPECIFICATION

SPLICES, CONDUCTOR, STYLE LP03

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for style LP03 conductor splices.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-T-55156 — Terminals, Lug; Splices, Conductor; Screw Type; General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS


3.1 Requirements. Requirements shall be in accordance with Specification MIL-T-55156, and as specified herein.

3.2 Design and construction. Conductor splices shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 Conductor accommodations. Conductor accommodations shall be designed for attaching conductors end to end with their axes concentric.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

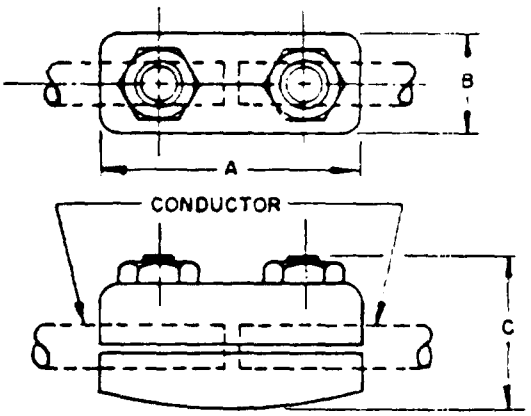

Item No.	Terminal size	Dimensions			Rated current	Voltage drop	Tensile strength
		A (max)	B (max)	C (max)	Amperes, max	Volt, max	Pounds, min
1	14	1 ¾	⅜	⅜	32	0.026	83
2	12–10	1 ¾	⅜	⅜	66	0.026	115
3	9	1 ¾	⅜	⅜	92	0.026	145
4	8	1 ¾	⅜	⅜	117	0.023	180
5	6	1 ¾	⅜	⅜	142	0.023	220
6	5	1 ¾	⅜	⅜	165	0.023	260
7	4	2	1 ⅛	1 ⅛	189	0.021	325
8	3	2	1 ⅛	1 ⅛	215	0.021	390
9	2	2	1 ⅛	1 ⅛	252	0.021	450
10	1	2 ¼	1 5/16	1 5/16	300	0.021	490
11	0	2 ¼	1 5/16	1 5/16	345	0.021	530
12	00	2 ⅜	1 7/16	1 7/16	400	0.021	570
13	000	2 ⅜	1 7/16	1 7/16	455	0.021	650
14	0000	2 ½	1 13/16	1 13/16	540	0.021	750
15	250 MCM	2 ½	1 13/16	1 13/16	670	0.021	875
16	400 MCM	3 ⅛	2 1/16	2 1/16	748	0.021	1,300
17	500 MCM	3 ⅛	2 1/16	2 1/16	900	0.021	1,475
18	650 MCM	3 ¾	2 5/16	2 5/16	1,000	0.021	1,850
19	800 MCM	3 ¾	2 5/16	2 5/16	1,190	0.021	2,100
20	1,000 MCM	4 ¼	2 11/16	2 11/16	1,375	0.021	2,400
21	1,500 MCM	5 ¾	3 ⅝	3 ⅝	1,800	0.021	2,800
22	2,000 MCM	5 ¾	3 ⅝	3 ⅝	2,000	0.021	2,800

1. All dimensions in inches.
2. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

FIGURE 1. *Style LP02 conductor splices.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

3.3 Voltage drop. The voltage drop shall be as specified on figure 1, as applicable.

3.4 Tensile strength. The tensile strength shall be as specified on figure 1, as applicable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with Specification MIL-T-55156.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-T-55156.

6. NOTES

6.1 The notes specified in Specification MIL-T-55156 are applicable to this specification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:

Army—SigC

Navy—Ships

Air Force

Preparing activity:

Army—SigC

* U. S. GOVERNMENT PRINTING OFFICE: 611043—1959—(784)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.