INCH-POUND

MIL-T-55164/24C

21 November 1988

SUPERSEDING
MIL-T-55164/24B
24 September 1976

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 26TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

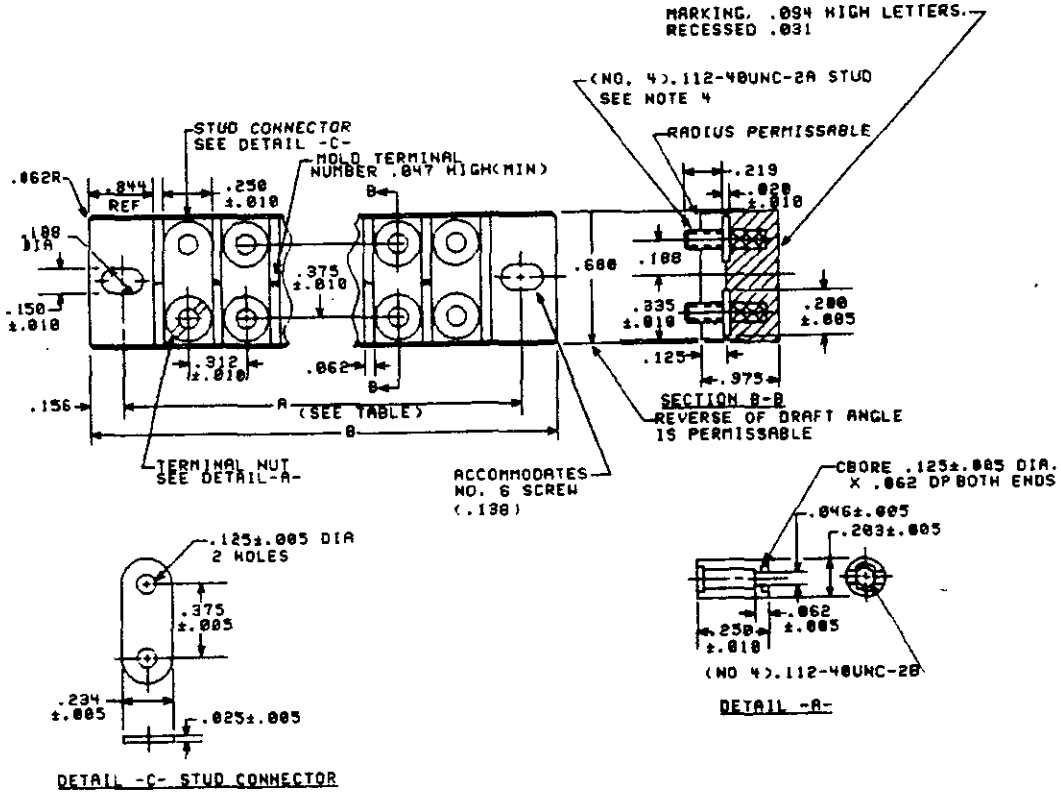


Figure 1. Dimensions and Configuration.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±0.016 inch.
4. Studs shall be threaded to within 0.046 inch of the stud shoulders.

Type Designation 1/	Dimensions		Recommended wire terminal lugs		Terminal nuts required	Stud connectors required
	A+.031, -.016	B+.031, -.062	MS-21004	MS-17143		
	inch (mm)	inch (mm)				
26TB2_	1.062 (26.97)	1.375 (34.93)			4	2
26TB6_	2.312 (58.72)	2.625 (66.68)	-1	-19	12	6
26TB8_	2.938 (74.63)	3.250 (82.55)	-8	-20	16	8
26TB10_	3.562 (90.47)	3.875 (98.43)	-15	-21	20	10
26TB12_	4.188 (106.38)	4.500 (114.30)			24	12

1/ Add letter "F" or "H" for temperature range to complete type designation.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table 1.

Voltage rating (maximum): 300 volts.

Current rating: 20 amps.

Maximum number of terminal lugs for each stud:

MS21004-1	2
MS21004-8	2
MS17143-19	2
MS17143-20	2
MS21004-15	1
MS17143-21	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

With the stud connector removed, this terminal board shall provide twice the number of connection points and shall allow for an additional terminal lug per stud terminal, however, this removal shall reduce the current rating to 20 amps.

Studs, stud connectors and nuts for class "H" terminal boards shall be corrosion resistant steel in accordance with class 304 of QQ-S-763.

Plastic material: See table II.

Dielectric withstanding test voltage: 1600 volts rms.

TABLE II - Plastic Material.

Terminal Board Class 1/	Maximum Temperature (^{o}C)	Material	Applicable Specification
F	155	GDI-30F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher temperature classification may be substituted for a lower temperature classification terminal board.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:

Army-ER
Navy-
Air Force-85

Preparing Activity:

Army-ER

(Project Number 5940-1017-16)

Review Activities:

Army-MI
Navy-
Air Force - 99
DLA -GS

User Activities:
Army-AV, AT, ME
Navy - MC, AS, SH
Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.